Date Printed: 2013/08/30
User Id: IDIR\TYSMILLE
Database: PROD
Report Id: CBR001A

BC Ministry of Forests and Range

Permanent Bridge Inspection Report

Structure #:	CK-2289	**Site #:**	CK-2289	**Road Name:**	UZTLIUS CREEK	**Inspection Date:**	2013/08/20
KM:	8.70	**User km:**	8.70	**Crossing Name:**	not known	**Next Inspection Date:**	2016/08/20
Project File ID #:	7972	**Br.**	01	**Forest District:**	Chilliwack Forest District		

Deck Type:	Concrete Composite		**Running Surface:**	Concrete	
Superstructure	Steel I-beam		**Abutments (Left/Right):**	Steel Pipe and Precast Pad	
Total Length *(metres)*:	16.7	**# Spans:**	1	**Span Length(s)** *(metres)*:	0
UTM Zone:	10	**UTM Easting:**	617978	**UTM Northing:**	5522413
Inspector Name:	T. Miller	**Year Built:**		1999	

Access: Updated by M.Kirk, Onsite Engineering Ltd, Feb 2011

ABUTMENTS

Bearings	Good	
Bracing	Good	
Ballast Wall	Good	
Corrosion Protection	Good	
Caps or Sills	Good	steel plates and rubber pads
Fill	Fair	eroding downstream right bank
Hardware	Not Applicable	
Piles or Posts	Good	
Riprap	Fair	eroded downstream right bank
Wing Wall	Not Applicable	

APPROACHES

Alignment	Fair	
Bridge Ahead Signs Missing	2	
Brushing Required	Yes	
Delineator Missing Left	0	
Delineator Missing Right	1	
Fender Condition	Fair	logs
Posted Load Rating	not	not posted
Road Surface	Fair	

DECK

Span 1

Concrete Deck	Fair	
Curb Rail/Blocks/Posts	Poor	rotting risers and blocks
Deck Joints	Fair	

BC Ministry of Forests and Range

Permanent Bridge Inspection Report

Structure #:	CK-2289	Site #:	CK-2289	Road Name:	UZTLIUS CREEK	Inspection Date:	2013/08/20

Grout Pockets	Fair	
Hardware	Poor	loose rail bolts
Hand Rails/Walkouts	Not Applicable	
Overall Deck Condition	Poor	due to rail
Running Surface	Fair	sediment on deck

SUPERSTRUCTURE

Span 1

Bracing	Good	bolted
Diaphrams	Good	4 bays, bolted
Girders	Good	2 steel I-beams
Hardware	Good	
Under Trussing	Not Applicable	

CHANNEL

Estimated Present Water Level Depth:	0.2	**Estimated Present Water Level Width:**	3.0
Estimated High Water Level Clearance:	3.0		

HAZARDS

High Water:	No	**Scour:**	No	**Ice:**	No	**Debris:**	No	**Aggradation:**	No
Comment:									

REPAIRS

#	Status	Priority	Estimate	Description
1	Recommended	High	$1.00	replace guardrail, risers and blocks
2	Recommended	Medium	$1.00	post bridge ahead signs and missing delineator

MONITORS

#	Description
1	downstream right bank erosion

GENERAL

Professional Inspection Required?	No	**Regional Review Date:**	2013/08/30	**P. Eng Reviewer Name:**	Tyson Miller
Replacement Date for full log haul traffic *(year)*:	2044	**Replacement Date for light vehicle traffic** *(year)*:	2044		
Current Load Rating GVW *(tonnes)*:	68	**Design Load GVW** *(tonnes)*:	68	**Design Vehicle Config.:**	L75
Inspector's Estimated Full Log Haul Replacement *(year)*:					

Inspector's Comment:	
PEng Reviewer's Comment:	Replace guardrail, risers and blocks. Post bridge ahead signs and replace missing delineator. Monitor downstream right bank erosion. Present load rating of L75 or 68 tonnes to continue.

BC Ministry of Forests and Range

Permanent Bridge Inspection Report

Structure #:	CK-2289	Site #:	CK-2289	Road Name:	UZTLIUS CREEK	Inspection Date:	2013/08/20

District Staff Comment:

PROFESSIONAL ENGINEER
PROVINCE OF BRITISH COLUMBIA
T. W. MILLER
35995

Aug 30/2013
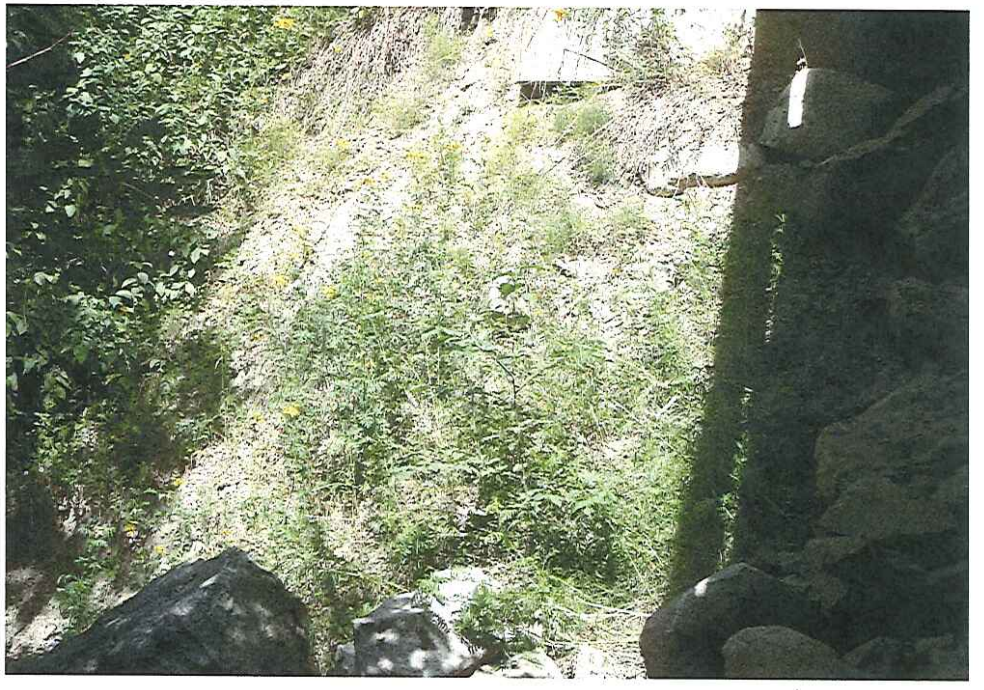
8