



File: 195-30/CAPP

December 15, 1993

All Regional Managers and
All Holders of the Coast Appraisal Manual

Re: Coast Appraisal Manual

I hereby approved the new *Coast Appraisal Manual* and attach a copy of it for your use.

This manual is effective as of January 1, 1994. It applies to all stumpage appraisals in the Coast portions of the Vancouver and Prince Rupert Forest Regions.

Amendments or revisions to this manual require my further approval.


for Andrew Petter
Minister of Forests

MINISTRY OF FORESTS

COAST APPRAISAL MANUAL

Effective from January 1, 1994

(Cost Base: July 1, 1992)

Table of Contents

Introduction.....	1 1
1.1 Terms of Reference.....	2
1.2 Area of Application.....	2
1.3 Cutting Authority.....	3
1.3.1 Cutting Authority Area.....	3
1.4 Responsibility for Stumpage Determination.....	3
1.5 Comparative Value Timber Pricing.....	4
1.6 Stumpage Rate Adjustments.....	5
Appraisal Principles & Procedures.....	2 1
2.1 Types of Determination.....	2
2.2 Time Schedule - New Appraisals and Reappraisals.....	2
2.3 Reappraisal.....	3
2.4 Extension of Term.....	6
2.5 Point of Appraisal.....	6
2.6 Calculation Conventions.....	7
2.7 Immature Coniferous Timber.....	7
Selling Price Estimation.....	3 1
3.1 Average Market Value (AMV) Determination.....	2
3.2 Log Grade Percentages.....	2
3.2.1 Selection of Log Grade Percentages.....	2
3.2.2 Billing Period.....	3
3.2.3 Sources of Log Grade Percentages for Each Cutting Authority.....	4
3.2.4 Damaged Timber.....	4
3.2.5 Low Volume Cypress Exception.....	4
3.3 Calculation of Stand Selling Price (SP).....	5
Operating Cost Estimation.....	4 1
4.1 Cost Estimates.....	2
4.1.1 Specified Operations.....	3
4.2 Appraisal Data Requirements.....	4
4.3 Development.....	5
4.3.1 Development Cost Categories.....	6
4.3.1.1 Development Cost Allocation.....	10
4.3.2 Tabular Cost Estimates.....	15
4.3.2.1 Subgrade Construction.....	15
4.3.2.2 Drainage Structures.....	19
4.3.2.3 Additional Stabilizing Material.....	20

4.3.3 Detailed Engineering Cost Estimates.....	23
4.3.3.1 Data Requirements.....	23
4.4 Tree To Truck	25
4.4.1 Conventional Logging	25
4.4.2 Helicopter Logging.....	26
4.5 Log Transportation	28
4.5.1 Truck Hauling	28
4.5.2 Water Transportation.....	29
4.5.2.1 Dump, Sort, Boom and Scale	29
4.5.2.2 Towing or Barging	29
4.5.3 Routine Maintenance	32
4.5.4 Road and Land Use Charges	32
4.6 Administration and Other Costs.....	34
4.6.1 Overhead.....	34
4.6.2 Woods Run	34
4.6.3 Accommodation	36
4.6.4 Low Volume Cost Estimate Additive.....	37
4.7 Total Logging Cost Estimate.....	37
4.8 Basic Silviculture	37
4.9 Cost Trend.....	38
Stumpage Rate Determination	51
5.1 Indicated Stumpage Rate.....	2
5.2 Value Index	2
5.3 Mean Value Index.....	2
5.4 Market Value Indexing.....	3
5.5 Base Rate.....	4
5.6 Calculation of Stumpage Rate	4
5.6.1 Calculation of Indicated Stumpage Rate.....	4
5.6.2 Prescribed Minimum Stumpage Rate.....	4
5.6.3 Reserve Stumpage Rate.....	4
5.6.4 Upset Stumpage Rate	4
5.6.5 Total Stumpage Rate	4
Misc. Timber Pricing Policies.....	61
6.1 Value Indexes by District and Species	2
6.2 Cutting Authorities With 5 000 m ³ or Less Volume	2
6.3 Partially Harvested Timber	3
6.4 Small Business Forest Enterprise Program (SBFEP) Sales.....	3
6.5 Levies	3
6.6 Miscellaneous Stumpage Rates.....	5
Appendices	71
Appendix I Equipment and Labour Rates	2
Appendix II Reconstruction and Replacement	4

Appendix III	Development Cost Allocation.....	5
Appendix IV	Rock Mass Classification.....	6
Index		I 1

Introduction

1

1.1 Terms of Reference

The *British Columbia Forest Act*, Sections 81 to 86, and attendant regulations set out the conditions that apply to the determination and payment of stumpage for the purchase of Crown timber.

The Forest Act, Section 84, requires adherence to the policies and procedures approved for the Forest Region by the Minister of Forests. This Coast Appraisal Manual, approved by the Minister as required by the Forest Act, contains the policies and procedures for determining stumpage rates charged for Crown timber harvested in the area described in Section 1.2.

Data used in the manual are based on a broad sampling of timber harvesting costs experienced by licensees on the Coast. Log selling prices are derived from sales data compiled by the Ministry of Forests.

1.2 Area of Application

This manual applies to the "Coast" which is defined as that geographic area included within the Vancouver Forest Region, as established by the Forest Act and Regulations, and that part of the Prince Rupert Forest Region west of the Cascade Mountains Administrative Line from Tweedsmuir Park to the State of Alaska.

There is one exception to the above delineation, where timber in that portion of the Kalum Forest District, lying west of the Cascade Mountains Administrative Line is appraised using the Interior Appraisal Manual.

For appraisals and reappraisals made after December 31, 1993 the above definition for Area of Application will apply.

1.3 Cutting Authority

The term "cutting authority" means one of the following documents authorizing the harvest of a cutting authority area:

1. a cutting permit issued under:
 - a) a forest licence,
 - b) a timber sale licence that provides for the issuance of cutting permits,
 - c) a tree farm licence,
 - d) a woodlot licence;
2. a timber sale licence that does not provide for the issuance of cutting permits, not including any proposal deemed to be a part of the licence;
3. a licence to cut;
4. a road permit.

1.3.1 Cutting Authority Area

The term "cutting authority area" means the area of stumpage-bearing timber that:

1. is authorized for harvest under a cutting authority, and
2. has a unique timber mark.

1.4 Responsibility for Stumpage Determination

The *Forest Act, Section 84(1)*, states in part that the rates of stumpage shall be determined, redetermined and varied by the Regional Manager or a Forest Officer authorized by him in accordance with the policies and procedures approved for the Forest Region by the Minister of Forests.

The Regional Appraisal Coordinator is the Forest Officer authorized by the Regional Manager to be directly responsible for determining stumpage rates, for both appraisals and reappraisals and providing interpretation of this manual in a manner that is consistent with the policies and procedures approved by the Minister.

Valuation Branch employees are Forest Officers for the purpose of carrying out stumpage rate adjustments under Section 1.6.

1.5 Comparative Value Timber Pricing

Comparative Value Pricing, (CVP) subject to a minimum stumpage rate, is the basis for determining stumpage rates with the exceptions noted in subsection 2.1 (b, c and d).

An average stumpage rate for the Coast has been set by the provincial government. The stumpage rate for a given stand of timber is more or less than the pre-set average rate depending upon whether the stand is more or less valuable than the average stand. To make that assessment and hence to determine a stumpage rate, the Forest Officer will typically:

- a) estimate the selling price of the products that can be recovered from the timber stand (see Chapter 3);
- b) estimate the costs necessary to harvest the timber and realize the estimated selling price (see Chapter 4);
- c) determine the Value Index (see Chapter 5) of the timber stand by subtracting the estimated operating cost from the estimated selling price;
- d) determine the indicated stumpage rate by comparing the Value Index for the timber stand with the Coast Mean Value Index (see Chapter 5).
- e) determine the reserve stumpage rate (see Chapter 5) by selecting the greater of the indicated stumpage rate or the prescribed minimum stumpage rate (as defined in the Minimum Stumpage Rate Regulation, B.C. Reg. 354/87). The current minimum stumpage rate is \$0.25/m³.
- f) determine the upset stumpage rate by adding any development or silviculture levies (see Section 6.5) to the reserve stumpage rate.
- g) determine the total stumpage rate by adding any bonus bid to the upset stumpage rate.

One stumpage rate is determined for all appraised timber in each cutting authority with the exception of miscellaneous stumpage rates for special forest products and for timber in specified areas listed under Section 6.6.

The average stumpage rate itself is indexed to lumber market values as explained in Chapter 5.

1.6 Stumpage Rate Adjustments

Unless a cutting authority specifies that stumpage rates are fixed for a specified period or for the full term of the cutting authority, the stumpage rates are adjusted on January 1, April 1, July 1, and October 1 of each year. The new stumpage rates reflect any changes in estimated selling prices as authorized in this manual since the previous adjustment. In addition, the adjustment reflects changes to the Statistics Canada Softwood Lumber Index for the Coast, the Coast Base Rate, and the Coast Mean Value Index.

Appraisal Principles & Procedures 2

2.1 Types of Determination

Stumpage rates are determined by one of the following methods:

- a) a full appraisal as described under Chapters 3 and 4 of this manual;
- b) an Order-in-Council directive setting stumpage rates under the *Forest Act, Section 84*;
- c) pricing under Chapter 6 of this manual;
- d) the use of stumpage rates developed by Regional Valuation staff, and approved by the Regional Manager.

2.2 Time Schedule - New Appraisals and Reappraisals

Timeliness is an important factor in the stumpage appraisal process. The following schedule applies:

- a) For each cutting authority, the licensee must submit to the District Manager an appraisal data submission (Coast Appraisal Data Sheet) at least 90 calendar days prior to the appraisal effective date for new appraisals or at least 60 calendar days prior to the anniversary date for reappraisals.

If the licensee fails to provide an appraisal data submission as stated above, then the District Manager must use the best appraisal information available to him;

- b) The District Manager or his designate reviews the submitted data and all other available information, signs the appraisal data sheet and notifies the licensee or;
- c) The District Manager or the licensee may request a meeting to discuss the appraisal data submission;
- d) At the meeting, the licensee may clarify data previously submitted. The District Manager may revise the appraisal data sheet as a result of the meeting;
- e) The licensee is notified by the District Manager of changes, if any, made to the appraisal data after the meeting;
- f) The appraisal data sheet is then sent to the Regional Office by the District Manager as part of the valuation package;
- g) The licensee and District Manager are notified by the Regional Appraisal staff of any further changes made to the appraisal data sheet;

- h) The licensee is notified, by letter and facsimile transmission, of the stumpage rate and a summary of the appraisal information used in determining the stumpage rate.
- i) The Licensee must advise the issuing Regional Office in writing of any disagreement with the information contained in the stumpage advisory notice and provide adequate factual data to permit a review;
- j) After such a review, the Regional Valuation staff sends a letter notifying the Licensee, by mail and facsimile transmission, of the results of the review and summary appraisal information.

2.3 Reappraisal

A reappraisal is a re-estimation of Operating Cost, Log Grade Percentages, and Selling Price according to the Appraisal Manual in effect on the effective date of the re-estimation. Except in the case of "sudden and severe damage" as explained below, a reappraisal is based upon a complete reassessment of a cutting authority carried out by "standing up the trees, unbuilding the roads and drainage structures and returning the stand to its original condition" before making a re-estimate of the operating costs. The operating cost data may be revised or left unchanged at the time of reappraisal. At the time of a reappraisal, initial detailed engineering cost estimates may be re-estimated once after construction to reflect more accurate on-site information.

A reappraisal is made only if one of five situations arises:

1. Sudden and Severe Damage

If the Regional Manager is satisfied that sudden and severe damage has occurred to the appraised timber, the cutting authority is reappraised upon the licensee's request. *The effective date of the redetermined rate is the first of the month following the occurrence of the damage*, unless otherwise specified by the Regional Manager. A reappraisal is not made in the case of fire damage caused by the licensee if he has failed to comply with the *Forest Act, Part 10*, and relevant regulations.

In the case of "sudden and severe damage" the redetermined stumpage rate is based upon the remaining timber only. The Regional Manager may approve the use of appraisal data obtained from comparable cutting authorities. The reappraisal cost estimate for development takes into account volume already removed.

This policy on "sudden and severe damage" applies to fixed rate cutting authorities as well as to adjustable rate cutting authorities. Any existing bonus bid is payable in addition to the redetermined upset stumpage rate.

2. Amendments

If accumulated amendments (either addition or deletion of stumpage bearing area containing merchantable timber) made to the cutting authority exceed 25 hectares or 25% of the merchantable area, whichever is less, then the entire cruise must be recompiled and the stumpage rate redetermined.

The redetermined stumpage rate becomes effective on the first of the month following the notice to the licensee which approves the amendment.

3. Reappraisal at Anniversary Date

"Anniversary date" means the annual recurrence of the month and day when the term of the cutting permit, or where there is no cutting permit, the term of the licence, began.

Effective January 1, 1994 a reappraisal must be carried out on all adjustable stumpage rate cutting authorities with subsequent anniversary dates when the following conditions are satisfied:

- i) timber is expected to be scaled on the cutting authority during the next year, and
- ii) there is at least 2 000 m³ of all merchantable timber remaining on the cutting authority.

Where the above conditions have not been met, reappraisals may be made at either the District or Regional Manager's or licensee's option (See Section 2.2 Time Schedule - New Appraisals and Reappraisals).

These reappraisals are made in accordance with the appraisal manual in effect on the anniversary date. In this case the effective date of the redetermined stumpage rate is the anniversary date.

If a reappraisal is not made, the untrended logging and silviculture cost estimates from the current appraisal will continue to be trended quarterly to determine stumpage rates.

4. Error in Appraisal

If a mathematical error is discovered in the most recent appraisal, the cutting authority is reappraised with the exception of Small Business Forest Enterprise Program Sales where the licensee has elected fixed rates (see Section 6.4). The effective date of the redetermined rate is the first of the month following the data upon which notification of the error was given. There is no retroactive change to the stumpage rate.

A mathematical error is defined as consisting only of:

- i) an error in transcribing or compiling approved cruise field data, or in the application of approved loss factors and taper equations;
- ii) an error in a calculation made as part of the Appraisal Data Sheet;
- iii) an error in transcribing the data from an approved Appraisal Data Sheet or in performing the calculations specified in this manual; or
- iv) an error in the application of published appraisal parameters.

A difference between cruise estimates and actual timber quality or quantity does not constitute an error in the appraisal.

A difference between appraisal estimates of selling price or operating cost and the licensee's experience does not constitute an error in the appraisal.

5. Minister's Direction

The Minister of Forests may direct that a reappraisal be made at any time and that the redetermined stumpage rate be effective *on any future date*. The reappraisal is made according to the appraisal manual in effect on the effective date of the reappraisal.

2.4 Extension of Term

- a) When a licensee has elected the fixed stumpage rate option for a Timber Sale Licence in the small Business Forest Enterprise Program, that stumpage rate remains fixed for the term and all extensions.
- b) When a Woodlot Licensee has a cutting authority where the term is for two years or less, he may elect the fixed stumpage rate option. That fixed stumpage rate shall remain in effect for the term and all extensions.
- c) When the stumpage rate was fixed other than by the election of the fixed rate option and the term is extended, the Regional Manager may either extend that stumpage rate or reappraise the cutting authority.
- d) Miscellaneous stumpage rates for special forest products will be based on the appraisal manual rate table in effect on the date of scale, except for those cutting authorities that contain miscellaneous stumpage rates specified in their cutting authority document.

2.5 Point of Appraisal

Cutting authorities are appraised to the point of appraisal that results in the least total operating cost estimate.

The recognized Points of Appraisal are:

<u>Location</u>	<u>Code</u>	<u>Details</u>
Alberni	ALBE	The head of Alberni Inlet
Chemainus	CHEM	Tie-up grounds in the vicinity of Chemainus representing the facilities from Nanaimo Harbour to Cowichan Bay
Gambier Island	GAMB	Representing all facilities in the Howe Sound area
Pitt River Bridge	PIRV	Representing the facilities near the confluence of the Fraser and Pitt Rivers.

2.6 Calculation Conventions

All operating cost calculations are performed to the full capacity of the calculating machine with the results truncated at four places of decimals and rounded to two places.

Results from 5 to 9 are rounded upward and from 1 to 4 rounded downward.

After each phase cost estimate (\$/m³) has been rounded to the nearest cent, it is summed with other estimates to obtain the total cost estimate.

Where values are specified as limits (constraints or requirements for equations), they are treated as absolute values and actual measurements or records are not rounded before use unless otherwise specified.

Stumpage rate calculations are performed according to the methods specified in the document entitled **SPECIFICATIONS: CALCULATING STUMPAGE RATES FOR COAST APPRAISALS** approved by the Director, Valuation Branch.

2.7 Immature Coniferous Timber

Immature coniferous timber is defined as being less than 121 years old (Timber Utilization Policy).

The volume of mature and immature timber will be compiled on a tree by tree basis and the percentage of the total coniferous Cutting Authority volume represented by the Immature timber will be calculated.

Using this calculated percentage, any Cutting Authority that contains 80% or greater immature coniferous timber volume will be appraised as Immature timber using an Immature Average Market Value schedule.

Selling Price Estimation

3

Selling price estimates are based upon a schedule of log market values collected and published by Valuation Branch. These values when compiled and distributed become an integral part of this manual.

3.1 Average Market Value (AMV) Determination

Invoiced (f.o.b.) market values are collected and compiled from prime, domestic, arms-length sales reported to occur in areas adjacent to the Strait of Georgia; the Strait of Juan de Fuca and the Alberni Inlet east of a line drawn south from Amphitrite Point; Johnstone Strait; the Queen Charlotte Strait south of a line drawn west from Cape Caution; and the Fraser River west of the bridge at the confluence of the Pitt River. The cut-off date for log market value input is approximately forty-five (45) days prior to the stumpage rate adjustment date.

A set of average market values by species and log grade is developed using sales data for each one-month reporting period. The data is accumulated into a six-month schedule of average market values by species and log grade for mature timber stumpage rate determinations. The same six-month schedule is adjusted on a species grade level to create a schedule for Immature average market values to be used for Immature stumpage rate determinations.

3.2 Log Grade Percentages

Log grade percentages are obtained for each species in each cutting authority as described under Sections 3.2.1, 3.2.2 and 3.2.3. Log grade percentages are determined from the billing history record (Section 3.2.2), except for appraisals of woodlots and appraisals of cutting authorities which meet the Immature timber criteria in Section 2.7.

For a Woodlot Licence and for any cutting authority consisting of Immature timber, unless the volume in Level 1 of Section 3.2.3 is 2 000 m³ for a given species, the log grade percentages predicted by the cruise compilation algorithm are used for that species.

Separation of cruise summary log grade data may be required for Cedar grades D and K, F and L, and I and M. These grades are separated by using the proportional grade percentages from the first qualifying level in the table in Section 3.2.3.

3.2.1 Selection of Log Grade Percentages

When selecting log grade percentages for a cutting authority, the following criteria apply:

- the source of log grade percentages may vary by species
- the minimum acceptable billed volume for the source of log grade percentages for a species shall be 2,000 m³; the only exception is that upon reaching the highest level of the table in Section 3.2.3 the species log grade percentage is used regardless of the billed volume.

3.2.2 Billing Period

"Billing history record" means the Ministry of Forests' record of stumpage-bearing log volume and grades for which invoices were issued during the period specified.

Log grade percentages are obtained from the two-year billing history record as follows:

<u>Effective Date of Appraisal/Reappraisal</u>	<u>Two-Year Billing Period Ending on the preceding:</u>
January 1 to March 31	November 30
April 1 to June 30	February 28/29
July 1 to September 30	May 31
October 1 to December 31	August 31

The data used are the volumes billed by species and grade during the two year period, not volumes scaled during that period.

All cutting authorities with appraisal/reappraisal dates occurring within a given quarter shall use the same billing history period.

3.2.3 Sources of Log Grade Percentages for Each Cutting Authority

The log grade percentage for each species in each cutting authority is determined from the billing history record at the level in the following table which first meets the criteria listed in Section 3.2.1.

<u>Level</u>	<u>All Cutting Authorities Within the Geographic Boundaries of a TFL/WSL</u>	<u>All Cutting Authorities within a TSA</u>
1	Cutting authority	Cutting authority
2	TFL/WSL Cutting Permit	Supply Block *
3	District Portion of TFL/WSL	TSA *
4	Entire TFL/WSL	Total Supply Block
5	N/A	Total TSA

Where: TFL = Tree Farm Licence. TSA = Timber Supply Area.
WSL = Watershed Licence. TSL = Timber Sale Licence

- * At this level, the billing history is for the Licence to which the cutting authority belongs, including replaceable TSL's within the Small Business Forest Enterprise Program (SBFEP). Where minimum criteria for the specific TSL are not met the SBFEP licence average should be used.

Note: For these purposes, the Small Business Forest Enterprise Program as defined in Section 6.4, is considered to be one "licence".

In all cases, the billing history record includes all forms of stumpage bearing cutting authorities only.

3.2.4 Damaged Timber

If the Regional Manager is satisfied that the timber in a cutting authority is significantly damaged, then log grade percentages are estimated on the basis of the site-specific information at hand. Section 3.2 does not apply.

3.2.5 Low Volume Cypress Exception

Where the cypress cruise volume is less than 2 000 m³, the J log grade market value is used for cypress grades D, F, H, I, J, K, L and M.

3.3 Calculation of Stand Selling Price (SP)

Subject to Section 3.2.4, the species selling price (ssp in \$/m³) for each species is determined using the percentage of each log grade and the corresponding average market value, as follows:

$$\text{ssp} = \frac{(\% \text{ grade B}) * (\text{AMV grade B}) + (\% \text{ grade C}) * (\text{AMV grade C}) + \text{etc.}}{100\%}$$

The selling price for each species is rounded to the nearest cent and used in the formula below to determine the stand Selling Price (SP in \$/m³), as follows:

$$\text{SP} = \frac{(\text{balsam selling price}) * (\text{balsam net cruise volume}) + (\text{cedar selling price}) * (\text{cedar net cruise volume}) + \text{etc.}}{\text{Total Net Cruise Volume (m}^3\text{)}}$$

For appraisals, in all cases and without regard to utilization requirements, the stand selling price is based upon the net cruise volumes and species selling prices of the following species only:

Alder	Fir
Balsam	Hemlock
Cedar	Lodgepole Pine
Cottonwood	W. White Pine
Cypress	Spruce

Operating Cost Estimation

4

The Operating Cost is the sum of the trended Total Logging Cost Estimate and the trended Basic Silviculture Cost Estimate as detailed in this chapter.

4.1 Cost Estimates

Cost estimates have been determined from a comprehensive survey of operations associated with logging on the coast. The survey includes both employee and contractor operations.

The survey collects experienced costs to the licensee from both company and contract operations: including wages, benefits, overtime, depreciation, fuel, supplies, repair and maintenance, moving assistance, freight, applicable licences, insurance, etc. from a representative sample of coast operations. Contract costs, including contractor profit and risk margins, overhead, crew transportation, etc., are included.

The phase cost estimating formulas and tables in this manual have been derived from this cost survey.

Phase cost estimates are complete and reflect average conditions, operating practices, and phase accounting allocations experienced in the survey data. Because of this averaging, no additions to or subtraction's from these estimates to reflect site-specific conditions are permitted. The estimates have an effective cost base date of July 1, 1992.

Where feasible alternative methods exist for harvesting and transporting timber from the cutting authority to the point of appraisal, the alternative with the least total operating cost estimate is selected.

An appraisal assumes physically compatible individual operating phases.

Appraisal cost estimates exclude the cost of performing work that is carried out under the *Forest Act, Section 88*, or work for which funding is provided by any Crown agency, except as noted in Section 6.5. The cost estimates in this chapter are applicable to all cutting authorities unless superseded by the procedures outlined in Section 2.1.

Phase cost estimates for specified operations, helicopter logging operations and conventional logging are weighted according to the applicable net cruise volume for each system.

4.1.1 Specified Operations

In addition to the logging phases and systems that are covered by this manual, there are specified operations which require special cost estimates.

The following is a complete list of specified operations for which certain cost phase estimates are based on the information on hand rather than on the tables and formulas in this manual. Other manual phase cost estimates are combined with the specified operation cost estimate to determine the total operating cost.

<i>SPECIFIED OPERATIONS</i>	<i>AFFECTED PHASE</i>
A-frame Logging	Tree-to-Truck (S.4.4)
Skyline Logging	Tree-to Truck (S.4.4)
Blowdown Timber	Tree-to-Truck (S.4.4)
Selective Logging	Tree-to-Truck (S.4.4)
Commercial Thinning	Tree-to-Truck (S.4.4)
Balloon Logging	Tree-to-Truck (S.4.4)
Horse Logging	Tree-to-Truck (S.4.4)
Skidder Swinging	Log Transportation (S.4.5)
Railway Transportation	Log Transportation (S.4.5)
Lake Transportation	Log Transportation (S.4.5)
Towing to Tie-up Grounds over 10 km Distance	Log Transportation (S.4.5)
Camp Moves of greater than 10 km	Administration and Other Costs (S.4.6) except Helicopter Logging
Destumping for root disease control	Administration and Other Costs (S.4.6)

The specified operations phase costs are monitored and updated by the Regional Manager and are not part of the annual cost collection and analysis process.

4.2 Appraisal Data Requirements

The cruise and all other pertinent information required for the appraisal must be submitted with the appropriate **COAST APPRAISAL DATA SHEET**.

Unless otherwise specified by the Director, Valuation Branch, cruise data must be gathered and compiled according to the approved utilization specifications and in accordance with the following Ministry of Forests Publications:

- *Forest Service Cruising Procedures & Cruise Compilation* (Cruising Manual)
- *Cruise Compilation Program - Documentation Manual*
- *Cruise Compilation System - Change Specification Detailed Requirements & Design*
- *Cruise Compilation Loss Factor Table Manual*
- *Regional publications* (e.g. Operational Cruising Requirements in the Vancouver and Prince Rupert Forest Regions)

In order to verify the accuracy of the cruise compilation program, the licensee must provide on request, photocopies of the tallysheets and a magnetic copy of the compilation in a format prescribed by the Regional Manager.

The appraisal uses the net cruise close utilization volume of timber per hectare. The net cruise volume (m^3) is the gross volume (m^3) less decay, waste and breakage for all of the species listed in section 3.3. The cutting authority total net cruise volume is determined by multiplying the net cruise volume per hectare (m^3/ha) by the total merchantable timbered area (ha) to be harvested in the cutting authority. The total merchantable timbered area is determined from the cruise summary if available.

If the application for a cutting authority is subsequently modified, the cruise submission must be recompiled by the applicant when more than five percent of the total number of compiled plots used in the cruise submission lie outside the boundaries established for the initial appraisal of the cutting authority.

Each reappraisal uses the net cruise volume by species determined by adjusting the original cruise volume on the basis of approved amendments since the last appraisal.

Plots located in areas requiring helicopter logging or specified operations are excluded from the cruise compilations used in the determination of conventional logging tree-to-truck variables.

4.3 Development

Development costs are estimated for each of three categories:

These are new construction, reconstruction and replacement, and deactivation.

Costs may not be recognized if the licensee has been negligent or has not followed approved plans or standards.

A unit cost (\$/m³) is calculated for each category (Section 4.3.1 and Section 4.3.1.1) and these unit costs are totalled to give a unit development cost estimate (\$/m³).

In order to calculate the unit costs (\$/m³) by category, the applicable volume will be the total net cruise volume (as defined in Section 4.2) or the remaining volume.

The costs for development works may only be allocated to tributary cutting authorities. A cutting authority is considered to be tributary if:

- i) timber from the cutting authority is appraised over the development works in question, or
- ii) the development works occur on a Main Service Road. A Main Service Road is defined as a main access road to the operation, necessary to maintain and supply the day-to-day harvesting activities of the cutting authority being appraised. To qualify the road must be used on a daily basis for the transport of bulk fuels, supplies, equipment and harvesting crews.

Two methods of estimating development costs are used in the appraisal system:

- a) **Tabular cost estimates** are made for new construction of roads and drainage structures using the applicable tables and formulas in Section 4.3.2 of this manual. Tabular estimates are used for an appraisal when physical dimensions and conditions fall within the tabular limitations.

- b) **Detailed engineering cost estimates** are made when the physical dimensions and conditions of a road section or a drainage structure exceed the tabular limitations of the manual. If a tabular estimate cannot be made due to table limitations then a detailed engineering estimate is made according to Section 4.3.3. Projects eligible for this costing method are listed by category in Section 4.3.1. Other projects approved by the Regional Manager also qualify.

Throughout Section 4.3 the term "roads" is meant to include both roads, and drainage and other pertinent structures.

4.3.1 Development Cost Categories

Development cost allocation (Section 4.3.1.1.) applies to all cost estimates made under this section.

1. New Construction

New construction is defined as the following construction phases: subgrade construction, placement of additional stabilizing material, construction and installation of drainage and other pertinent structures.

New construction costs are allocated to the first tributary cutting authority.

a) Road Cost Estimates

i) Tabular cost estimates

Each road section cost estimate is determined from the appropriate tables (section 4.3.2.1). These section costs are totalled to give a road cost estimate for each road. For each road the total approved cost estimate is divided by the total net cruise volume to give a unit cost (\$/m³). The unit costs (\$/m³) for all roads are then totalled to give a unit cost (\$/m³) for tabular roads.

ii) Detailed engineering cost estimates

Each project cost is estimated according to Section 4.3.3. These projects may include:

- Main access roads as defined in the "Ministry of Forests Main Access Roads Policy";
- Roads traversing private land;
- Road construction on side slopes that are over 150%;
- Road construction on terrain with 2 or more gullies over 10 metres deep at centreline in a 300 metre section;
- End haul construction requiring removal of all excavated material to a spoil area;
- Overland construction to provide a roadbed by trucking in material for extensive fill sections;
- Switchbacks with over 10,000 m³ excavation volume to complete the designed grade percent and horizontal alignment.

The total of the estimated costs for each project is divided by the total net cruise volume to give a unit cost (\$/m³) for engineered roads.

b) Bridge Cost Estimates

Each bridge cost estimate is determined either from the appropriate table (Section 4.3.2.2) or as a detailed engineering cost estimate (Section 4.3.3.). Projects eligible for detailed engineering estimates include:

- Bridges with over 5.4 metre average crib height or 20.4 metres span length;
- Bridges using other than log stringers;
- Pipe culverts greater than 900 mm in diameter, when specified in the cutting authority.

The total of the estimated costs for all bridges is divided by the total net cruise volume to give a unit cost (\$/m³) for bridges.

The unit costs (\$/m³) for tabular roads, engineered roads, and bridges are totalled to give a unit cost (\$/m³) for new construction.

2. Reconstruction and Replacement

Reconstruction and Replacement are defined as replacement or repair of a major drainage structure, or major reconstruction or resurfacing of a section of road, required because of:

- extensive "wear and tear", or
- the road has been permanently deactivated previously, or
- the road has been abandoned, or
- a water or slope failure "event".

A water or slope failure "event" is the result of an irregular natural occurrence which leads to the blockage or destruction of a road or bridge making the road or bridge impassable for vehicular traffic. The repair required should be grouped, if linked by event, into one project cost estimate (see Appendix II) via a detailed engineering cost form.

The costs approved under Section 4.3.1.2 must not qualify under routine maintenance as described in Section 4.5.3 or be eligible for reporting under the routine maintenance portion of the coastal logging cost survey.

The cost estimate may be allocated, by the licensee, to any individual tributary cutting authority that is in the licensees' approved five-year development plan. However, the licensee must identify this cutting authority as part of the detailed engineering cost estimate.

Reconstruction and replacement cost estimates will be determined on an individual project basis as detailed engineering cost estimates (Section 4.3.3) and must be approved by the District Manager.

These projects may include:

- Bridge structural maintenance including redecking (ties and decking) or replacement of a major drainage structure;
- Reconstruction of a road;
- Resurfacing of a road, with a minimum loose depth of 0.1 m. over a continuous length of 0.5 km or greater;
- Replacing pipe culverts larger than 900 mm in diameter.

Where bridge materials are re-used, at the second and subsequent locations, the cost estimate will include dismantling, transport and installation at the new site, but will exclude initial materials purchased and initial delivery costs of same.

To determine the unit cost (\$/m³) for reconstruction and replacement, the total approved costs are divided by the total net cruise volume at initial appraisal or the remaining volume at reappraisal.

3. Deactivation

Deactivation sites include roads, bridges, logging campsites, dryland sorts and log dumps. Deactivation is defined in the Forest Road and Logging Trail Engineering Practices (Interim) and segregated into three levels as follows (see Part C of Engineering Practices):

1. temporary (seasonal)
2. semi-permanent (rotation maintenance)
3. permanent

For appraisal purposes, temporary deactivation is recognized in the routine maintenance phase. The semi-permanent and permanent deactivation cost estimates will be calculated as detailed engineering cost estimates (Section 4.3.3).

Only specific projects required in a cutting authority document will be considered in appraisals. These projects do not include those designed exclusively for silvicultural purposes. The cost estimate may be allocated by the licensee, to any individual tributary cutting authority that is in the licensee's approved five-year development plan. However, the licensee must identify this cutting authority as part of the detailed engineering cost estimate.

To determine the unit cost (\$/m³) for deactivation, the total approved costs are divided by the total net cruise volume of the cutting authority at initial appraisal or the remaining volume when new projects and costs are added at reappraisal.

4.3.1.1 Development Cost Allocation

Where proration is required for Section 4.3.1.1 part 1 & 2:

$$\text{Crown share} = \text{Total Estimated Cost} * \frac{\text{Stumpage Bearing Timber Volume}}{\text{Total Timber Volume}}$$

Where:

Crown share (\$) = dollar amount to be allocated to stumpage-bearing timber in the cutting authority being appraised.

Total Cost Estimate (\$) = dollar amount of the total development cost estimate.

Stumpage Bearing Timber= volume of stumpage-bearing timber tributary to
Volume (m³) the project and under the control of the licensee or a company legally associated with the licensee, including volume in all areas contributing to the allowable annual cut determination.

Total Timber Volume (m³) = total volume tributary to the project and under the control of the licensee or a company associated with the licensee.

In all cases, volumes are estimated from the latest approved operational or inventory cruise data and maps of the area within the drainage to the height of land. Once the allocation percent of a development cost estimate is determined, it is not revised at subsequent reappraisals.

The Crown share is a dollar amount which is included in the appraisal of a tributary cutting authority, subject to Section 4.3.1.1, Subsection 5.

Development cost estimate is allocated according to the outline below (See Also Appendix III):

1. Development cost estimates in stumpage-bearing timber on Crown lands.

- i) Development providing access to stumpage bearing timber only.
Total estimated costs by tabular or detailed engineering methods are included in the appraisal.
- ii) Development providing access to non-stumpage-bearing timber only.
Cost estimates are not included in the appraisal.
- iii) Development in stumpage bearing timber areas providing access to both stumpage-bearing and non-stumpage-bearing timber (e.g. Timber Licence) held by the Licensee or a company legally associated with the licensee.
 - a) Costs that can be estimated by the tabular method are fully included in the appraisal.
 - b) Costs that can only be estimated by the detailed engineering method are prorated between stumpage-bearing and non-stumpage-bearing timber, and then included in the appraisal.

2. Development cost estimates in non-stumpage-bearing timber on Crown lands (i.e. Timber Licences).

- i) Development providing access to stumpage-bearing timber only.
 - a) Non-stumpage-bearing timber area held by licensee or a company legally associated with licensee.
 - Costs that can be estimated by the tabular method are not included in the appraisal.
 - Costs that can only be estimated by the detailed engineering method are prorated between stumpage-bearing and non-stumpage-bearing timber and then included in the appraisal.

- b) Non-stumpage-bearing timber area held by a legally non-associated third party.
 - Costs estimated by the tabular and detailed engineering methods are included in the appraisal.
- ii) Development providing access to non-stumpage bearing timber only.
 - a) Non-stumpage-bearing timber area held by licensee or a company legally associated with licensee.
 - Cost estimates are not included in appraisals.
 - b) Non-stumpage-bearing timber area held by a non-associated third party.
 - Costs are not included in appraisals.
- iii) Development providing access to both stumpage-bearing and non-stumpage-bearing timber.
 - a) Non-stumpage-bearing timber area held by licensee or a company legally associated with licensee.
 - Costs that can be estimated by the tabular method are not included in the appraisal.
 - Costs that can only be estimated by the detailed engineering method are prorated between stumpage-bearing and non-stumpage-bearing timber and then included in the appraisal.
 - b) Non-stumpage-bearing timber area held by a legally non-associated third party.
 - Costs estimated by the tabular method and the detailed engineering methods are included in the appraisal.

3. Development Costs on Private Land

A part of a new or reconstructed road may lie on private land and may have a reasonable probability of being required on a major or long term basis for either timber extraction, future management of Crown forest land and/or present or future public use. In order to be considered in stumpage appraisal cost estimates, the right-of-way ownership must first be transferred to the Crown, except as stated below.

When a road on private land is required for only short term timber extraction, the estimated cost of the road is included in the appraisal according to the procedures of Sections 4.3.1.1 and 4.5.4.

4. Existing Roads and Structures

- a) The costs of previously constructed roads that have been considered in appraisals of stumpage-bearing timber, roads constructed to develop non-stumpage bearing timber and roads constructed all or in part for purposes unrelated to logging the cutting authority being appraised, are defined to be "existing roads" and are not eligible for inclusion in development cost estimates. If the "existing road" requires reconstruction or permanent deactivation, the cost estimate is made as described in Section 4.3.1. If the "existing road" is on private land, road and land use charges may be recognized as described in Section 4.5.4.
- b) "Rollover". A term used to describe the method of dealing with appraisal information for timber left unlogged when one TFL cutting authority term expires and is included in the appraisal of a new TFL cutting authority.

For the purpose of estimating the development cost of the new cutting authority, a percentage of the development cost estimate for the uncut or partly cut rollover blocks is added to the development cost estimates for the new blocks.

For tabular cost estimates this percentage is determined for each rollover block based on the remaining volume that will be rolled over divided by the original volume estimated for the block.

For detailed engineering cost estimates, the rollover percentage is determined by dividing the remaining cutting authority volume by the total volume of the cutting authority in the last appraisal or reappraisal.

The volumes remaining in rollover blocks are carried ahead and not recompiled with the new cutting authority.

5. Extended Road Amortization

Where the New Construction cost estimate exceeds \$7.00/m³, a written agreement may be made which apportions the main access road cost estimate to two or more tributary cutting authorities. The main access road ends at the far boundary of the first cutting authority being appraised.

The agreement is subject to the following conditions:

- a) Only main access roads serving the tributary cutting authorities (as defined in Sec. 4.3) may be considered. The roads must be on Crown land.
- b) Each cutting authority must be in the licensee's approved five year development plan.
- c) The agreement must be signed by the licensee and the licensor.
- d) The amount apportioned will be a fixed lump sum which will be trended as provided for in Section 4.9 but not otherwise revisited.
- e) The term of the agreement must not exceed the terms of the cutting authorities.
- f) The agreement will only be valid under CVP and confers no obligation on the Crown to compensate licensees for any unamortized costs.

4.3.2 Tabular Cost Estimates

Tabular road cost estimates are based on average logging road construction practices, generally single lane width roads with turnouts and landings. These roads may or may not require placement of additional stabilizing materials.

Weighted averages for each variable (uphill side slope, rock, etc.) are applied to each road section. Averages are obtained by weighting the cross-section measurements taken at representative points along the road by the applicable road section length. The length of bridges occurring in the section is excluded.

4.3.2.1 Subgrade Construction

The estimated cost per kilometre for subgrade construction is provided for each combination of Construction Category and uphill side-slope for two Rock Mass Classification categories, "RMC 5 Only" and "Other RMC's".

- A. *Construction Category* (CC) is determined on the basis of the percent rock in relation to the total volume of all materials.

The percent rock is determined as follows:

$$\% \text{ rock} = \frac{h^2}{H^2} * 100\%$$

Where:

h = the vertical cut height of all rock measured from the bottom of the ditch

H = the total vertical cut height of all materials including organic layers, glacial till and hardpan measured from the bottom of the ditch

Construction Category may show a range of variation ($\pm$ one CC) within any section length, and is recorded to the nearest integer. Hardpan is CC1, whether drilled and blasted or not. Rippable rock and boulders may occur in CC2 to CC6

The following table defines the Construction Categories.

CONSTRUCTION CATEGORIES

Construction Category	1	2	3	4	5	6
% rock	0	1-12	13-37	38-62	63-87	88+

- B. *Rock Mass Classification* (RMC) is based on the physical characteristics of rock encountered in forest road development and is the subject of a report commissioned by the Forest Engineering Research Institute of Canada in 1978 and prepared by Piteau & Associates/Geotechnical Consultants.

Rock can be classified into five types referred to as Rock Mass Classification (RMC) values and identified as RMC 1, 2, 3, 4, 5.

The steps taken to determine RMC values and apply these to road development cost estimates are:

- a) Examine and record surface hardness, weathering, and block diameter in the field;
- b) Determine subsurface hardness from the table in Appendix IV with this title;
- c) Determine RMC value from the table Appendix IV with this title; and,
- d) Apply selected RMC values to applicable tables and formulas for road cost estimates.

The text and tables in Appendix IV have been derived from the report prepared by Piteau & Associates. These tables are used to determine the RMC-based factors required for road cost estimates.

In all circumstances where a complete interpretation of the Rock Mass Classification system is required, the Piteau & Associates report is to be consulted directly.

- C. *Subgrade cost estimates* are determined as follows:

1. All section lengths must be 0.3 km or longer, with the exception of short spurs and those sections which do not qualify under (2). Lengths are recorded to the nearest .01 km.

2. In general *each section* should consist of a length of road wherein:
 - a) variations in slope % measurement are within $\pm 15\%$ of the average slope measured in the section. The uphill slope percent is measured at right angles to the road centreline, parallel to the ground of the uphill slope and recorded to the nearest percent. Where the road is located on a bench, the slope of the bench is used.
 - b) construction categories vary by no more than ± 1 construction category about the average construction category in the section.
 - c) one rock mass class predominates.
 - d) all stabilizing material is trucked or no stabilizing material is trucked.
 - e) stabilizing material is either all gravel or all rock.
3. All sections with 60% or more (by length) of RMC 5 are designated as "hard".
4. If the total length of all "hard" sections is greater than 90% of the total length of sections containing rock (i.e. CC 2-6), then the cost table for RMC 5 Only is applied to all roads in the appraisal.
5. If the roads do not qualify under 3. and 4. above, then the subgrade construction cost estimate table for Other RMC's is applied to all roads in the appraisal.

The subgrade construction cost estimate includes clearing and grubbing, stripping, stump removal, incidental log decking, ditch construction, landing and turnout construction, material costs and installation of pipe culverts (with diameters up to and including 900 mm) and single log abutment culverts with spans less than 3.5 m. Right-of-way felling and loading is excluded from the road construction phase but included in the tree-to-truck phase.

SUBGRADE CONSTRUCTION COST ESTIMATE
(Thousands of Dollars per Kilometre)

a) RMC 5 ONLY

Uphill Side Slope %	Construction Category					
	1	2	3	4	5	6
0-4	28.0	35.1	54.1	75.2	93.7	106.4
5-14	29.0	36.7	56.8	78.9	98.1	111.4
15-24	30.2	38.5	60.1	83.3	103.4	117.2
25-34	31.3	40.3	63.1	87.5	108.4	122.8
35-44	32.4	41.9	66.1	91.5	113.2	128.1
45-54	33.3	43.4	68.8	95.3	117.8	133.2
55-64	34.1	44.9	71.5	98.9	122.2	138.1
65-74	34.9	46.3	74.1	102.4	126.4	142.8
75-84	35.6	47.6	76.5	105.8	130.5	147.4
85-94	36.3	48.9	78.9	109.0	134.4	151.8
95-104	36.9	50.1	81.2	112.2	138.2	156.1
105-114	37.5	51.3	83.4	115.2	141.9	160.2
115-124	38.1	52.5	85.5	118.1	145.5	164.3
125-134	38.6	53.5	87.6	121.0	149.0	168.2
135-144	39.1	54.6	89.6	123.8	152.5	172.1
145-150	39.5	55.6	91.5	126.5	155.8	175.9

b) OTHER RMC's

Uphill Side Slope %	Construction Category					
	1	2	3	4	5	6
0-4	28.0	33.4	48.1	64.8	79.6	90.0
5-14	29.0	34.8	50.3	67.7	83.1	93.9
15-24	30.2	36.5	53.0	71.2	87.3	98.5
25-34	31.3	38.0	55.5	74.6	91.3	102.9
35-44	32.4	39.5	57.9	77.7	95.0	107.1
45-54	33.3	40.8	60.1	80.7	98.6	111.1
55-64	34.1	42.1	62.3	83.6	102.1	114.9
65-74	34.9	43.3	64.3	86.3	105.4	118.6
75-84	35.6	44.5	66.3	89.0	108.6	122.1
85-94	36.3	45.6	68.2	91.5	111.6	125.6
95-104	36.9	46.6	70.0	94.0	114.6	128.9
105-114	37.5	47.7	71.7	96.4	117.5	132.2
115-124	38.1	48.6	73.4	98.7	120.3	135.3
125-134	38.6	49.5	75.1	100.9	123.0	138.4
135-144	39.1	50.4	76.6	103.1	125.7	141.4
145-150	39.5	51.3	78.2	105.2	128.3	144.3

4.3.2.2 Drainage Structures

Cost estimates are made for bridges where their necessity is substantiated by field data.

All pipe culverts up to and including 900 mm diameter and all single log abutment culverts up to 3.4 m span length are included in the subgrade cost estimates.

Cost estimates for log bridges are based on span lengths (distance between the centres of the top sill logs) and average crib height (distance from the bottom of the bottom sill log to the point where the stringer rests on the top sill log as measured along the centre line of the bridge) from the table that follows. The average crib height is the numerical average of the crib heights on both banks of the water course.

The table that follows is used for estimating costs of all timber-decked and gravel surfaced log bridges with span lengths from 3.5 to 20.4 metres and crib heights from single log to 5.4 metres.

Crib back-fills and all site preparation and protection features such as rip rap are included, as well as material supply and erection. No adjustment of table values is permitted.

Input data within table boundaries is rounded to fit; no interpolation of values is permitted.

Cost estimates for bridge sizes outside the table limits and pipe culverts greater than the aforementioned sizes require detailed engineering data as shown in section 4.3.3.

BRIDGE COST ESTIMATE
(Thousands of Dollars)

Span Length (metres)	Single Log Sill	Multi-Log Crib Average Crib Height (metres)				
		1	2	3	4	5
4	1.8	3.4	8.5	16.6	29.6	
5	1.8	4.8	9.8	17.9	30.9	
6	2.9	6.1	11.1	19.2	32.2	
7	4.3	7.4	12.4	20.5	33.5	
8	5.6	8.7	13.7	21.8	34.9	
9	6.9	10.0	15.0	23.1	36.2	
10	8.2	11.3	16.3	24.4	37.5	
11	9.5	12.6	17.7	25.8	38.8	
12	10.8	13.9	19.0	27.1	40.1	
13	12.1	15.3	20.3	28.4	41.4	
14	13.4	16.6	21.6	29.7	42.7	
15	14.8	17.9	22.9	31.0	44.0	
16	16.1	19.2	24.2	32.3	45.3	
17	17.4	20.5	25.5	33.6	46.7	
18	18.7	21.8	26.8	34.9	48.0	
19	20.0	23.1	28.2	36.2	49.3	
20	21.3	24.4	29.5	37.6	50.6	

4.3.2.3 Additional Stabilizing Material

Stabilizing material is gravel or broken rock which is placed on the road subgrade to provide stable support and a running surface for logging related equipment using the road. Some stabilizing material may be developed in place during subgrade construction. If additional stabilizing material is required it may be obtained from the adjacent cut-bank or trucked in.

1. *Quantity*

The volume of rock or gravel in cubic metres required to stabilize one kilometre of roadbed is as follows:

$VR = 1000D (W + 1.0D)$, using rock

$VG = 1000D (W + 1.5D)$, using gravel

Where:

- V is loose volume (VR or VG) of stabilizing material,
- W is stabilized road width in metres = 6.2 (includes turn outs and landings),
- D is loose depth of stabilizing material in metres determined from the following table:

**ADDITIONAL LOOSE STABILIZING MATERIAL DEPTHS
(METRES)**

Side Slope	Construction Category					
	1	2	3	4	5	6
0-4	0.8	0.8	0.7	0.6	0.6	0.5
5-14	0.7	0.7	0.7	0.6	0.5	0.4
15-24	0.7	0.6	0.6	0.5	0.4	0.4
25-34	0.6	0.6	0.5	0.4	0.3	0.3
35-44	0.5	0.5	0.4	0.3	0.3	0.2
45-54	0.4	0.4	0.3	0.3	0.2	0.1
55-64	0.3	0.3	0.3	0.2	0.1	0.0
65-74	0.2	0.2	0.2	0.1	0.0	0.0
75-84	0.2	0.1	0.1	0.0	0.0	0.0
85-94	0.1	0.1	0.0	0.0	0.0	0.0
95-104	0.0	0.0	0.0	0.0	0.0	0.0
105-114	0.0	0.0	0.0	0.0	0.0	0.0
115+	0.0	0.0	0.0	0.0	0.0	0.0

The factors of 1.0 and 1.5 relate to the slope of the fill material. More gravel than rock is required to stabilize a given kilometre of road

(i.e. 1 ½:1 fill slopes for gravel and 1:1 fill slopes for rock).

The quantities per kilometre and the depths by construction categories are only used in conjunction with tabular cost estimates.

2. *In-place Unit Cost Estimates*

The in-place unit cost estimates (\$/m³) for the additional stabilizing materials include:

- borrow pit preparation
- rock drilling, explosives, loading of explosives and blasting (e.g. compacted or cemented gravel, oversize material, etc.)
- loading gravel trucks when truck haul required, or placement of materials when trucking is not required
- truck hauling, when required
- spreading and compacting material

The cost estimates assume borrow pits are located adjacent to a road right-of-way. If a new road needs to be constructed to access the borrow pit, then the access road cost estimates are required in addition to the in-place unit cost estimates.

The in-place unit cost estimates are based on two possibilities which are:

a) *No trucking of stabilizing material*

When a borrow pit is located adjacent to the subgrade to be stabilized and material is to be moved less than 0.1 km, no trucking of stabilizing material is assumed. The in place unit cost estimates (U) are:

Gravel	U (\$/m ³) = 5.00
Soft and Medium Rock	U (\$/m ³) = 7.46
Hard Rock	U (\$/m ³) = 9.71

Definition - m³ = cubic meters of stabilizing material

b) *Trucking of stabilizing material*

When suitable ballast must be moved a distance of 0.1 km or further, trucking of stabilizing materials is assumed. The in-place unit cost estimates (U) are:

Gravel	$U (\$/m^3) = 6.72 + 0.508 (d)$
Soft and Medium Rock	$U (\$/m^3) = 9.18 + 0.508 (d)$
Hard Rock	$U (\$/m^3) = 11.43 + 0.508 (d)$

Where: d is the assumed trucking distance forward from the source to the mid-point of the road section to be stabilized. The minimum value of d = 0.1 km.

Definitions for In-Place & Quarry rock RMC (hardness):

- "Soft-Medium" - less than 60% of the rock from the excavation is RMC 5.
 "Hard Rock" - 60% or more of the rock from the excavation is RMC 5.

3. *Stabilizing Cost Estimate*

The total cost estimate per kilometre for the in-place stabilizing material is:

$$\text{Cost Estimate (\$/km)} = V * U$$

Where:

- V is required loose volume of additional stabilizing material in cubic metres per kilometre
- U is in-place unit cost estimate for additional stabilizing material in dollars per loose cubic metre.

4. *Capping*

Where the available material consists of large round or broken rock or "dirty" or fine gravel which is unsuitable for normal traffic conditions, the appraisal may include a cost estimate for "capping" of 0.1 metres (loose depth) of suitable rock or gravel surfacing on road sections where required and providing the application is substantiated. This material is normally trucked in from a different borrow pit than the source of the stabilizing material.

4.3.3 Detailed Engineering Cost Estimates

Where the tabular cost estimating procedures of this manual cannot be used due to their physical limitations, the cost of a project is estimated by preparing a detailed engineering cost estimate. The Regional Manager may approve a standardized cost estimate for use on the following projects:

- a) End Hauling,
- b) Road Reconstruction and Replacement,
- c) Bridge Structural Repair,
- d) Semi-Permanent and Permanent Deactivation.

When development projects require detailed engineering estimates, the District Manager shall be advised by the licensee of project details no less than 60 days prior to the commencement of construction.

This notice is required to facilitate a current cost review of the project for later consideration in an appraisal.

In addition to the prior-to-construction requirement stated above, all cost data required for appraisals must be submitted according to the lead-time requirements of Section 2.2a.

When an emergency situation arises where the 60 day advance notice to the District Manager is not possible then verbal notification must be made at the earliest opportunity.

For appraisal purposes, the project costs are estimated using site specific data (as defined in Section 4.3.3.1) and the equipment and labour rates as specified in Appendix I. Where the equipment required is not recognized in Appendix 1 then the equipment rate can be attained from the "Province of British Columbia Equipment Rental Rate Guide for 1991-92-93". All equipment rates are assumed to be for a 3 year old machine using the July 1, 1992 cost base. Some projects will be completed on the basis of arms length competitive bids and may be accepted for costs at the Regional Managers discretion.

4.3.3.1 Data Requirements

All detailed engineering design is based on minimizing quantities.

A. The data that may be required for "excavation and fill" cost estimates are:

- Plans, profiles, cross-sections showing the ground and design grade lines;
- Volume summary sheets giving quantities by various soil types;
- Type of construction equipment to be used;
- A cost estimate for the project.

- B. The data that may be required for reconstruction and replacement, and deactivation cost estimates are:
- A map showing details of the project including stations, drainage's, and other information important to the project;
 - Time and materials, equipment and labour, estimate for excavation, repairs, drainage structures, re-ditching, and resurfacing where required;
 - A cost estimate for the project.
- C. The information and data that may be required for bridge and culvert construction cost estimates are:
- For permanent structures of 20.4 metres span or greater: plans, specifications and design for the proposed structure, detailed materials cost estimate, equipment and labour, amount of timber accessed by the structure, and usage in years for harvesting all the timber;
 - For permanent structures of 20.4 metres span or less: an economic comparison between a log structure and the permanent structure, and the same information as required for permanent structures of 20.4 metres span or greater;
 - For pipe culverts greater than 900 mm in diameter: the same information as required for permanent structures of 20.4 metres span or greater.

4.4 Tree To Truck

The cost estimate for the tree-to-truck phase includes falling, bucking, skidding/yarding, and loading.

All pertinent labour and equipment costs are accounted for. The costs include time lost by fallers due to adverse weather conditions, contractual requirements for falling non-merchantable trees, streambank-management yarding, right-of-way logging, and construction of back spar trails, or rigging of back spars, or cost of the mobile back spar unit.

The variable used to determine the conventional logging tree-to-truck phase is:

Slope (S%): the average side slope on the conventional logging areas being appraised, rounded to the nearest whole percentage point. The average side slope is derived as an unweighted average of the maximum side slopes on all cruise plots situated within the cutting authority, excluding those plots noted in Section 4.2.

4.4.1 Conventional Logging

Conventional logging means all logging methods other than helicopter logging and those specified operations listed in Section 4.1.1.

The cost estimate formula for the tree-to-truck (TTT) phase for both isolated and accessible cutting authorities is:

$$(\$/\text{m}^3) = 13.6803 + 0.0374 (S)$$

Where: S is the average side slope in %.

4.4.2 Helicopter Logging

No variables are recognized for this system. The cost estimates given below are applied to the net cruise volume that requires helicopter yarding.

Two variations of helicopter logging are recognized:

a) *Water Drop Operations*

Water drop operations occur where logs are carried by helicopter to the water. This phase cost estimate includes felling and bucking, helicopter yarding, chasing, bag booming and towing to sorting area or local tie up grounds, total crew transportation and short and long distance mobilization of helicopter logging operation (e.g. camp, shop, equipment, parts, fuel, etc.).

The cost estimate for the above phase is \$50.08/m³ for all water drop operations.

In addition, the following phases, when applicable, are estimated as detailed elsewhere in this manual:

- Truck Hauling (Section 4.5.1)
- Dump, Sort, Boom and Scale (Section 4.5.2.1)
- Towing or Barging (Section 4.5.2.2)
- Routine Maintenance (Section 4.5.3)
- Road and Land Use Charges (Section 4.5.4)
- Specified Operations (Section 4.1.1)
- Overhead (Section 4.6.1)
- Accommodation (Section 4.6.3)

A cost estimate for the Woods Run phase (Section 4.6.2) is not applicable

b) *Land Drop*

Land drop operations occur where logs are carried by helicopter to land, rehandled on land, and hauled by logging truck. This phase cost estimate includes "Tree-to-Truck" using helicopter, total crew transportation, landing construction, and short and long distance mobilization of a helicopter logging operation (e.g. shop, equipment, parts, fuel, etc.).

The cost estimate for the above phase is \$54.02/m³ for all land drop operations.

In addition, the following phases, when applicable, are estimated as detailed elsewhere in this manual:

- Development (Section 4.3)
- Truck Hauling (Section 4.5.1)
- Dump, Sort, Boom and Scale (Section 4.5.2.1)
- Towing or Barging (Section 4.5.2.2)
- Routine Maintenance (Section 4.5.3)
- Road and Land Use Charges (Section 4.5.4)
- Specified Operations (Section 4.1.1)
- Overhead (Section 4.6.1)
- Accommodation (Section 4.6.3)

A cost estimate for the Woods Run phase (Section 4.6.2) is not applicable.

4.5 Log Transportation

4.5.1 Truck Hauling

The truck hauling phase cost estimate is for the movement of logs from the roadside or landing in the woods to the appraisal final off-loading destination selected for the cutting authority. This cost estimate includes all rehaul situations except those involving lake transportation. Both on-highway and off-highway hauling are calculated with the same formula and variable.

- a) *Distance*: The variable used to determine the truck hauling phase cost estimate is distance (km). This is the weighted average one-way haul distance from the centre of the cutting authority to the appraisal log dump where trucks are off-loaded. The weighted average haul distance (D) is estimated by:
- i) establishing the geographical centre point of each block or cutting area and projecting this point to the nearest road for measurement purposes,
 - ii) from this point determining the haul distance to the nearest junction serving all blocks or cutting areas,
 - iii) weighting the distance for each block by the volume on the block and determining the average weighted distance to the junction,
 - iv) measuring the haul distance from the junction to the final appraised place of unloading and adding this to the average weighted distance to the junction as outlined above.
- b) *Formula*: Where truck hauling is required, the cost estimate formula for the truck hauling phase for both isolated and accessible operations is:

$$(\$/\text{m}^3) = 3.5123 + 0.0611 (D)$$

Where: D is the weighted average one-way haul distance in kilometres, rounded to the nearest 0.1.

When: D = 0, then the truck hauling cost estimate is equal to zero.

4.5.2 Water Transportation

This phase covers all operating cost elements from the local tie-up ground to the point of appraisal. The point of appraisal policy in Section 2.5 governs the determination of the cost estimates.

4.5.2.1 Dump, Sort, Boom and Scale

Cost estimates for this phase are based on two log transportation systems:

- towing logs
- barging logs

Barge transportation is recognized where part of the route from local tie-up grounds at the appraised point of origin to point of appraisal is exposed to the open ocean swell.

Only points on the West Coast of Vancouver Island north of Port Renfrew, (except those routes totally east of a line drawn from Cape Beale to Amphitrite Point, including Ucluelet Harbour), and all points north of Cape Caution on the mainland are considered to require barge transportation.

Where barge transportation is not recognized, towing of sorted logs or camp-run logs from the local tie-up ground at the appraised point of origin to point of appraisal is assumed.

All on-site and central sort costs related to dump, sort, boom, scale and re-load from dryland sorts where required, are included for the system as follows. Local towing of up to 10 km is also included.

<u>Condition</u>	Cost Estimate for all <u>Operations</u>
Towing	\$5.60/m ³
Barging	\$7.55/m ³

Also applied when neither towing nor barging is required (i.e. when point of origin and point of appraisal are the same location).

4.5.2.2 Towing or Barging

The following tables list the towing and barging cost estimates from specific points of origin. For unlisted points of origin the cost estimates from two adjacent points of origin may be averaged.

TOWING COST ESTIMATES

Code	Point of Origin	P/A	\$/m ³	Code	Point of Origin	P/A	\$/m ³
ALBE	ALBERNI	A	0.00	BUIM	M. OF BUTE INLET	G	1.75
CHCK	CHINA CREEK	A	0.61	KIIM	M. OF KINGCOME INLET	G	2.92
COCK	COLEMAN CREEK	A	0.71	KNIM	M. OF KNIGHT INLET	G	3.16
MTCK	MacTUSH CREEK	A	0.63	LOUM	M. OF LOUGHBOROUGH	G	2.00
SARV	SARITA RIVER	A	0.87	TOIM	M. OF TOBA INLET	G	1.77
SPCK	SPENCER CREEK	A	0.75	NACK	NAKA CREEK	G	2.42
TOBY	TOQUART BAY	A	1.03	NOBY	NORTHWEST BAY	G	1.09
UCHU	UCHUCKLESIT	A	0.81	PHAR	PHILLIPS ARM	G	1.94
UCLU	UCLULET	A	1.11	PTEB	PORT ELIZABETH	G	2.60
CHEM	CHEMAINUS	C	0.00	PTHD	PORT HARDY	G	3.02
COBY	COWICHAN BAY	C	0.75	PTHV	PORT HARVEY	G	2.40
JORV	JORDAN RIVER	C	1.49	PTMN	PORT MCNEILL	G	2.76
LADY	LADYSMITH	C	0.63	PTNE	PORT NEVILLE	G	2.34
NANA	NANAIMO	C	0.77	PORV	POWELL RIVER	G	1.31
PTRE	PORT RENFREW	C	1.77	SENA	SECOND NARROWS	G	0.83
SOOK	SOOKE	C	1.39	SYIN	SEYMOUR INLET	G	4.91
VICT	VICTORIA	C	1.15	SEBY	SOUTHWEST BAY	G	2.30
AGAM	AGAMEMNON	G	1.07	SQUA	SQUAMISH	G	0.81
BECV	BEAVER COVE	G	2.67	STIL	STILLWATER	G	1.15
COUR	COURTENAY	G	1.47	TEAR	TEAKERNE ARM	G	1.61
DRIN	DRURY INLET	G	3.14	THIN	THEODOSIA INLET	G	1.61
EVRV	EVE RIVER	G	2.34	THSO	THOMPSON SOUND	G	2.74
FOHA	FORWARD HARBOUR	G	2.14	WASA	WAKEMAN SOUND	G	3.10
FRAR	FREDERICK ARM	G	1.87	GAMB	GAMBIER ISLAND	G	0.00
BUIH	HEAD OF BUTE INLET	G	2.22	HOAB	ABOVE HOPE BRIDGE	P	2.35
JEIH	H. OF JERVIS INLET	G	1.55	CHWK	CHILLIWACK	P	0.93
KIIH	H. OF KINGCOME INLET	G	3.16	HALF	FOOT HARRISON LAKE	P	2.05
KNIH	H. OF KNIGHT INLET	G	3.16	PILF	FOOT OF PITT LAKE	P	0.65
LOUH	H. OF LOUGHBOROUGH	G	2.20	HABY	HARRISON BAY	P	1.88
SEIH	H. OF SECHLT INLET	G	1.41	HATZ	HATZIC	P	0.83
TOIH	H. OF TOBA INLET	G	2.02	HALH	HEAD HARRISON LAKE	P	2.45
INAR	INDIAN ARM	G	0.99	PILH	HEAD OF PITT LAKE	P	0.81
KLBY	KELSEY BAY	G	2.18	HALM	MID HARRISON LAKE	P	2.27
MNCK	MCNAB CREEK	G	0.71	PIRV	PITT RIVER BRIDGE	P	0.00
MEBY	MENZIES BAY	G	2.02	SICK	SILVERHOPE CREEK	P	2.23
JEIM	MOUTH OF JERVIS INLET	G	1.11	WHON	WONNOCK	P	0.71

P/A = Point of Appraisal as follows:

- A = ALBE - ALBERNI - the head of Alberni Inlet;
- C = CHEM - CHEMAINUS - tie-up grounds in the vicinity of Chemainus representing the facilities from Nanaimo Harbour to Cowichan Bay;
- G = GAMB - GAMBIER ISLAND - representing all facilities in Howe Sound area;
- P = PIRV - PITT RIVER BRIDGE - representing the facilities along the Fraser River and Pitt River.

BARGING COST ESTIMATES

Code	Point of Origin	P/A	\$/m³	Code	Point of Origin	P/A	\$/m³
BACK	BARR CREEK	A	4.78	BOIN	BOSWELL INLET	G	5.96
BLBY	BLOWHOLE BAY	A	4.53	CAIS	/SECURITY BAY	G	6.65
CLCK	CLEAGH CREEK	A	5.48	DIBY	CAMPBELL ISLAND	G	10.07
COHA	COAL HARBOUR	A	5.65	ELHA	DINAN BAY	G	6.77
CYRV	CYPRE RIVER	A	4.00	FEBY	ELCHO HARBOUR	G	9.97
EAIN	EASY INLET	A	4.99	RIIH	FERGUSON BAY	G	6.21
ESIN	ESPINOSA INLET	A	4.80	SBEH	HEAD OF RIVERS INLET	G	7.18
GORV	GOLD RIVER	A	4.57		HEAD OF SOUTH	G	
HEBY	HEAD BAY	A	4.51	HNRV	BENTINCK	G	9.18
BESH	H. OF BEDWELL SOUND	A	4.09	KMBY	HONNA RIVER	G	8.40
HENO	HECATE CHANNEL-	A	4.54	KHIN	KEMANO BAY	G	9.37
	NOOTKA			KIMS	KHUTZEYMAATEEN INLET	G	7.26
HOLB	HOLBERG	A	5.86		KIMSQUIT	G	
HORV	HOUSTON RIVER	A	4.47	KLEM	KLEMTU	G	7.00
HUCK	HUSHAMU CREEK	A	5.73	KUIN	KUMEALON INLET	G	8.47
INGE	INGERSOLL	A	5.50	KWBY	KWATNA BAY/MINERVA	G	6.67
JELA	JEUNE LANDING	A	5.63	KWRV	KWINAMASS RIVER	G	9.33
KEIN	KENDRICK INLET	A	4.42	MCBY	MCCLINTON BAY	G	10.11
KOHA	KOPRINO HARBOUR	A	5.39	MOIN	MOSES INLET/INRIG BAY	G	6.23
KUCV	KULTUS COVE	A	5.54	NAHA	HADEN HARBOUR	G	9.84
MCKK	McCURDY CREEK	A	4.55	NABY	NASS BAY	G	9.54
MORV	MOOYAH RIVER	A	4.42	NORV	NOTUM RIVER	G	6.36
OUIN	OUOUKINSH INLET	A	5.06	OCFA	OCEAN FALLS	G	6.67
PLHA	PLUMPER HARBOUR	A	4.38	POIS	PORCHER ISLAND	G	8.70
PTL	PORT ELIZA	A	4.68	PRRU	PRINCE RUPERT	G	8.80
RACV	RANKIN COVE	A	4.19	RESO	RENNELL SOUND	G	9.23
STCV	STEAMER COVE	A	4.11	REPA	RENNERS PASSAGE	G	9.21
TLRV	TLUPANA RIVER	A	4.49	SCRV	SCOTIA RIVER *	G	9.35
TSRV	TSOWWIN RIVER	A	4.47	SWIN	SEWELL INLET	G	8.78
WIHA	WINTER HARBOUR	A	5.39	SKIN	SKIDEGATE INLET	G	9.16
ZEBA	ZEBALLOS	A	4.87	SOBY	SOUTH BAY	G	9.23
ALAR	ALICE ARM	G	9.94	STEW	STEWART	G	10.22
ALBY	ALLIFORD BAY	G	9.16	TASV	TASU SOUND	G	8.76
BEAN	BEATTIE ANCHORAGE	G	8.74	TUIN	TUCK INLET	G	8.89
BECO	BELLA COOLA	G	6.99	WECK	WEEWANIE CREEK	G	8.09
BIBY	BISHOP BAY	G	7.79	WOCH	WORK CHANNEL	G	9.37

Note: P/A = Point of Appraisal as defined on the previous page.

* Includes river towing.

4.5.3 Routine Maintenance

Routine maintenance includes grading, brush control, minor surfacing repairs, sanding, snowplowing, ditch maintenance and repair, replacement of culverts, slough removal and waterbar construction, for seasonal erosion control.

Routine maintenance also includes minor repairs to roads due to slides, erosion and flood damage. All road use charges except those recognized in Section 4.5.4 are also included.

The cost estimate for all routine maintenance carried out on logging operations, including roads required for basic silviculture and protection, depends on the geographic location of the cutting authority. Cost estimates do not apply where there are no roads to be maintained.

The cost estimates (by Forest District) are:

Zone 1 (North)

- Queen Charlotte
- North Coast
- Mid Coast
- Port McNeill

Cost Estimate = \$1.22/m³

Zone 2 (South)

- Sunshine Coast
- Squamish
- Campbell River
- Chilliwack
- Duncan
- Port Alberni

Cost Estimate = \$2.00/m³

4.5.4 Road and Land Use Charges

Where applicable in the following options and prior to a stumpage appraisal cost estimate being used in any appraisal, the licensee must:

- i) submit a "Request for Approval of a Road Use Charge" form with the Appraisal Data Sheet; and
- ii) receive written approval of the road or land use charge from the Director, Valuation Branch.

A) Charges as a Share of Road Maintenance

No recognition is made of such charges. The routine road maintenance cost estimate (Section 4.5.3) includes all relevant costs whether incurred directly by the licensee or by payment to another party for services performed.

B) Charges for Other than Road Maintenance

There are three categories of road status under the Forest Act.

i) Forest Service Roads

A road that is declared, determined, built, maintained or modified by the Ministry, as defined in the Forest Act. No road use charges will be considered in appraisals;

ii) Operations Roads

Roads built on Crown land, authorized by road permit or letter of consent under the former Act, and deemed to be owned by the holder of the permit or letter until it expires, or until the holder declares non-ownership, as detailed in the Forest Act, Section 95. No road use charges will be considered in appraisals;

iii) Other Roads

Road use charges for roads on private land owned by an arm's length third party and not subject to a lease held by the licensee, his affiliate or agent of either, may be considered in appraisals provided there is no lower cost route capable of development through Crown land, when;

- a) the Crown is legally incapable of acquiring a right-of-way or road; or
- b) an existing road on non-Crown land is required only for short term timber extraction.

The charges recognized must be reasonable, must not exceed compensation that might be determined under the Forest Act, Section 94, and must be proven through the presentation of auditable documents.

C) Other Land Use Charges

Foreshore leases, camp areas and dryland sorts are treated in the same manner as operations roads. Only non-governmental short term land use charges will be considered in appraisals.

4.6 Administration and Other Costs

4.6.1 Overhead

General and Administrative Overhead cost estimates are compiled from surveyed expenses at the corporate licensee level and include all aspects of executive and administrative support functions at the Head Office, operating and support costs of the logging and log supply departments, all right-of-way easements, foreshore and other land leases necessary for the logging function, and the consolidated corporate Forest Management and Engineering functions.

Operational Overhead is compiled from the surveyed harvesting operations and includes supervisory, administrative and vehicle support functions; it also includes cruising, environmental protection measures (including hydro and other seeding) and the cost of performing residue and waste surveys.

Any costs that will be reimbursed through the *Forest Act, Section 88*, or by funding from any Crown agency are excluded except as noted in Section 6.5.

The cost estimates are:

General and Administrative Overhead	(\$/m ³) = 3.56
Operational Overhead	(\$/m ³) = 8.19
Total Overhead	<hr/> (\$/m ³) = 11.75

4.6.2 Woods Run

Woods Run refers to moving crews from the appraisal marshalling area, on roads suitable for crew buses, to the centre of the work area in the cutting authority being appraised, and return. The appraisal marshalling area is defined for accessible cutting authorities (Sec. 4.6.3.1) and isolated cutting authorities (Sec. 4.6.3.2).

i) Accessible Cutting Authorities

The appraisal marshalling area is specified by the Appraisal Co-ordinator as the most logical place considering the location of the timber being appraised, the existing roads, and the nearest communities. The appraisal marshalling area need not be the location actually used by a given licensee.

ii) Isolated Cutting Authorities

The appraisal marshalling area is the camp location or where there is no camp the vehicle storage area.

Where more than one appraisal marshalling area is reasonable, the area chosen for appraisal purposes is the one which yields the least total operating cost estimate according to this manual.

Included in the cost estimate are:

- driver or labour costs
- crew travel-time labour costs
- vehicle owning and operating costs (depreciation, leases, rentals)

The formula for woods run is:

$$$/m^3 = 3.0534 - \frac{24.1510}{(D + 9)}$$

Where: D is the weighted average one-way distance in kilometres (rounded to the nearest 0.1) from the appraisal marshalling area to the centre of the cutting authority. The method of calculation of D is similar to Section 4.5.1 except the words "marshalling area" replace "appraisal log dump where trucks are off-loaded".

Where: D=0, the Woods Run estimate is equal to zero.

Definition:

The *nearest community* must be incorporated as a city, district municipality, town or village and must have retail food and gasoline services located nearby. The centre of the nearest community, used for measurement purposes only, is deemed to be the main post office.

4.6.3 Accommodation

The accommodation phase cost estimate recognizes two types of logging operations according to the mode of access to the highway system:

1. Accessible Cutting Authority

An accessible cutting authority is one where the appraisal marshalling area is connected, by a road suitable for crew buses, to a highway and then to the centre of the nearest community, provided that the one way travel time for crew buses, on the average would be less than 75 minutes.

The cost estimate covers the depreciation, maintenance and operating costs of camp and crew marshalling area facilities; provides for the non-recoverable costs incurred for cookhouses, family quarters, bunkhouses, shop and office and other pertinent buildings; and provides for daily and/or periodical commuting costs.

The cost estimate for cutting authorities which meet the accessible definition is:
\$1.24/m³.

2. Isolated Cutting Authority

An isolated cutting authority is one which is not "accessible". This includes all cutting authorities where a portion of the access is by water or air only.

The cost estimate covers the depreciation, maintenance and operating cost of camp and marshalling area facilities; the non-recoverable costs incurred for cookhouses, family quarters and bunkhouses, shop and office and other pertinent buildings; daily and/or periodical commuting cost from the camp to residential facilities; and camp and equipment moves of less than 10 km by water.

The cost estimate for isolated cutting authorities is: \$4.42/m³.

4.6.4 Low Volume Cost Estimate Additive

All replaceable and non-replaceable fully appraised cutting authorities are eligible for a low volume cost estimate additive.

The cost estimate additive is:

$$$/m^3 = \$4.52 - [.0015 * (V - 2000)]$$

Where the maximum additive is limited to \$4.52/m³ and V must be less than or equal to 5000 m³

"V" = the lesser of the cutting authority net cruise volume or the licence's Allowable Annual Cut of Crown Timber (if applicable).

4.7 Total Logging Cost Estimate

The Total Logging Cost estimate is the sum of all previous phase cost estimates.

4.8 Basic Silviculture

Basic silviculture cost estimates are made for all appraised cutting authorities where basic silviculture is required.

The cost used for basic silviculture treatment carried out on land which the licensee is required to establish a free-growing crop of trees, as specified in the *Forest Act*, depends on the geographic location of the appraised cutting authority.

Basic silviculture treatment may not be required on some cutting authorities (e.g. right-of-way, licence-to-cut, commercial-thinning). A basic silviculture cost estimate is not included in the appraisal where this intent has been specified in the licence document, cutting authority or by applicant's agreement. Nor is a basic silviculture cost estimate included in the appraisal if the work is funded through the *Forest Act, Section 88*, or by any Crown agency, except as noted in Section 6.5. In these cases the cost estimate equals \$0.00/m³.

The dollar per cubic metre (\$/m³) cost estimates net of overhead are:

Forest District	\$/m ³	Forest District	\$/m ³
Mid Coast	.96	Duncan	1.53
Queen Charlotte Isl.	.63	Port Alberni	1.45
Chilliwack	1.08	Campbell River	.90
Squamish	1.30	Port McNeill	1.13
Sunshine Coast	1.58	North Coast	1.22

4.9 Cost Trend

A cost trend factor is separately applied to the total logging and the basic silviculture cost estimates. The factors cover the period from the effective date of the cost base to the effective date of the stumpage rate calculation. Cost trends are shown in the following table, based on a 1% per annum rate.

APPRAISAL EFFECTIVE DATES BEFORE APRIL 1, 1991 (cost base July 1, 1986)

Stumpage Adjustment Date	Trend Factor
October - December, 1993	1.073
January - March, 1994	1.075
April - June, 1994	1.078
July - September, 1994	1.080
October - December, 1994	1.083

APPRAISAL EFFECTIVE DATES AFTER MARCH 31, 1991 AND BEFORE APRIL 1, 1992 (cost base July 1, 1988)

Stumpage Adjustment Date (or Appraisal Effective Date)	Trend Factor
October - December, 1993	1.053
January - March, 1994	1.055
April - June, 1994	1.058
July - September, 1994	1.060
October - December, 1994	1.063

**APPRAISAL EFFECTIVE DATES AFTER APRIL 1, 1992 AND BEFORE
OCTOBER 31, 1992 (cost base July 1, 1989)**

Stumpage Adjustment Date (or Appraisal Effective Date)	Trend Factor
October - December, 1993	1.043
January - March, 1994	1.045
April - June, 1994	1.048
July - September, 1994	1.050
October - December, 1994	1.053

**APPRAISAL EFFECTIVE DATES AFTER NOVEMBER 1, 1992 AND BEFORE
JANUARY 1, 1994 (cost base July 1, 1990)**

Stumpage Adjustment Date (or Appraisal Effective Date)	Trend Factor
October - December, 1993	1.033
January - March, 1994	1.035
April - June, 1994	1.038
July - September, 1994	1.040
October - December, 1994	1.043

**APPRAISAL EFFECTIVE DATES AFTER JANUARY 1, 1994
(cost base July 1, 1992)**

Stumpage Adjustment Date (or Appraisal Effective Date)	Trend Factor
January - March, 1994	1.015
April - June, 1994	1.018
July - September, 1994	1.020
October - December, 1994	1.023

The trend factor is applied to the Total Logging Cost Estimate and the Basic Silviculture cost estimate at the appraisal effective date and at the date of each stumpage rate adjustment.

Stumpage Rate Determination

5

5.1 Indicated Stumpage Rate

The Indicated Stumpage Rate is determined by comparing the Value Index of the stand being appraised to the Value Index of other stands, as explained in the following sections.

5.2 Value Index

The stumpage rate charged on each cutting authority is keyed to the estimated Value Index of the stand to be harvested. The Value Index is defined as the Selling Price less the Operating Cost, both of which are estimates expected for an average operator in that stand. The formula to be used is:

$$VI = SP - OC$$

Where:

- VI = Value Index for the cutting authority.
- SP = estimated stand Selling Price determined in accordance with Chapter 3.
- OC = estimated Operating Cost applicable to the timber being appraised, and determined in accordance with Chapter 4.

5.3 Mean Value Index

The Mean Value Index (MVI) is the benchmark against which individual stands of timber are compared. The Mean Value Index is recalculated and published by Valuation Branch at the time of each general stumpage adjustment. When distributed it becomes an integral part of this manual.

5.4 Market Value Indexing

At the times specified in Section 1.6, stumpage rates are adjusted upwards or downwards to reflect changes in the value of softwood lumber as indicated by the Statistics Canada British Columbia Softwood Lumber index for the Coast, number D693601.

A new target rate is determined by the following formula:

$$\text{New Coast Target Rate} = \frac{\text{New Statistics Canada Index} * \$10.59/\text{m}^3}{138.5}$$

<u>Stumpage Rate Adjustment Date</u>	<u>New Statistics Canada Index based on index values for the months of:</u>
January 1	Preceding August, September, October
April 1	Preceding November, December, January
July 1	Preceding February, March, April
October 1	Preceding May, June, July

The applicable Statistics Canada Index is published by Valuation Branch at the time of each general stumpage adjustment. When distributed it becomes an integral part of this manual.

5.5 Base Rate

The Coast Base Rate is redetermined and published by Valuation Branch at the time of each general stumpage rate adjustment. When distributed it becomes an integral part of this manual.

5.6 Calculation of Stumpage Rate

5.6.1 Calculation of Indicated Stumpage Rate

The Indicated Stumpage Rate for a cutting authority is defined as:

$$IR = BR + (VI - MVI)$$

Where:

- IR = Indicated Rate
- BR = Base Rate as defined in Section 5.5
- VI = Value Index for the cutting authority as defined in Section 5.2
- MVI = Mean Value Index, as defined in Section 5.3

5.6.2 Prescribed Minimum Stumpage Rate

The Minimum Stumpage Rate is prescribed by the *Minimum Stumpage Rate Regulation* (B.C. Reg. 354/87). The current Minimum Stumpage Rate is \$0.25 per cubic metre.

5.6.3 Reserve Stumpage Rate

For each cutting authority, the Reserve Stumpage Rate is the greater of its Indicated Stumpage Rate or the prescribed Minimum Stumpage Rate.

5.6.4 Upset Stumpage Rate

The Upset Stumpage Rate is the total of the Reserve Stumpage Rate plus any silviculture and development levies which may be charged as defined in Section 6.5.

5.6.5 Total Stumpage Rate

The Total Stumpage Rate is the Upset Stumpage Rate plus any Bonus Bid.

Misc. Timber Pricing Policies

6

6.1 Value Indexes by District and Species

A new table of Value Indexes by District and Species is prepared at the time of each general stumpage adjustment and becomes an integral part of this manual at that time. This table may be used by the Regional Manager to determine the Value Index for cutting authorities of less than 2,000 m³, as explained in Section 6.2.

6.2 Cutting Authorities With 5 000 m³ or Less Volume

A. Total Volume of less than 2 000 m³

An indicated stumpage rate may be determined by estimating the species volumes, prorating the appropriate Average Value Indexes by District and Species according to those volumes, and then using the resulting stand value index in the stumpage rate formula as described under Section 5.6. For cutting authorities where the licensee is not required to establish a free growing crop of trees, the Value Indexes must be adjusted by adding a basic silviculture cost estimate. (District Average Value Indexes are based on full appraisals of areas requiring basic silviculture.) The total stumpage rate is fixed for the term and all extensions of the cutting authority.

Alternatively, an indicated stumpage rate may be determined through a full appraisal. The stand data may be site-specific or obtained from one or more comparable cutting authorities (e.g. similar stand and terrain characteristics, etc.). The total stumpage rate is adjustable for the term of the cutting authority, except as provided in Section 6.4.

Each full appraisal is made as described in Chapters 3 and 4.

B. Total Volume of 2 000 to 5 000 m³

An indicated stumpage rate is determined on the basis of full appraisal data. The data may be site-specific or the data may be obtained from comparable cutting authorities, as determined by the Regional Manager.

Each appraisal is made as described in Chapters 3 and 4.

These sales are cruised if specified by the Regional Manager in accordance with Section 4.2 of this manual.

The total stumpage rate is adjustable for the term of the cutting authority, except as provided in Section 6.4.

6.3 Partially Harvested Timber

In the case of decked timber, or timber which has been felled and bucked, such as on rights-of-way, and where the stumpage value is over \$3,000 or volume exceeds 300 m³, a full cost estimate appraisal is completed upon an "as is , where is" basis.

6.4 Small Business Forest Enterprise Program (SBFEP) Sales

For appraisal purposes, the SBFEP includes:

- ALL TIMBER SALE LICENCES issued under the *Forest Act, Sections 16 and 16.1*.
- All TSLs issued under the Forest Act, Section 18 except 18 (1)(b) and 18(1)(c).

Fixed/Adjustable Stumpage Rates for SBFEP Cutting Authorities

The adjustable rate option can be provided to a licensee only if the upset rate has been determined by means of a full appraisal. The data may be site-specific or may be obtained from one or more comparable cutting authorities. If the District Value Index method is used, the upset and hence the total stumpage rate is fixed for the term of the cutting authority and all extensions.

During the term of the cutting authority, a licensee's election of fixed stumpage rates also precludes any correction to the upset stumpage rate determination that would otherwise be warranted because of an error in the appraisal.

6.5 Levies

The amount of any levy may be redetermined at reappraisals only.

i) Basic Silviculture Levy:

A basic silviculture cost estimate is made for every cutting authority that will require basic silviculture, including those with a volume of less than 2000m³.

A basic silviculture levy may be added to the Reserve Stumpage Rate. The levy is \$0.00/m³ if no Crown expenditures are anticipated for basic silviculture, or the District Manager may set the levy at \$0.00/m³ if the sale is offered under the *Forest Act, Section 16*, and the District Manager is satisfied that there will be competition for the sale. Otherwise the silviculture levy is equal to the appraisal estimate of basic silviculture costs (trended at the time of the appraisal).

ii) Development Levy:

A development levy may be added to the Reserve Stumpage Rate. The levy is \$0.00/m³ if no Crown expenditures are anticipated for road construction and other services, or the District Manager may set the levy at \$0.00/m³ if the sale is offered under the *Forest Act, Section 16*, and the District Manager is satisfied that there will be competition for the sale. Otherwise, the development levy is equal to the appraisal cost estimate of road construction and other extraordinary services provided by the Crown as determined by the Regional Manager (trended at the time of the appraisal).

6.6 Miscellaneous Stumpage Rates

Vancouver Forest Region and North Coast Forest District

CONIFEROUS SPECIES	PRODUCT	RESERVE RATE
Cedar	Shake and Shingle Bolts and Blocks	\$ 5.30/m ³
Cedar	Shakes - Handsplit	\$ 6.00/m ³
Cedar	Shakes - Blanks	\$ 7.20/m ³
Cedar	Fence Posts and Fence Rails	\$ 3.00/m ³
Cedar	Sticks and Stakes	\$ 2.00/m ³
Cedar	Hop Poles	\$ 1.30/m ³
Cedar	Cants	\$ 9.60/m ³
Cypress	Cants Note: Cants are produced from dead and down post logging material that would not make a sawlog as determined by the Regional Manager	\$37.00/m ³
Yew	All	\$ 0.25/m ³
<i>Deciduous Species</i>		
Alder & Cottonwood	The lesser of the appraised stand as a whole reserve rate or	\$1.00/m ³
All other Deciduous Species	The reserve rate is	\$1.00/m ³
<i>All Species</i>		
All Species	Grade Y	\$ 0.25/m ³
All Species	Firewood	\$ 1.00/m ³
All Species	Christmas Trees: less than 3m 3 to 5m More than 5m	\$ 0.20 each \$ 1.00 each \$ 1.50 each
All Species	Logs salvaged in the Vancouver Log Salvage District under the <i>Forest Act, Part 11</i> , and stray logs salvaged elsewhere in coastal waters below the high tide mark (unless logs are salvaged from an area while it is under closure under the <i>Forest Act, Section 139</i>).	\$ 0.70/m ³
All Species	Logs salvaged at Wahleach Island catchment basin operated by B.C. Debris Control Board.	\$ 0.25/m ³

Appendices

7

Appendix I Equipment and Labour Rates**(Cost Base July 1, 1992)**

<i>MACHINE DESCRIPTION</i>	<i>TYPICAL MODELS</i>	<i>\$/HOUR</i>
Bulldozer	Cat D-8, TD25, Komatsu D155A-1	157.75
Bulldozer	Cat D-7, TD20, Komatsu D85	128.75
Bulldozer	Cat D-6, TD15, Komatsu D65	110.00
Rock Drill includes labour	All	147.00
Grader	Cat 14G, Komatsu GD705,725	96.00
Front End Loader (Gravel)	Cat 966, Komatsu WA470	117.50
Front End Loader (Logs)	Cat 980, Komatsu WA500	127.50
Heel Boom Loader	All Cable	153.95
Heel Boom Loader	All Hydraulic	137.52
Hydraulic Excavator inc. Brush Guard & Thumb	Cat 235, Hitachi, UH171 etc	167.75
Hydraulic Excavator inc. Brush Guard & Thumb	Cat 225, Hitachi EX270, etc	135.58
Hydraulic Excavator inc. Brush Guard	JD 490, Hitachi EX150, etc	91.61
Gradall	54,100-62,300 kg - m	134.50
Logging Truck (Highway)	Triaxle	98.75
Logging Truck (Off Highway)	All	115.97
Self Loading Log Truck	Highway log truck + 4.5 t deck crane	80.05
Gravel Truck (with rock box)	9.9+m ³	62.50
Gravel Truck Articulated	20-30 Tonne	94.40
Lowbed	36tonne	76.50
Lowbed	150 tonne	115.97
Concrete Mix Truck	6 m ³	80.50
Concrete Vibrator (labour not included)	5 m ³	3.88
Concrete Mixer (labour not included)	.17m ³	6.13
Crane - Truck mounted	18 tonne	83.50
Soft Track Skidder	KMC 200	110.50
Rubber Tired Skidder	Clark 668	75.25
Vibrator Compactor	Clark 668 + 2.7 - 3.6t roller	86.95
Tractor and Grid roller	Clark 668 + grid roller	87.05
Labourer		24.21
Roadman		24.42
Crib/Culvert Maker		25.72
Landingman		26.07
Rockdriller & Helper (for load & blast only)		55.27
Bridgeman		32.12
Powersaw (labour not included)	All	4.25
Faller, including powersaw		48.71

NOTES

Rates based on 1992 logging cost surveys, Province of British Columbia Hydro and Power Authority and B.C. Rail. Equipment Rental Rate Guide (1991-92-93) (rates based on a 3 year old machine), and IWA agreement rates including payroll loading.

Notes:


- All equipment rates include labour for operators and swampers unless otherwise noted.
- Labour components include all payroll loading.
- Lowbedding cost estimates for tracked equipment only may be recognized for Detailed Engineering Cost Estimates (S. 4.3.3).

The degree of recognition of lowbedding costs varies by the estimated number of hours of each machine usage as follows:


- i) 1 - 40 hours: to and from the site (mobilization and demobilization)
- ii) 41 - 80 hours: to the site (mobilization) only
- iii) 81 plus hours: nil

The equipment hourly rate fully includes lowbedding costs (interphase transfer in) for projects of longer duration (i.e. tabular cost estimated roads).

Appendix II Reconstruction and Replacement

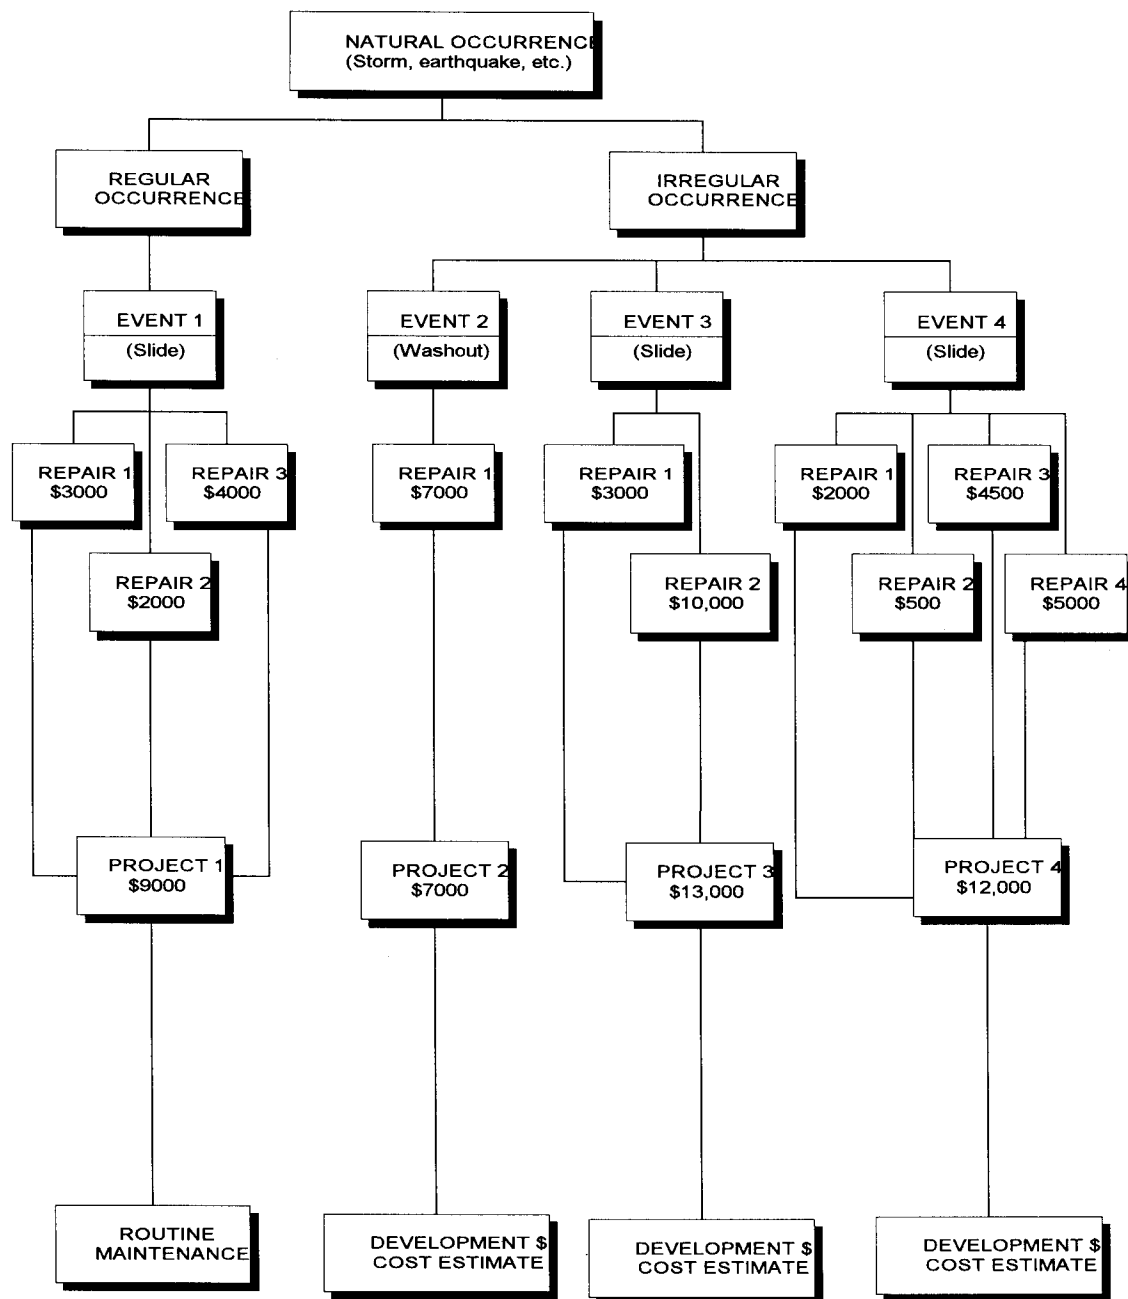

Appendix III Development Cost Allocation

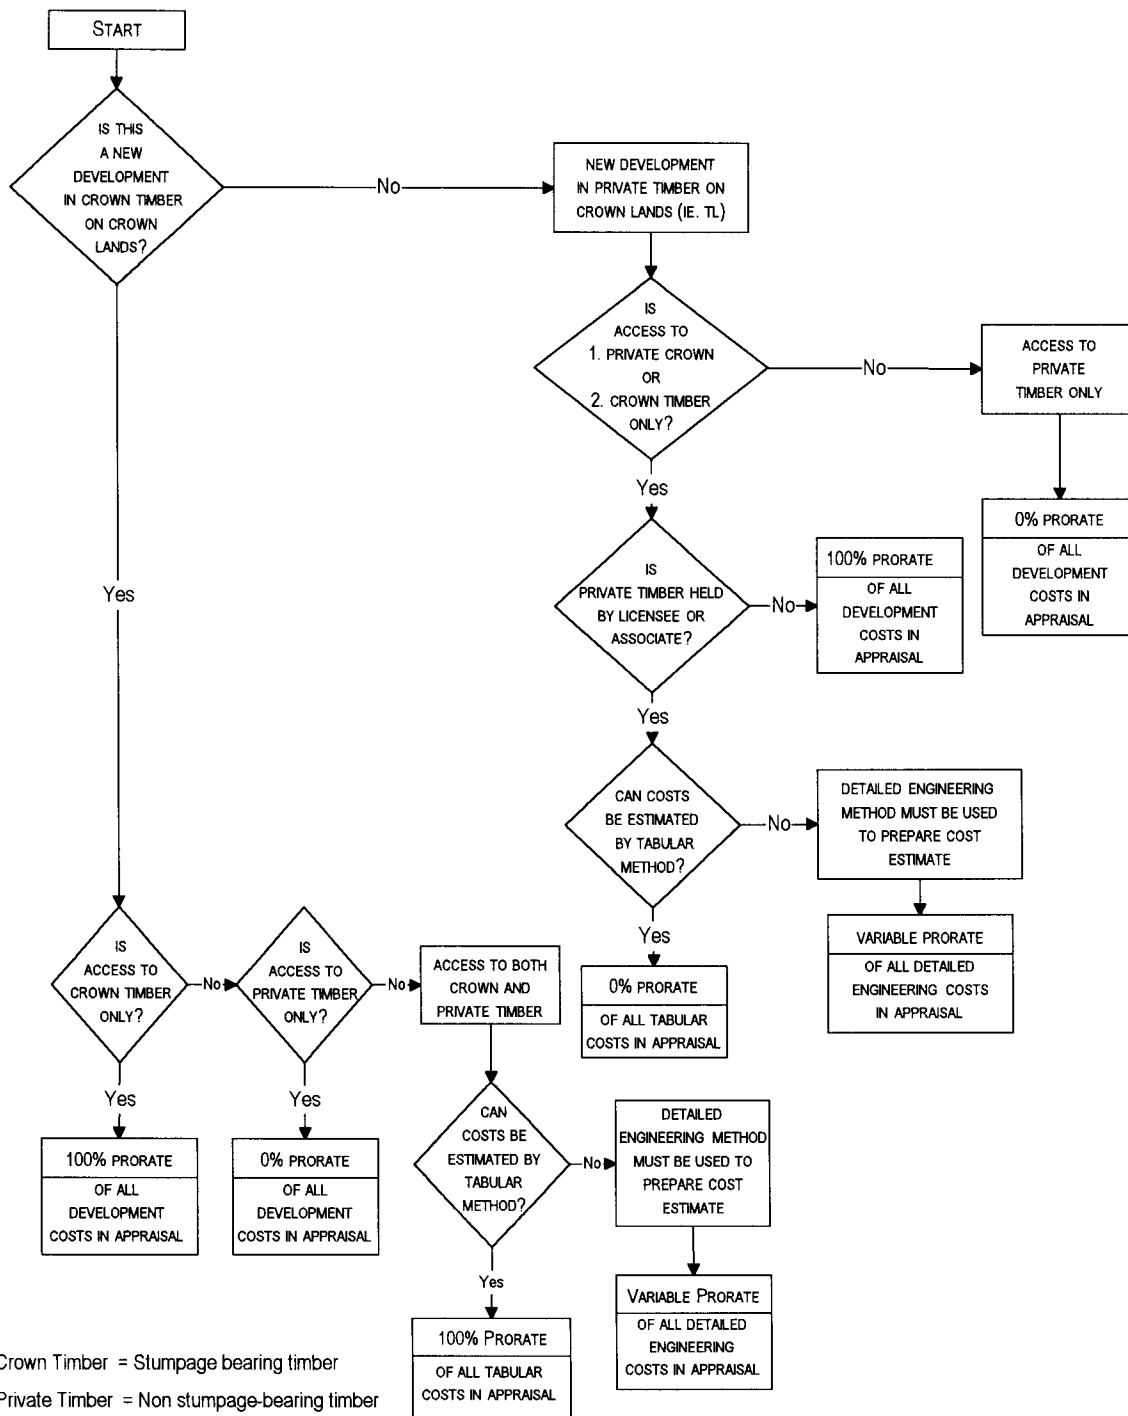

Crown Timber = Stumpage bearing timber

Private Timber = Non stumpage-bearing timber

Variable Prorate = A tributary-volume type
prorate between stumpage-bearing and non-stumpage bearing timber

Appendix IV Rock Mass Classification

<u>SURFACE HARDNESS</u>	<u>SUBSURFACE HARDNESS</u>				
	<u>WEATHERING ON SURFACE</u>				
	<u>W1</u>	<u>W2</u>	<u>W3</u>	<u>W4</u>	<u>W5</u>
H2	R2	R2	R2,R3	R3,R4	R4,R5
H3	R3	R3	R3,R4	R4,45	
H4	R4	R4	R4,R5		
H5	R5	R5			

Hardness Factors

- H2 Can be scraped and peeled by a pocket knife with difficulty. Shallow indentations (i.e. 1/16 inch to 1/8 inch) made by firm blow of geological pick.
- H3 Cannot be scraped or peeled with a pocket knife. Hand-held specimen can be fractured with single firm blow of hammer end of geological pick.
- H4 Hand-held specimen requires more than one blow with hammer end of geological pick to fracture it.
- H5 Hand-held specimen is very hard and requires many blows of hammer end of geological pick to fracture it.

Weathering Factors

- W1 The rock shows no loss of strength or any other effect of weathering other than slight staining on a few discontinuities*.
- W2 The intact rock is slightly discoloured but not noticeably lower in strength than the fresh rock. The discontinuities are discoloured and some discoloration extends into the rock.
- W3 The intact rock is discoloured and noticeably weakened. Discontinuities are stained and/or contain filling comprising altered material.
- W4 Discolouration and weakening extends throughout rock mass and rock mass tends to crumble somewhat. Rock can be excavated with geological pick.
- W5 The rock is totally discoloured and decomposed and is entirely changed to a soil but the original structure of the rock is mostly preserved.

* The term discontinuities refers to natural breaks, shears or faults in the bedrock.

RMC VALUE

<u>SURFACE HARDNESS</u>	<u>AVERAGE BLOCK DIAMETER</u>				
	<u>0 to 3"</u>	<u>3" to 6"</u>	<u>6" to 1'</u>	<u>1' to 4'</u>	<u>4'+</u>
R2	RMC1	RMC2	RMC2	RMC2	RMC2
R3	RMC2	RMC2	RMC3	RMC3	RMC3
R4	RMC2	RMC3	RMC4	RMC4	RMC4
R5	RMC3	RMC4	RMC5	RMC5	RMC5

Description of RMC Values

RMC1 Rock crumbles under firm blows with the point of a geological pick and can be peeled by a pocket knife (R1). The average block diameter is not important. The rock may be harder (R2) but must have an average block diameter of less than 3 inches. This rock can be excavated by free digging or ripping.

RMC2 Rock can be scraped and peeled by a pocket knife with difficulty and shallow indentations (i.e. 1/16 inch to 1/8 inch) can be made by a firm blow of a geological pick (R2) and has an average block diameter greater than 3 inches. The rock may be somewhat harder (R3) but must have an average block diameter less than 6 inches or hard (R4) and have an average block diameter less than 3 inches. The rock is usually rippable.

RMC3 Rock cannot be scraped or peeled with a pocket knife. Hand-held specimen can be fractured with a single firm blow of the hammer end of a geological pick (R3) and has an average block diameter greater than 6 inches. Rock may be harder (R4) but must have an average block diameter of 3 to 6 inches or very hard (R5) and have an average block diameter of less than 3 inches. The rock is usually not rippable.

RMC4 Hand-held specimen requires more than one blow with hammer end of geological pick to fracture it (R4) and has an average block diameter greater than 6 inches. Rock may be very hard (R5) but must have an average block diameter of 3 to 6 inches. The rock must be blasted.

RMC5 Hand-held specimen is very hard and requires many blows of the hammer end of a geological pick to fracture it (R5) and has an average block diameter greater than 6 inches. The rock must be blasted.

Index

I

A

A-frame Logging, 4-3
Accessible Cutting Authority, 4-35, 4-36
Accommodation, 4-36
Additional Stabilizing Material, 4-20
Administration and Other Costs, 4-34
Amendments, 2-4
Appendices, 6-1
Appraisal Coordinator, 1-3
Appraisal Data Requirements, 4-4
Appraisal data submission (Coast Appraisal Data Sheet), 2-2
Appraisal Principles & Procedures, 1-1
Area of Application, 1-2
Average Market Value (AMV)
Determination, 3-2

B

Balloon Logging, 4-3
Barge transportation, 4-29
Barging Cost Estimates, 4-31
Base Rate, 5-4
Basic Silviculture, 4-37
Basic Silviculture Levy, 6-3
Billing history record, 3-3
Billing Period, 3-3
Blowdown Timber, 4-3
Bonus Bid, 1-4, 5-4
Bridge Cost Estimate, 4-19
Bridge Cost Estimates, 4-7

C

Calculation Conventions, 2-7
Calculation of Indicated Stumpage Rate, 5-4
Calculation of Stand Selling Price (SP), 3-5
Calculation of Stumpage Rate, 5-4

Camp Moves of greater than 10 km, 4-3
Capping, 4-22
Charges as a Share of Road Maintenance, 4-33
Charges for Other than Road Maintenance, 4-33
Coast Appraisal Data Sheet, 4-4
Commercial Thinning, 4-3
Comparative Value Timber Pricing, 1-4
Construction Category (CC), 4-15
Conventional Logging, 4-25
Cost Estimates, 4-2
Cost Trend, 4-38
Cruise Compilation, 4-4
Cutting Authorities With 5 000 m³ or Less Volume, 6-2
Cutting Authority, 1-3
Cutting Authority Area, 1-3

D

Damaged Timber, 3-4
Data Requirements, 4-23
Deactivation, 4-9
Definitions for In-Place & Quarry rock RMC (hardness), 4-22
Destumping for root disease control, 4-3
Detailed engineering cost estimates, 4-6, 4-7, 4-23
Development Cost Allocation, 4-10, 7-5
Development Cost Categories, 4-6
Development cost estimates in non-stumpage-bearing timber, 4-11
Development cost estimates in stumpage-bearing timber, 4-11
Development Costs on Private Land, 4-13
Development Levy, 6-4
Development works, 4-5
Distance, 4-28
District Manager, 2-2
Drainage Structures, 4-19
Dump, Sort, Boom and Scale, 4-29

E

Equipment and Labour Rates, 7-2

Error in Appraisal, 2-5
Existing Roads and Structures, 4-13
Extended Road Amortization, 4-14
Extension of Term, 2-6

F

Fixed rate cutting authorities, 2-3
Forest Act, 1-3
Forest Act, Section 84, 2-2
Forest Service Roads, 4-33
Full appraisal, 2-2

G

General and Administrative Overhead, 4-34

H

Helicopter Logging, 4-26
Horse Logging, 4-3

I

Immature Coniferous Timber, 2-7
In-place Unit Cost Estimates, 4-21
Indicated Stumpage Rate, 1-4, 5-2
Isolated Cutting Authority, 4-36

L

Lake Transportation, 4-3
Land Drop, 4-26
Least total operating cost estimate, 4-2
Levies, 6-3
Log Grade Percentages, 3-2
Log Transportation, 4-28
Low Volume Cost Estimate Additive, 4-37
Low Volume Cypress Exception, 3-4

M

Main Service Road, 4-5
Market Value Indexing, 5-3
Mean Value Index, 1-4, 5-2
Minimum Stumpage Rate, 1-4
Minister's Direction, 2-5

Misc. Timber Pricing Policies, 5-1
Miscellaneous stumpage rates, 1-4, 6-5

N

Nearest community, 4-35
New Construction, 4-6
No trucking of stabilizing material, 4-21

O

Operating Cost, 1-4
Operating Cost Estimation, 3-1
Operational Overhead, 4-34
Operations Roads, 4-33
Order-in-Council, 2-2
Other Land Use Charges, 4-33
Other Roads, 4-33
Overhead, 4-34

P

Partially Harvested Timber, 6-3
Point of Appraisal, 2-6
Prescribed Minimum Stumpage Rate, 5-4

R

Railway Transportation, 4-3
Reappraisal, 2-3
Reappraisal at Anniversary Date, 2-4
Reconstruction and Replacement, 4-8, 7-4
Regional Manager, 2-2
Regional Valuation staff, 2-2
Reserve Stumpage Rate, 1-4, 5-4
Road and Land Use Charges, 4-32
Rock Mass Classification, 4-16, 7-6
Routine Maintenance, 4-32

S

Selection of Log Grade Percentages, 3-2
Selective Logging, 4-3
Selling Price, 1-4
Selling Price Estimation, 2-1
Skidder Swinging, 4-3
Skyline Logging, 4-3

Small Business Forest Enterprise Program (SBFEP) Sales, 6-3
Sources of Log Grade Percentages, 3-4
Specified Operations, 4-3
Stabilizing Cost Estimate, 4-22
Statistics Canada Softwood Lumber Index, 1-5
Stumpage Determination, 1-3
Stumpage Rate Adjustments, 1-5
Stumpage Rate Determination, 4-1
Subgrade Construction, 4-15
Subgrade Construction Cost Estimate, 4-18
Subgrade cost estimates, 4-16
Sudden and severe damage, 2-3

T

Tabular cost estimates, 4-5, 4-6, 4-15
Terms of Reference, 1-2
Time Schedule, 2-2
Total Logging Cost Estimate, 4-37
Total Overhead, 4-34
Total Stumpage, 1-4
Total Stumpage Rate, 5-4
Total Volume of 2 000 to 5 000 m³, 6-2
Total Volume of less than 2 000 m³, 6-2
Towing Cost Estimates, 4-30
Towing or Barging, 4-29
Towing to Tie-up Grounds over 10 km Distance, 4-3
Tree To Truck, 4-25
Tributary, 4-5
Truck Hauling, 4-28
Trucking of stabilizing material, 4-21
Types of Determination, 2-2

U

Upset Stumpage Rate, 1-4, 5-4

V

Value Index, 1-4, 5-2
Value Indexes by District and Species, 6-2

W

Water Drop Operations, 4-26
Water Transportation, 4-29
Woods Run, 4-34

Z

Zone 1 (North), 4-32
Zone 2 (South), 4-32



COAST APPRAISAL DATA SHEET

Licence _____ Permit _____ Mark _____

ACKNOWLEDGEMENTS

Licensee or Licensee's Agent

I certify this appraisal data sheet is a true statement of timber stand, site conditions and/or harvesting, development, silviculture and any other requirements for the documents named herein.

Name: _____
(Please print)

Representing: _____
(Licensee name)

Date: _____ Phone # _____

Forest District Appraisal Staff (This data sheet must be signed by at least two Forest District staff)

Entries on this appraisal data sheet have been reviewed for accuracy and completeness, and revised where necessary.

Receipt of submission: _____
(YEAR/MM/DD)

Data Field
Checked By: _____ Date: _____
(Name) (Position) (YEAR/MM/DD)

Data Sheet
Prepared By: _____ Date: _____
(Name) (Position) (YEAR/MM/DD)

and
Reviewed by
Supervisor: _____ Date: _____
(Name) (Position) (YEAR/MM/DD)

Forest Region Staff

Received by Region on: _____
(YEAR/MM/DD)

COAST APPRAISAL DATA SHEET

Reference Information (Complete for all appraisals)

Administrative Forest District _____

Geographic Forest District _____

Management Unit Type _____ (TSA, TFL, WL, TL, WSL)

TSA name _____

TSB name _____

Location _____

Licensee _____

Effective Date: _____
(YEAR/MM/DD)

New Appraisal, Reappraisal or Extension
(Circle one)

Expiry Date: _____
(YEAR/MM/DD)

Total Net Cruise Volume _____ m³

Point of Appraisal ☐ ☐ ☐ ☐

ALBE = Alberni, CHEM = Chemainus,
GAMB = Gambier Isl, PIRV = Pitt River Bridge

Is this a Specified Operation Yes / No
If Yes, give description from manual:

(1) Initial Merchantable Area (0.1) _____ ha

Amendments				
Block	Date	Additions	Deletions	ha
				ha
				ha
				ha
				ha
Totals				ha
(2) Net Amendments				ha

(3) Total Merchantable Area (0.1) (1) +/- (2): _____ ha

(4) Area Logged * _____ ha

AREA UNLOGGED (3 minus 4) _____ ha

Attach additional data requested on
Specified Operations Data Sheet.

Is this operation remote Yes / No (access by air or water only)

* Projected estimate as of reappraisal date.

COAST APPRAISAL DATA SHEET

LOG GRADE SHEET

LICENCE: _____ BILLING PERIOD: _____ m³
 PERMIT: _____ NET VOLUME MATURE CONIFEROUS: _____ m³
 MARK: _____ NET VOLUME IMMATURE CONIFEROUS: _____
 GRADE SOURCE: Cruise / Historic IS IMMATURE CONIFEROUS VOLUME ≥ 80% OF TOTAL YES/NO

Species	GRADE (%) (Region to complete)																	New Appraisal only	
	Peeler		Lumber				Sawlog				Shingle			Util.		Chip	Total Net Volume By Species (m³)	Grade Source Level (Region)	Competitive Indicator (Y/N)
	B	C	D	E	F	G	H	I	J	K	L	M	U	X	Y				
Alder													100						
Balsam																			
Cedar																			
Cottonwood													100						
Cypress																			
Fir																			
Hemlock																			
Lodgepole																			
Spruce																			
White Pine																			
TOTAL <u>NET VOLUME</u>																			

COAST APPRAISAL DATA SHEET

TREE TO TRUCK

Conventional Logging

Average Side Slope _____ %

Does this Cutting authority consist of immature coniferous: YES / NO

Helicopter Logging

Water Drop Cruise Volume _____ m³

Land Drop Cruise Volume _____ m³

LOG TRANSPORTATION

TRUCK HAULING

Average Haul Distance (0.1 km): _____ km

WATER TRANSPORTATION (Estimate based on Point of Origin)

1) Code

--	--	--	--

 Name _____
if averaging: 2) Code

--	--	--	--

 Name _____

ROUTINE ROAD MAINTENANCE

Is maintenance required? YES / NO

ROAD AND LAND USE CHARGE

If claimed, provide description of road (length and location) and copies of invoices/agreements detailing charges. Total charges (\$/m³):

--

Road-use claims must be submitted on a Request form with map and agreement attached, for the approval of Director - Valuation. **Please submit to Regional Office as soon as possible to allow time for approvals.** For further information refer to the Coast Appraisal Manual Section 4.5.4.

ADMINISTRATION & OTHER

Is woods run required? YES / NO

One-way woods run distance (0.1 km) _____ km

Marshalling Point Location _____

Camp Location _____

Is marshalling point connected to a highway by a road suitable for crew buses, resulting in a one-way trip from the nearest community to the marshalling area of less than 75 minutes?

YES / NO

NEW CONSTRUCTION

Is there tabular road construction? YES / NO

If yes, complete details on page 7. Attach extra pages if required.

Total road length (sum of all tabular road section lengths) (0.01 km) _____ km

H - Length as a percent of Total Rock Length Greater than 90% ☐

90% or less ☐

Development - New Construction - attach Construction Cost Estimate form

Page ____ of ____

CADSNV94.DOC

COAST APPRAI

Development - Tabular Roads

LICENCE

C.P.

[illegible]

Development - Reconstruction and Replacement (R/R)

- Permanent Deactivation (P. DeAct)

**** E = Engineered; T = Tabular from Appraisal Manual.**

*** Appraisal year - first year the cost was put in an Appraisal/Reappraisal.

[illegible]

COAST APPRAISAL DATA SHEET

Construction Estimate Form

Licence: _____ C.P.: _____ Estimate or as built (circle one):

Location C.P. *: _____ Development Category: New Recon/Repl PDeAct.
(Circle one)

Location Name and Road Station _____

Description: _____ Appraisal Year **: _____

Item	Machine type	Function	Hours	Rate/Hour	Sub Total	Totals
1) Machine Cost:						
2) Labour Cost:						
Materials Cost: (July 1/93)						
3) Freight + Haulage for materials only						
4) Engineering if applicable:						
TOTAL COST (July 1/93)						

Approval

Dist. Eng. _____

Dist. Tbr. _____

- 1) List each machine employed and work performed.
- 2) Rate/hour is from Equipment and Labour rates table as per current appraisal manual.
- 3) Freight + haulage allowed for permanent type bridges (i.e. steel, concrete, or glu-lam).
- 4) Cost of design + engineering for log bridges not allowed. Cost of design inspection for other more complex structures by a professional engineer not on salary may be allowed.

Note: Transfer total cost to appropriate data sheet section. If more space needed, attach another form page.

* Location CP is cutting permit where actual work occurred and the cost is allocated to this tributary cutting authority.

** Appraisal Year - First year the cost was put in an Appraisal/Reappraisal

