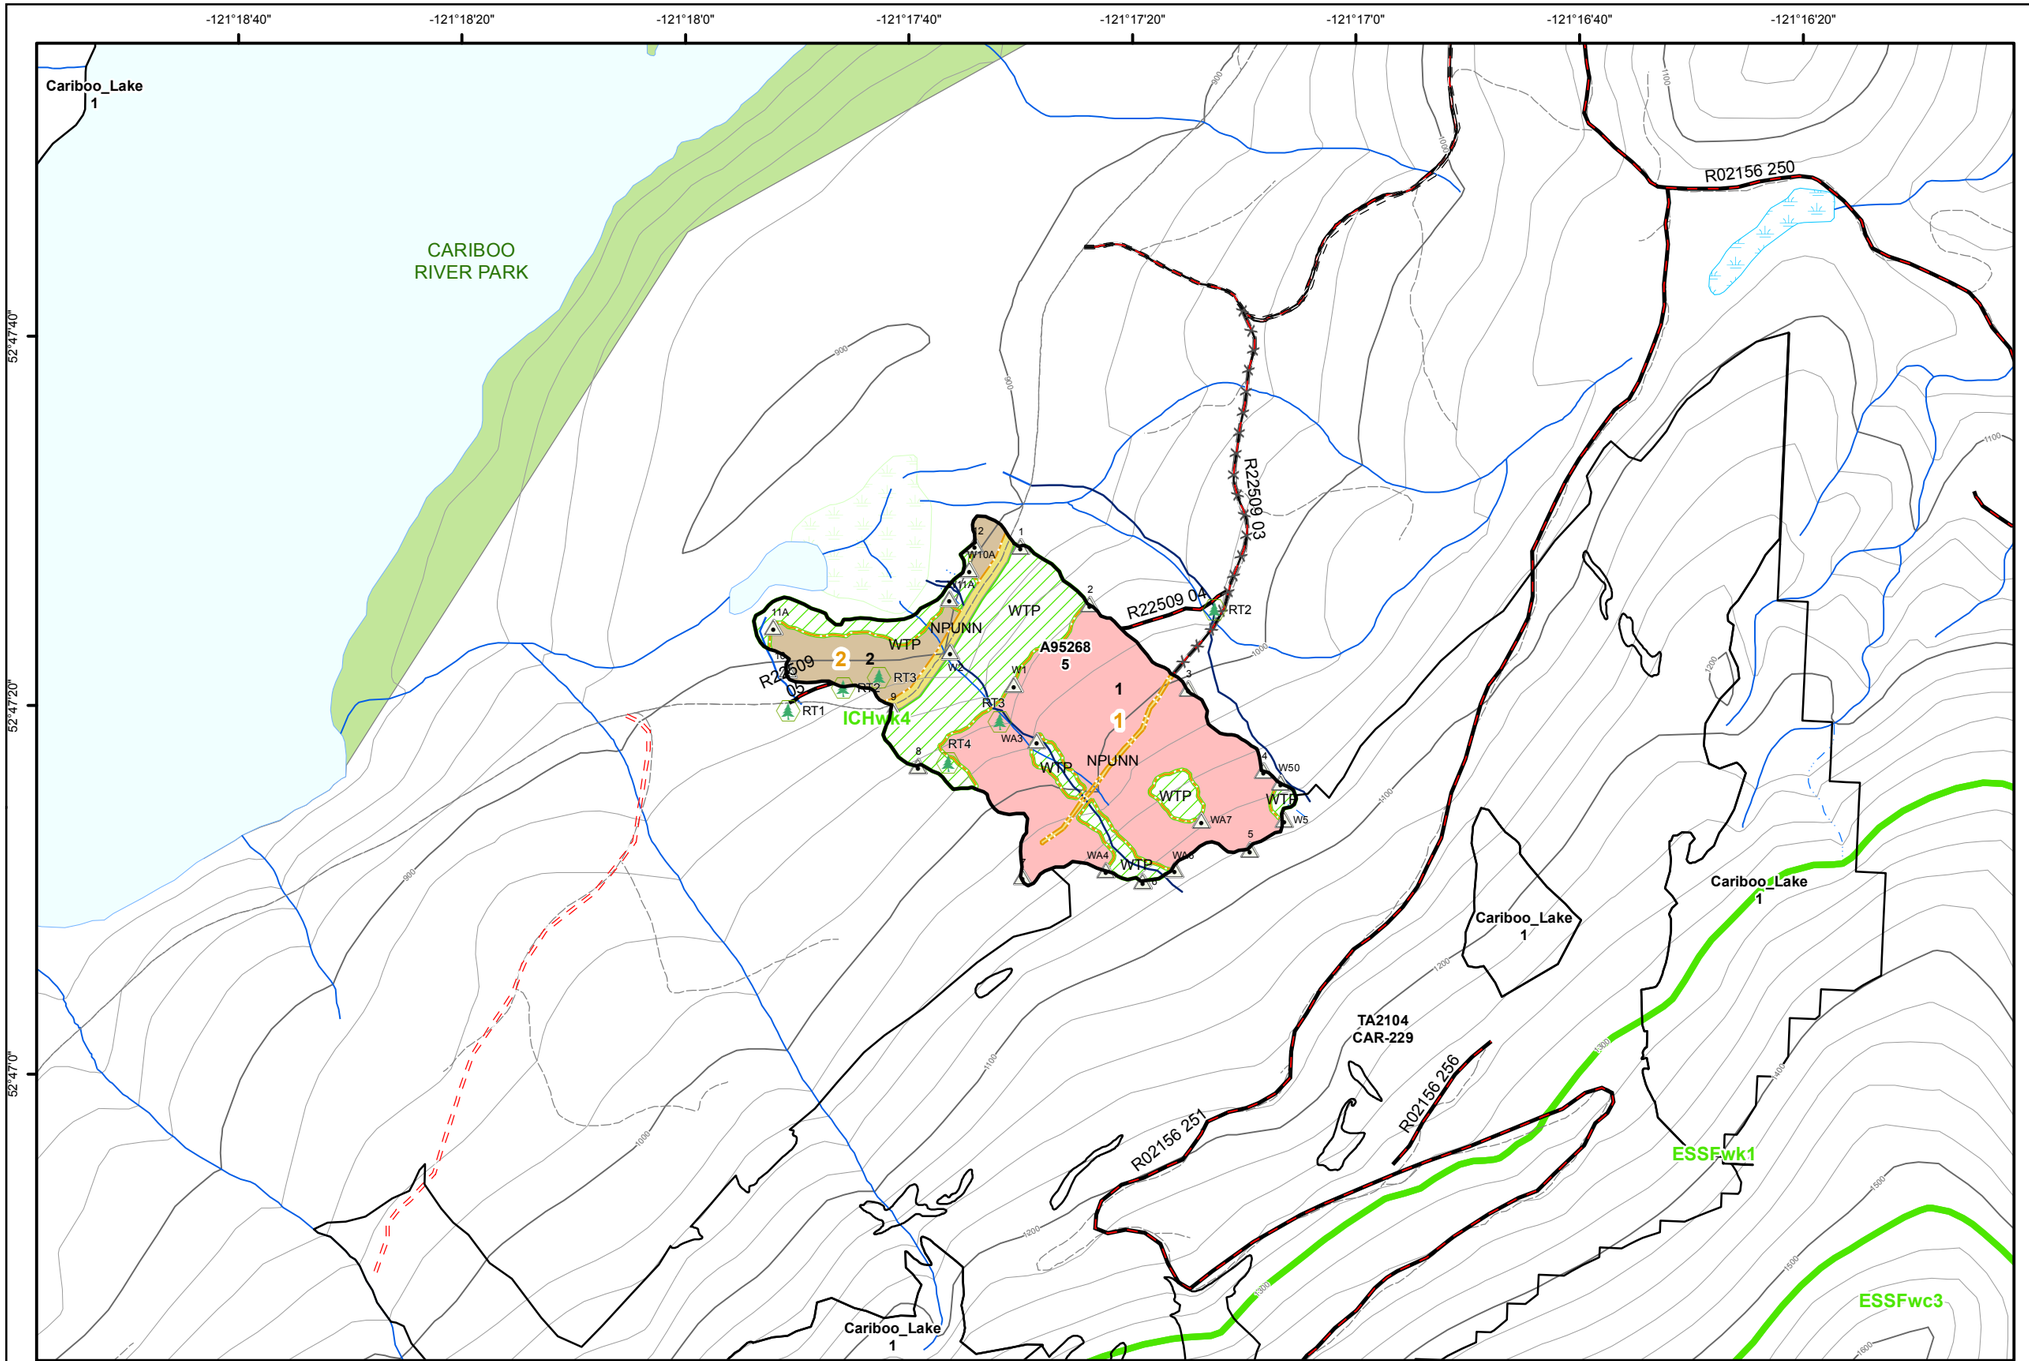

Planting Unit	Area (ha)	Status	Density (/ha)	Spacing (m) Target	Min	Max	Trees / Unit	Species Composition Detail * *(Species - Species % - Stock Age - Stock Type - Request Key - Seedlot - # Trees/Species)
1	13.45	Planned	1800				24217	Cw-10-0+0-none-none-none-2422, Pli-10-0+0-none-none-none-2422, Fdi-30-0+0-none-none-none-7265, Sx-50-0+0-none-none-none-12108
2	2.82	Planned	1800				14400	Fdi-10-0+0-none-none-none-1440, Pli-10-0+0-none-none-none-1440, Cw-20-0+0-none-none-none-2880, Sx-60-0+0-none-none-none-8640
		Planned						

Comments

PU #1
Plant 50% Sx PSB 412A 1+0, 30% Fdi PSB 412A 1+0; 10% Pli 410 1+0 and 10% Cw PSB 412A 1+0. Plant to a target density of 1800 stems/ha with target spacing of 2.53 m and minimum spacing of 1.8 m. First priority: plant within screef close to edge of the screef, and second priority: plant between screefs to meet target, if required. Ignore naturals. Use minimum spacing to ensure optimal microsites are utilized and to maintain target density. Plant mixed bag throughout block but plant a higher % of Pl in the burnt pile areas.

PU #2:
Plant 60% Sx PSB 412A 1+0, 20% Cw PSB 412A 1+0, 10% Pli PSB 410 1+0 and 10% Fdi 412A 1+0. Plant to a target density of 1800 stems/ha with target spacing of 2.53 m and minimum spacing of 1.8 m. First priority: plant on top of the mound in the centre, and second priority: plant within 20 cm of stumps to meet target, if required. Ignore naturals. Use minimum spacing to ensure optimal microsites are utilized and to maintain target density.

Access Instructions

From 150 Mile House travel along Likely Road 85.5 km to Likely. From the Likely Bridge, stay straight on Keithley Creek Road. Stay left approximately 2.7 km after bridge onto Cariboo River Road (Keithley Creek Road). Travel for 19.6 km and turn right onto 8400 Road (Cariboo River FSR). Stay on 8400 Road for 14.2 km, the PoC of 6142.01-04 Road is to the left. Continue on 8400 Road for another 175 meters to the boundary of A95268-5.

BCTS BC Timber Sales

Planting Map

TSL **A95268**	Block ID 5
Business Area Cariboo-Chilcotin	UBI BL832
Operating Area Cariboo	Management Unit Williams Lake
Gross Block Area 25.28	NAR 16.28
Min. Elev. 890 / Max. Elev. 1080	Geographic Center **Latitude** 52 47 16 **Longitude** -121 17 31
Location Cariboo Lake	Opening

Planting Unit
1
2

BCTS All Blocks
Block of Interest
Ecology Unit
Biogeoclimatic Zone

BCTS GPS Stations
GPS Station
Block Bdy Hub
Falling Corners
Reference Trees

BCTS Layout Points
Ecology Plot
Block Centre
Woody Debris
Landing Cable
Landing Ground
R/W Landing
Slump/Slide Area
Rock Outcrops
Cross Ditch
Arch Pipe
Arch Pipe, Proposed
Culvert
Culvert, Proposed
Bridge
Bridge, Proposed
Bridge, Condemned
Removed Structures
Gate
Road Barrier
Cattle Guard
Pipeline Crossing
Cave/ Den
Mineral Lick
Nest
Wildlife Tree
Wildlife Feature

BCTS Line Features
Fence Line
Other Trail
Pipe Line
Rec Trail
Seismic Line
Cliff
Draw
Embankment
Gully
Ridge
Slope Break
Cultural/Heritage Feature

BCTS Streams Class
Unknown
INT;NCD
S1;S2;S3;S4
S5;S6

BCTS Roads - Road State
Deactivated Road
Existing Road
Proposed Road
Unknown/NULL
Rehab Road

TRIM Features
River or Stream - Definite
River or Stream - Indefinite
Contour - Index
Contour - Intermediate
Road Permit
Forest Service Road
Highway/Main/Paved Road
Gravel/Resource Road
Trail
Snow Shed (Railway)
Tunnel
Bridge
Airstrip
Rail Line
Pipeline / Wellsite

CLA
WTP
WTRA
NP Permanent Access
Reserve
NP Immature
Area of Concern
Slope Area (>35%)
SAR Cliff
SAR Forested
SAR Rare Ecosystems
Special Mgmt Area
Tailing Pond
Lake/Watercourse
Marsh
Swamp
Private Land
Protected Areas/ Parks

Riparian Features
MFZ / MSZ
RMZ
RRZ

0 100 200 300 400 500 Meters

1:10,000

Date June 10, 2022 **User** JAMOORE
Template Name BlockPlantingMap_NFiscal_11x17L_v3
Coordinate System NAD 1983 UTM Zone 10N