Planting Map

BCTS
BC Timber Sales

TSL	Block ID
TA0638	3
Business Area: Cariboo-Chilcotin	UBI: BL8JK
Operating Area: Cariboo	Management Unit: Williams Lake
Gross Block Area: 29.34	NAR: 24.75
Min. Elev.: 1030 / Max. Elev.: 1120	Geographic Center — Latitude: 52 29 01 / Longitude: -121 01 18
Location: Hen Ingram Lake	Opening: 093A045-126

Planting Unit
1

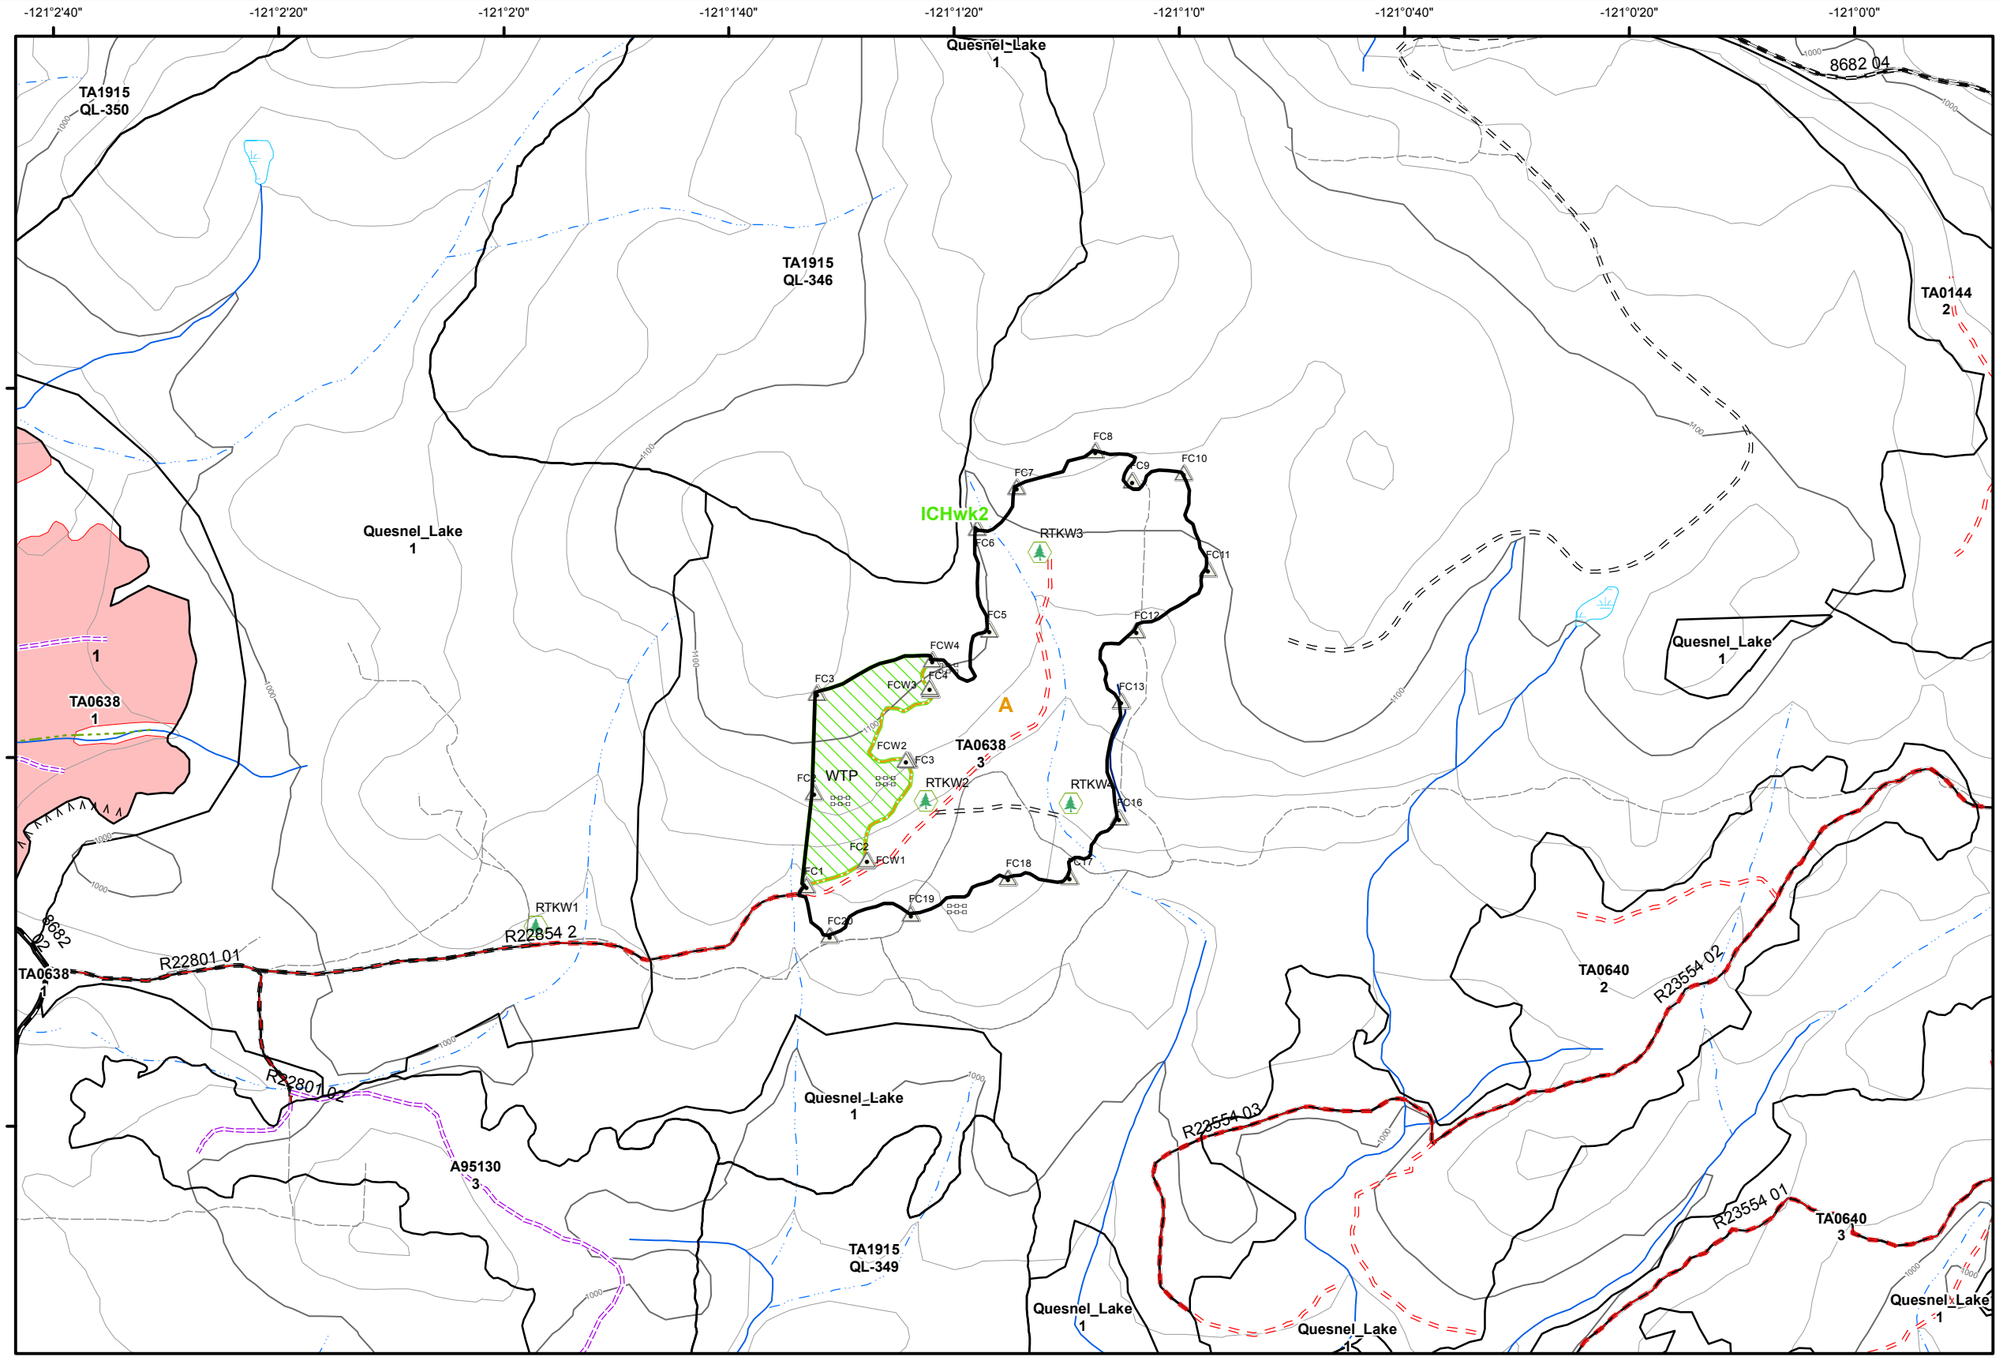

Planting Unit	Area (ha)	Status	Density (/ha)	Spacing (m) Target	Min	Max	Trees / Unit	Species Composition Detail *
1	45.25	Planned Planned	2000				49500	Cw-10-0+0-none-none-none-4950, Pli-10-0+0-none-none-none-4950, Sx-10-0+0-none-none-none-4950, Fdi-70-0+0-none-none-none-34650

*(Species - Species % - Stock Age - Stock Type - Request Key - Seedlot - # Trees/Species)

This block overlaps Migratory bird nest habitat (Rank 4). No mechanical activity May 20-July 21. For planting keep mechanical equipment such as quads moving and turned off as much as possible to avoid prolonged "sensory disturbance" of the nesting birds".

Access Instructions

From William's Lake, travel south on Highway 97 14.2 km to the Horsefly Road. Turn left onto the Horsefly Road and travel to Horsefly. At Clarke's General Store, turn right onto the Horsefly Lake Road and cross Horsefly River. Travel 1.3 km and turn left onto the Z Road. Continue for 32.4 km on Z Road and turn right onto 8682.02 FSR Road. Drive 5.5 km to the start of the block. Acess within block is available to a quad. updated May 2021 KS.

Comments

PU#1: Plant 70% Fdi PSB 412A, 10% Pli PSB 412A,10% Sx PSB 412A and 10% Cw 412A 1+0 spring stock). Plant to a target density of 2000 stems/ha with target spacing of 2.4 m and minimum spacing of 1.8 m for all planted conifers ignoring natural regeneration planting to dripline of residuals under 2.0 m. Use minimum spacing to ensure optimal microsites are utilized and to maintain target density. Plant spruce and cedar at the lower wetter portions of the block or in wet drainages. Plant only pine 1.0 m off either side of the access quad trail edge. Plant the burn piles. KS
Priorities: (1) Plant within 10 cm of existing stumps. (2) Plant within 2.0 m of existing residuals (over 2.0 m) with Fir.

BCTS All Blocks
Block of Interest
Ecology Unit
Biogeoclimatic Zone

BCTS GPS Stations
GPS Station
Block Bdy Hub
Falling Corners
Reference Trees

BCTS Layout Points
Ecology Plot
Block Centre
Woody Debris
Landing Cable
Landing Ground
R/W Landing
Slump/Slide Area
Rock Outcrops
Cross Ditch
Arch Pipe
Arch Pipe, Proposed
Culvert
Culvert, Proposed
Bridge
Bridge, Proposed
Bridge, Condemned
Removed Structures
Gate
Road Barrier
Cattle Guard
Pipeline Crossing
Cave/ Den
Mineral Lick
Nest
Wildlife Tree
Wildlife Feature

BCTS Line Features
Fence Line
Other Trail
Pipe Line
Rec Trail
Seismic Line
Cliff
Draw
Embankment
Gully
Ridge
Slope Break
Cultural/Heritage Feature

BCTS Streams Class
Unknown
INT;NCD
S1;S2;S3;S4
S5;S6

BCTS Roads - Road State
Deactivated Road
Existing Road
Proposed Road
Unknown/NULL
Rehab Road

TRIM Features
River or Stream - Definite
River or Stream - Indefinite
Contour - Index
Contour - Intermediate
Road Permit
Forest Service Road
Highway/Main/Paved Road
Gravel/Resource Road
Trail
Snow Shed (Railway)
Tunnel
Bridge
Airstrip
Rail Line
Pipeline / Wellsite

CLA
WTP
WTRA
NP Permanent Access
Reserve
NP Immature
Area of Concern
Slope Area (>35%)
SAR Cliff
SAR Forested
SAR Rare Ecosystems
Special Mgmt Area
Tailing Pond
Lake/Watercourse
Marsh
Swamp
Private Land
Protected Areas/ Parks

Riparian Features
MFZ / MSZ
RMZ
RRZ

0 100 200 300 400 500 Meters
1:10,000

Date June 22, 2022 **User** JAMOORE
Template Name BlockPlantingMap_NFiscal_11x17L_v3
Coordinate System NAD 1983 UTM Zone 10N