Road Overview Map Block VE116

Management Areas

- Riparian Stream Class-FISH:
  - S1, S2, S3, S4
  - Unknown
- Riparian Stream Class-NO FISH:
  - S5, S6
  - Unknown
- Non-classified Drainage
- Seepage
- Stream Class,Reach Break (S5 | S6)
- Riparian Lake (L1-L4)
- Riparian Wetland (W1-W5)
- Water Body ID # (AT)
- Retention Patch (Engineered)
- Retention Patch (Proposed)
- Dispersed Retention Trees
- Wildlife Tree Retention Area (WTRA)
- Adjacent Wildlife Tree Retention Area (WTRA)
- Road Right-of-Way
- Riparian Reserve Zone
- Riparian Management Zone (if different than SU prescription)
- Ground-Based Yarding Area
- Cable Yarding Area
- Helicopter Harvest Area
- Ground-Based Area >35% Slope
- Non-Productive
- Windthrow Management Area
- Machine Free Zone
- Park (Park)
- Previous Harvest (NSR | SR | GU)
- Old Growth Mgmt. Area

Harvest System

(Yarding Direction)

- Ground Based
- Skyline (SL)
- Grapple
- Harvest System Split Line
- Yarding Split Line

Field Marking

Falling Boundary: Orange FB Ribbon & Orange Paint
Retention Patch: Orange Black Stripe Ribbon & Orange Paint
Road Right of Way: Orange Ribbon & Orange Paint
Road Centre Line: Pink Ribbon & Pink Tag
Falling Corner: Orange Tag & FC # Marked
Dispersed Retention Trees Orange Painted Dot Each Side & Base
Station Marks White Ribbon
Fish Stream: Red White Stripe Ribbon
Non Fish Stream: Blue White Stripe Ribb.
Deflection Line: Green Ribbon
Machine Free Zone: Red Ribbon
Cruise Lines & Plots: Blue Ribbon

Culvert Summary

Road Number	Road Station	Culvert Type	Culvert Dimensions Diameter	Culvert Dimensions Length	Culvert Skew
VE1200	0+794	CMP	500	9	90
VE1200	0+929	CMP	500	9	90
VE1200	1+010	CMP	500	9	90
VE1200	1+086	CMP	500	8	90
VE1200	1+251	CMP	500	9	90
VE1200	1+569	CMP	500	10	90
VE1200	1+698	CMP	500	9	90
VE1200	1+867	CMP	500	9	90
VE1200	1+994	CMP	500	9	90
VE1200	2+107	CMP	500	9	90
VE1200	2+613	CMP	500	9	90
VE1220	0+006	CMP	500	11	40

Road Re-Construction Summary

Road Section	Length (km)
VE1200 (0+804 - 1+104 Case 1)	0.300
VE1200 (1+104 - 1+124 Case 2)	0.020
VE1200 (1+124 - 1+150 Case 1)	0.026
VE1200 (1+150 - 1+208 Case 2)	0.058
VE1200 (1+208 - 1+260 Case 1)	0.052
VE1200 (1+260 - 1+280 Case 2)	0.020
VE1200 (1+280 - 1+302 Case 1)	0.022
VE1200 (1+302 - 1+389 Case 2)	0.087
VE1200 (1+389 - 2+382 Case 1)	0.993
VE1200 (2+382 - 2+411 Case 2)	0.029
VE1200 (2+411 - 2+677 Case 1)	0.266
Total Roads	**1.873**

Road Construction Summary

Road Section	Length (km)
VE1220	0.167
Total Roads	**0.167**

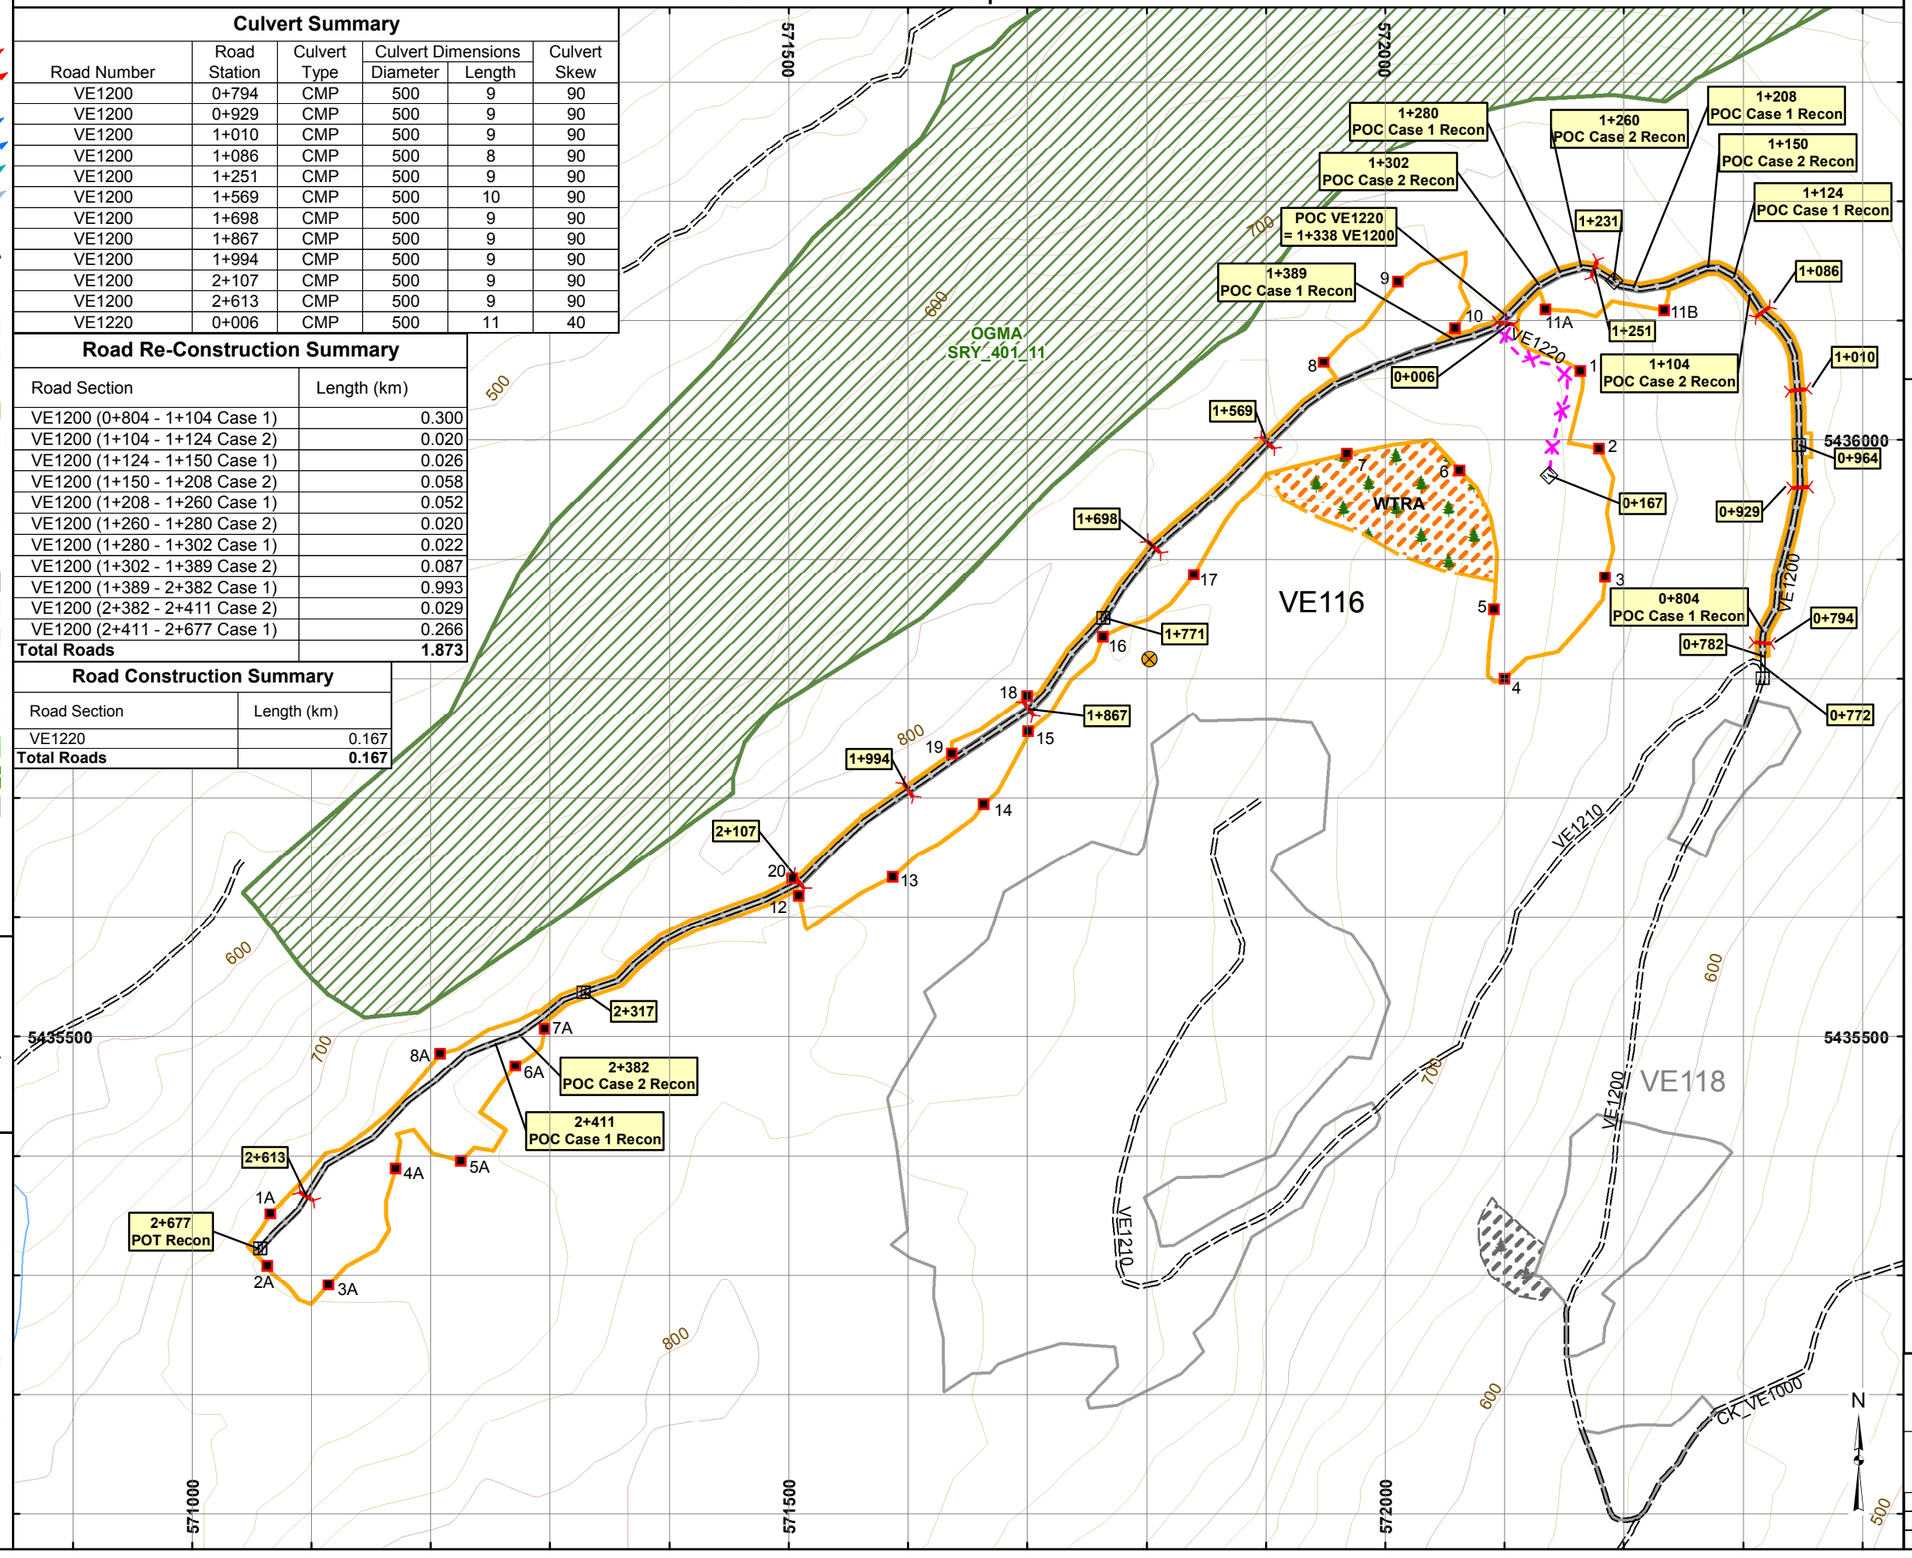

BCTS
BC Timber Sales
Chinook

TSL A92172

Scale:	1:5,000
Region:	RSC
District:	DCK
Mapsheet:	92G010
Location:	Vedder Mountain
UTM Zone:	10
UTM Easting:	571802
UTM Northing:	5435816
Latitude:	49°4'15.67" N
Longitude:	122°1'0.90" W
TAUP (ha):	10.4

Legend

- Total Area Under Prescription (TAUP):
  - Falling Boundary
  - External to Falling Bdy
- Falling Corner (2)
- SP Plot (3)
- Standard Unit Boundary
- Treatment Unit Boundary
- Existing Road
- Existing Trail
- Proposed Roads:
  - Haul Road
  - Designated Skid Trail
  - Temporary (Rehab)
  - Backspar Trail
- Road Chainage (0+200)
- Bridge (Existing)
- Bridge (Proposed)
- Culvert (Existing)
- Culvert (Proposed)
- Survey Route
- Unclassified Road
- Rock Outcrop Area
- Proposed / Designated Stream Crossing
- Gravel Pit (GP)
- Transmission Line
- Permanent Structures
- Slide
- Gully
- Rock Outcrop
- Windfall/Snag (S)
- Marsh/Swamp
- Index Contour and Label (100)
- Intermediate Contour (Contour Interval is 20m)
- Landing/Temporary Landing
- Dryland Sort/Water Sort (DS | WS)
- Log Dump/Helipad (LD | H)
- Helicopter Drop Zone (DZ)
- Quarry (Qu)
- Geographic Centre

25m 0 25 50 100 150m

Scale: 1:5,000

Digital Mapping by:
CHARTWELL Consultants Ltd.

Project Number:	15-535
Drawn By:	JA / MC
Date:	2016-02-23