

Woodlot for Windows 4.4

User Guide



Ministry of Forests, Lands, Natural Resource Operations and Rural
Development

And

The Federation of British Columbia Woodlot Associations

April 30, 2019



Ministry of
Forests, Lands, Natural
Resource Operations
and Rural Development



Prepared by:

Enfor Consultants Ltd.
#118-3721 Delbrook Avenue
North Vancouver, BC
Canada V7N 3Z4
www.enfor.com



User Guide Revision History

Date	User Guide Version	Description	Author
September 5, 2013	4.0.0	Initial version of the user guide	M. Greig, Enfor Consultants Ltd.
July 25, 2014	4.1.0	Updated for Woodlot 4.1 software updates	M. Greig, T. Bradley
September 23, 2016	4.2	Updated for Woodlot 4.2 software updates and general usability updates	M. Greig, Enfor Consultants Ltd.
April 30, 2019	4.4	Updated for Woodlot 4.3 and Woodlot 4.4 software updates and general usability updates	M. Greig, Enfor Consultants Ltd.



Table of Contents

User Guide Revision History	i
Table of Contents.....	ii
Acknowledgements	v
What's New in Woodlot 4	vi
1. Introduction.....	1
1.1 User Support	2
2. Installation of Woodlot for Windows Software	3
2.1 BC Government Users	3
2.2 Industry and Non-Government Users.....	3
2.4 Software Requirements	5
2.5 Forward Compatible Files	5
3. Software Components.....	6
3.1 Updating Woodlot for Windows	6
4. Woodlot Overview	7
4.05 Caution - Woodlot 4 and Legacy Data	7
4.1 Woodlot 4 Windows and Tabs.....	8
4.2 Sequence of Work in Woodlot 4	11
4.3 Basic Functionality and Workspace	12
4.4 Menu Items.....	13
4.4.1 File	13
4.4.2 Edit.....	14
4.4.3 View	15
4.4.4 Reports and Graphs	15
4.4.5 Help	15
4.5 Toolbars	16
4.6 Importing Shapefiles – Import (shp)	17
4.6.1 Scenarios for Merging Spatial Data and Tabular Data	19
4.6.2 Shapefile Import Updates in Woodlot 4	20
4.6.2.1 Importing.....	20
4.6.2.2 Classifiers	20
4.6.2.3 Use Classifiers.....	20
4.6.2.4 Overwrite	20
4.7 Downloading Data from DataBC for Import Into Woodlot 4.....	21
4.8 Growth and Yield Models Used in Woodlot 4.....	22
4.9 Silviculture Systems and Yields used – Clearcut & Partial Cut	23
4.10 File Types used in Woodlot 4	24
5. The About Screen	26
6. Project Tab	27
6.1 Project Information and Default Parameters	28
6.1.1 Setting Project Defaults	29
6.2 Description	30
6.3 Harvest Parameter Defaults	30



6.4 Partial Cut Defaults	30
6.5 TIPSy Defaults	31
6.6 Tree Species	33
6.7 Utilization Levels	35
6.8 Linkage to existing Resultants (polygons) via	36
6.9 Stands with more than one Resultant	37
7. Polygon View Tab	38
7.1 Conventions Used in Polygon View	39
7.2 Polygon View Toolbar and Displays	39
7.2.1 Information Displays – Small Map, Comments, VRI, Yield Graphs	40
7.3 Navigation Tree	42
7.4 Summary	43
7.5 Area	44
7.6 Classifiers	45
7.7 BEC Zone	46
7.8 Small Map	46
7.9 Existing Forest	47
7.9.1 Silviculture System	47
7.9.2 Forest Polygon Information	49
7.9.3 Calculate Site Index	50
7.9.4 Yield Type and Yield Settings	51
VDYP Yields	52
TIPSy Yields	54
NC – Non Commercial Cover	55
NSR – Not Satisfactorily Restocked	55
Custom Yield	56
7.9.5 Convert Dead Stands to Non-Commercial Stands	58
7.9.6 Yield Curves and Yield Tables	61
7.10 Reforest	62
7.11 Imported Lot File Yields	64
7.12 Calculating Yields	65
7.12.1 Recalculating Yields	65
7.12.2 Recalculating Imported Lot File Yields	66
7.12.2 Recalculating TIPSy Yields with New Utilization Parameters	66
7.13 Stands vs Resultants	67
8. Tabular View Tab	68
8.1 Column Filter	71
8.2 Row Filter	73
9. Map View Tab	76
9.1 Navigating the Map	77
9.2 Map Toolbar	78
9.3 Automatic Label Order	79
10. Calculations Tab	80
10.1 Harvest Priority	81
10.2 Harvest Order	83
10.3 Constraints	83
10.3.1 Adding and Editing Constraints	85
10.3.2 Types of Constraints	86



10.4 Calculate AAC	88
10.4.1 Automatic Calculations	89
10.4.2 Manual Calculations, Testing Harvest Rates (and Implications)	89
10.4.3 LRSY and MAI	92
10.5 Harvest Schedule Panel	93
10.5.1 Harvest Schedule Reports	94
10.6 Standing Volume/Time Graph	96
11. Reports and Graphs	99
11.1 Woodlot Report	100
11.2 Graphs	101
12. Other Improvements to Woodlot	107
13. For More Information	108
Appendix 1 Silviculture Systems in Woodlot	109
Clearcut	109
Partial Cut (Average Age Method)	110
Appendix 2 Managed or Natural Stands	113
Appendix 3 VDYP vs TIPSy	118
Appendix 4 Tree Species Used in Woodlot 4	119
Appendix 5 Import/Export Variables used in Woodlot 4	122
Appendix 6 Some Basic Steps to Use Woodlot 4	128
Getting Acquainted	128
Key Features of Woodlot	130
How Woodlot Calculates the Harvest Rate	132
Summary of Basic Steps to Use Woodlot	133
Some Woodlot for Windows Tips and Tricks	134
Appendix 7 Sample Woodlot report	135
Appendix 8 VRI Variables Used in Woodlot 4	140
Appendix 9 Woodlot for Windows What's New ?	145



Acknowledgements

The assistance, ideas and cooperation of the following are gratefully acknowledged:

- Emma Neil, RPF, Forest Tenures Branch, FLNROD
- Dave Haley, RPF, Forest Tenures Branch, FLNROD
- Peter Graff, RPF, Forest Tenures Branch, FLNROD
- Brian McNaughton RPF, Federation
- Tom Bradley, RFT, Federation
- Jerry Benner, RPF, Federation
- Bruce Bell, Information Management Branch, FLNROD
- Ricky Yee, Information Management Branch, FLNROD
- Sam Otukol, PhD, RPF, Forest Analysis and Inventory Branch, FLNROD
- Mario Di Lucca, RPF, Forest Analysis and Inventory Branch, FLNROD
- Barry Snowden, RPF, Forest Analysis and Inventory Branch, FLNROD
- Dave Waddell, RPF, Forest Analysis and Inventory Branch, FLNROD
- Woodlot Licence and timber supply staff in Forest Regions and Districts
- Wolfram Wollenheit, RPF, Econ Consulting.
- John Illes, RPF, Donna Brochez, RFT, Neal Marincak, RFT, Cya Solecki, RPF, Nadina Resource District
- Geoffrey Klassen, RPF, Forest Tenures Branch, FLNROD
- Peter Lewis, RPF, FLNROD, Nelson
- Ted Traer, RPF, FLNROD
- Steve Henderson, RPF, FLNROD
- Doug Beckett, RPF, FLNROD
- Stephanie Mooney, RPF, FLNROD
- Alison Patch, RPF, woodlot owner and consultant
- Mike Bandstra, RPF, consultant
- Richard Kyle, Enfor Consultants Ltd.
- Mike Greig RPF, P.Eng, Enfor Consultants Ltd.



What's New in Woodlot 4

Woodlot for Windows (Woodlot) is a timber supply analysis software program used for woodlots and small woodlands in BC.

Woodlot 4 was developed in 2013 as a reprogramming project utilizing the best features of Woodlot 3.2. It provides an updated interface and programming language, adds important timber supply modeling upgrades and provides for future expansion. Since then the following updates have been made:

- Updated to Woodlot 4.1 in March 2014. Powerful new analysis features were added in the Polygon View, Tabular View, Map View, as well as general enhancements and the User Guide update in response to needs identified by Ministry staff and woodlot owners.
- Updated to Woodlot 4.2 in March 2016. The update added the latest versions of TIPSYP and VDYP7 yield functions, updated graphing features, provided a new shapefile import feature and provided general improvements to other features in the software.
- Updated to Woodlot 4.3 in July 2018. Updates included updating Growth and Yield models, Column filtering, LRSY and MAI displayed on the Calculate AAC panel, improvements on setting project default parameters, adding more graphs, updating the report, map features and other improvements. Refer to the “What’s New? Woodlot for Windows 4.3” included in the Help menu.
- Updated to Woodlot 4.4 in April 2019. Updates included adding more report screen toggles in the Harvest Schedule heading, updates to Shapefile importing, updates to the Map toolbar, updates for Stands vs Resultants and other improvements. Refer to the “What’s New? Woodlot for Windows 4.4” included in the Help menu.

The objectives in developing Woodlot 4 were to:

- Update the software platform to run on current Windows based operating systems and to take advantage of current technology used in timber supply.
- Incorporate VDYP7 and TIPSYP 4.3, the latest timber growth and yield functions.
- Provide usability upgrades identified in a 2012 study (e.g. remove area and polygon limits, import custom yield tables, partial cutting methods, etc.)
- Maintain the general workflow, concepts and interface as much as possible; not a “re-think”.
- Allow for upgrades to meet future needs (e.g. mapping).

Refer to Appendix 9 “Woodlot for Windows What’s New” for a synopsis of updates. Some new or improved features of Woodlot 4 include:

- Runs on Windows 7 & 8 operating systems; compatible with Windows XP. Woodlot 4 is programmed in VB.Net and compatible with framework 4.0.
- Removed upper limits for number of polygons and maximum area.
- Incorporates VDYP7 and TIPSYP 4.3.
- Updated interface, navigating with tabs.
- Import Woodlot 3.2 “.lot” files.
- Import VRI data and shp files directly.
- Project tab, which is now used to adjust default values.
- Polygon View tab, which is an updated version of Polygon Data.
- Users can sort polygons.



- New Map View (partially interactive) tab to display a map if the user imports a shp file.
- Uses VRI data or FIP data.
- Partial cutting: scoped out new method (multi-age) + current method (lowered even age).
- Import custom yield tables.
- Improved harvest sort order; improved constraints; improved harvest flow calculations.
- Graphing upgraded to use FLNROD's "Plotsy", which provides expanded features.
- Updated Woodlot Harvest Report.
- New User Guide.



1. Introduction

Woodlot for Windows (Woodlot) is a timber supply software program used to calculate harvest rates on Woodlot Licences in BC's Woodlot Licence Program. For industry users, the software and user guide are available at no charge from the Ministry of Forests, Lands and Natural Resource Operations (FLNROD) website. For Ministry staff, the software is no longer available on a Citrix server.

Woodlot was originally developed in 1996 and has undergone a number of updates since then. The previous update of Woodlot, Version 3.2, was created in 2007.

Woodlot 4 was developed and released in August 2013. FLNROD and Federation of BC Woodlot Associations (Federation) undertook the project jointly. The objectives in developing Woodlot 4 were to ensure it would meet current and anticipated timber supply needs on woodlots, to run on current operating systems, and to take advantage of the latest inventory and timber supply technology. The project included reprogramming Woodlot using a newer programming language (VB.Net) to avoid software redundancy issues.

Woodlot 4 was updated to Woodlot version 4.1 in March 2014 and to Woodlot version 4.2 in March 2016, Woodlot version 4.3 in July 2018 and Woodlot version 4.4 in April 2019. Updates added powerful new analysis features in the Polygon View, Tabular View, Map View, as well as general enhancements and the User Guide update in response to needs identified by Ministry staff and woodlot owners.

All information, timber growth and yields, mapping conventions and formats are applicable to forests in British Columbia, Canada.

This user guide is organized as follows:

- What's New in Woodlot 4
- Installation of Woodlot software
- Software components
- Description of key features in Woodlot 4
- Appendices with information for users

For more information, please contact:

Ministry of Forests, Lands, Natural Resource
Operations and Rural Development, Forest
Tenures Branch
Victoria, BC, V8W 9C2

Website:
<https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool>

Federation of BC Woodlot Associations
Brian McNaughton, General Manager
381 Pheasant Road
Williams Lake, BC, V2G 5A9

Tel: 1- 866-345-8733
Email: gen_manager@woodlot.bc.ca
Website: <https://woodlot.bc.ca/>



1.1 User Support

Woodlot licensees may contact the following for user support questions:

Mike Bandstra, RPF
Email: mbandstra@forsite.ca
Tel: (250) 847-4822.

Ministry staff and other users may contact the following for user support questions:

For Woodlot usability support questions, please call Resource Tenures Branch, Victoria.

For Woodlot timber supply analysis questions:

Doug Beckett, RPF
Forest Analysis Section,
Ministry of Forests, Lands, Natural Resource Operations and Rural Development
Prince George
Email: Doug.Beckett@gov.bc.ca
Tel: (250) 565-6265



2. Installation of Woodlot for Windows Software

This chapter describes the installation of Woodlot for Windows 4 and all later versions of Woodlot for Windows software.

Woodlot for Windows software is available at no charge as follows.

2.1 BC Government Users

For Government users, Woodlot for Windows software, version 4.2 and later, can be downloaded and installed from the website listed under **2.2 Industry and Non-Government Users**. Woodlot 4.2 is not available on the Citrix server.

2.2 Industry and Non-Government Users

Woodlot for Windows software is available for download and install from the Ministry of Forests, Lands, Natural Resource Operations and Rural Development Woodlot for Windows AAC Program webpage located at: <https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool>

Allowable Annual Cut Calculator Tool - Woodlot for Windows

Woodlot for Windows is used to calculate harvest rates on woodlot licences, community forest agreements, and first nations woodland licences in B.C. The software and user guide are available at no charge.

Woodlot for Windows 4.3 (Current Version)

- Install Woodlot 4.3
- Instructions for downloading VRI data
- Woodlot 4.3 User's Manual

Woodlot for Windows Training Videos

Module	Topic
Introduction (05:00, 2:00) (6 minutes)	Introduction to training modules
Module 1 (05:00, 2:00) (22 minutes)	Overview of features, layout and flow of Woodlot 4 - Comparison to Woodlot 3
Module 2a (05:00, 1:00) (8 minutes)	Importing VRI data (Lupin) - Viewing the VRI data - Mapping features in Woodlot 4
Module 2b (05:00, 2:30) (6 minutes)	Downloading VRI data from the LRDM - Importing data from the LRDM - Data Distribution Services
Module 3 (05:00, 8:00) (13 minutes)	Importing Data (Lupin & Jut) - Differences between Woodlot 3 vs Woodlot 4 - Entering future stand information - Importing partial files to update polygons - VRI not imported via VRI
Module 4 (05:00, 2:00) (7 minutes)	Importing Woodlot 3 file (Lupin) - Updating Yields with VDFP 4.3 and TDFP 7 - Adjusting the sort order - AAC calculations differences
Module 5 (05:00, 1:30) (12 minutes)	Yield and Silviculture Systems - VDFP, TDFP - Clearcut, Partial Cut, Reforest - Species, Utilization, Defaults - Importing custom yields
Module 6 (05:00, 1:30) (13 minutes)	Calculation results and reports - Harvest priority and order - Calculation settings - Woodlot graphs - Woodlot reports
Module 7 (05:00, 6:30) (14 minutes)	Classifiers and constraints - Creating a classifier - Importing classifiers using VRI and CSV - Applying constraints to a classifier

Disclaimer

The harvest levels forecast by the woodlot calculator tool are only one source of information considered in determining an allowable annual cut. The Ministry of Forests, Lands, Natural Resource Operations and Rural Development does not warrant that any of the harvest levels forecast by the woodlot calculator will be the same as the allowable annual cut determined by a decision-maker. Users are requested to visit this site often to seek the latest version of the program as The Ministry of Forests, Lands, Natural Resource Operations and Rural Development is not responsible to provide users with notification when the program is updated.



Please select the version and applications you wish to download from the menu items provided. Follow the prompts to have Woodlot self-install in your computer.

Users are advised to check the FLNROD Woodlot website regularly for updates and the latest version of Woodlot for Windows.

Note: The Woodlot 4 install will check that your computer has the correct version of Microsoft .Net framework. Woodlot requires the .Net framework version 4; most systems have this already. If you do not have the latest version, a free upgrade is available as follows:

- If you have the correct version of the .Net framework, Woodlot will continue to install on your computer.
- If you require an upgrade to .Net framework version 4, you will be prompted. An updating feature will activate for your convenience, connecting you to the Microsoft website for the update. Please follow the self-updating steps provided. You will be able to continue installing Woodlot after updating the .Net framework.

If you require an upgrade to .Net framework version 4 but do not have a fast internet connection for an update, a copy of the .Net update is available from the FLNROD Woodlot website as a .Net framework redistributable file. The file name is dotNetFx40_Full_x86_x64.exe. Woodlot licensees can contact the Federation User Support (see above) for a CD copy and assistance.

2.3 Computer System Requirements

Any computer capable of running Windows should run Woodlot 4. You will require:

Hard Drive space: 150MB free storage space

Operating Systems: Windows XP, Windows Vista, Windows 7, Windows 8+

Microsoft .Net Framework: version 4.0

(Note: if the Microsoft .Net framework version 4.0 is not available on your system, you can upgrade at no cost by navigating to <https://www.microsoft.com/en-ca/download/details.aspx?id=17851> to install the upgrade, or see your system administrator.)

Woodlot operates on 32-bit operating systems and therefore will not run on Windows 3.1 or older operating systems (16-bit). (For this same reason, Woodlot 4 does not use older versions of VDYP, such as VDYP6 used in Woodlot 3.)

Sample files are generally stored in **C:\Program Files (x86)\Woodlot for Windows 4\Sample**



2.4 Software Requirements

Woodlot comes with most of the software required to run timber supply calculations and create reports. This includes the parent Woodlot 4 application, and its dependent applications VDYP7, TIPS4.3, and Plotsy (refer to Section 3).

Other software packages that are not provided with Woodlot but are recommended for preparing data, formatting reports and printing include:

Word Processing:	Word for Windows for final formatting of your woodlot timber supply reports.
Spreadsheet:	Excel for creating and/or editing CSV data files, which can be imported into Woodlot.
GIS:	ArcMap or similar mapping software for assembling and preparing VRI inventory data and .shp graphics files and/or CSV files, which can be imported into Woodlot.

Note: Woodlot for Windows Version 3 and Version 4x can be installed on the same computer. This can be useful during transition work to move old data files to Version 4.

2.5 Forward Compatible Files

Files created in Woodlot 4 are forward compatible and can be used in Woodlot 4.0 or later versions. They will not run in Woodlot 3.1.

The Woodlot 4.1 update in 2014 resulted in several changes to the file formats, and so files created in Woodlot 4.1 may only be used in Woodlot 4.1, 4.2, or later versions.


If you have any questions about compatibility, check with your Woodlot support contact.



3. Software Components

This chapter describes the main software components in Woodlot 4.

Woodlot 4.4 incorporates the following suite of timber supply software components, each being the most recent version available in 2016. Software version numbers are provided on the About screen. Please refer to the About screen (located in the Help menu or when you start Woodlot) for the latest version numbers in use.



Supporting Software used in Woodlot 4.4	Functionality in Woodlot 4
Woodlot 4.4	The parent application used for timber supply analysis.
VDYP7 Console: 7.14b:7.14.2.61	Used to predict timber yields for natural (unmanaged) stands and for partially cut stands.
BatchTIPSY: 4.4.2.0	Used to predict timber yields for managed stands.
Plotsy: 1.28.0.0	Used to generate reference heights for a given reference age and site index.
Sindex: 1.52	Used to graph results.

All software is owned and managed by the Ministry of Forests, Lands and Natural Resource Operations.

The Woodlot 4.4 Help feature includes information on both VDYP7 and TIPSY 4.3. For more information on VDYP, TIPSY, Sindex and Plotsy please contact the Forest Analysis and Inventory Branch and Appendix 3.

3.1 Updating Woodlot for Windows

From time to time, it may be necessary for FLNROD to update Woodlot for Windows or its dependent software VDYP7, TIPSY4.3, Sindex and Plotsy. The FLNROD is responsible for software updates. If there is an update posted, you should update Woodlot for Windows on your computer.

Please check the Woodlot for Windows AAC Program website located at <https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool> Searching for “Woodlot for Windows” will find an appropriate web link to the software. If you have a different version, then you should uninstall your program and re-install the latest version of software from this webpage.



4. Woodlot Overview

This chapter provides an overview of main features in Woodlot 4.

Woodlot 4 is a timber supply analysis program for use on woodlots and small woodlands in BC. In addition, Woodlot 4 now includes the ability to determine harvest rates on larger forest tenures such as Community Forest Agreements and First Nations Woodland Licences. It uses the timber inventory and timber management information you provide, estimates the growth and yield on your woodlot, and calculates the best possible sustainable harvest rate for the planning period. Woodlot calculates a non-declining even flow (flat-line) harvest rate over a 250-year planning horizon.

Woodlot 4 retains the same general workflow as Woodlot 3.2, while taking advantage of the latest technologies, data sources and timber yield functions. User-friendly features have been provided to assist you with your analysis.

Like any software program, the results are as good as the information that you provide. You will be rewarded if you are diligent in preparing complete and accurate data.

Experienced users may wish to skip to Appendix 6, which provides a summary of the steps to using Woodlot 4, Getting Acquainted with Woodlot 4, Key Features, How Woodlot Calculates the Harvest Rate and Tips and Tricks.

4.05 Caution - Woodlot 4 and Legacy Data

If you are using data imported from an earlier version of Woodlot in Woodlot 4, (i.e. older lot files or csv files), please be advised that you will need to review and likely adjust the crown closure values in the imported data prior to recalculating the yields in Woodlot 4.

Earlier versions of Woodlot used VDYP 6, which uses estimated crown closure at rotation age to predict stand volumes. The crown closure data required in the old lot or csv file was intended to be measured or estimated crown closure at rotation age.

Woodlot 4 uses the VDYP 7 FIPSTART method to predict stand volumes when using old format data. This method requires crown closure at stand reference age, which is generally crown closure at current stand age. (See Section 7.9.3 for more details.)

The difference in crown closure values and in resulting predicted VDYP 7 yield will be small for older stands near rotation age, but can be very significant for younger stands.



The user should be prepared to document and support any required changes to crown closure values on a polygon by polygon basis, and expect to provide a rationale supporting the revised values in their Management Plan.

Note: Woodlot 4 will import the VDYP 6 yield predictions when you import an old version lot file, and will use the VDYP 6 yield predictions to calculate an AAC until such time as the user explicitly chooses to overwrite the VDYP6 values with VDYP7 values. Woodlot 4 does not import the VDYP 6 yield predictions when you import an old version csv file.



4.1 Woodlot 4 Windows and Tabs

There are six main work areas in Woodlot that you navigate to using the tabs at the top of the workspace. Each operates with sub-windows of information and data summarized below and discussed in the following Sections.

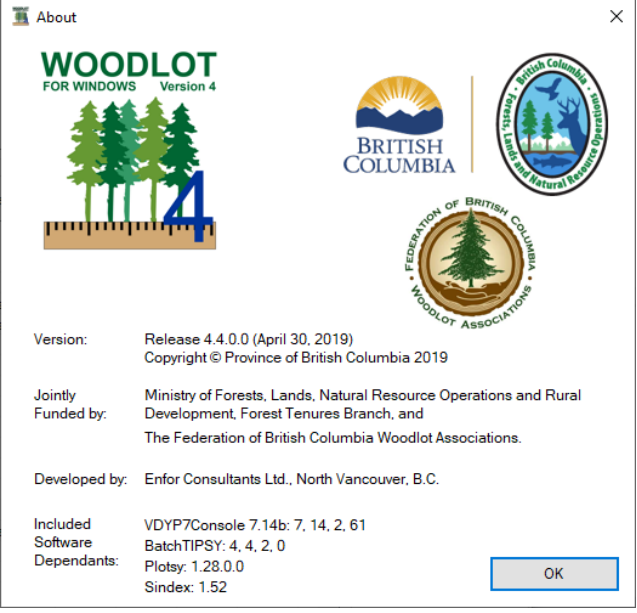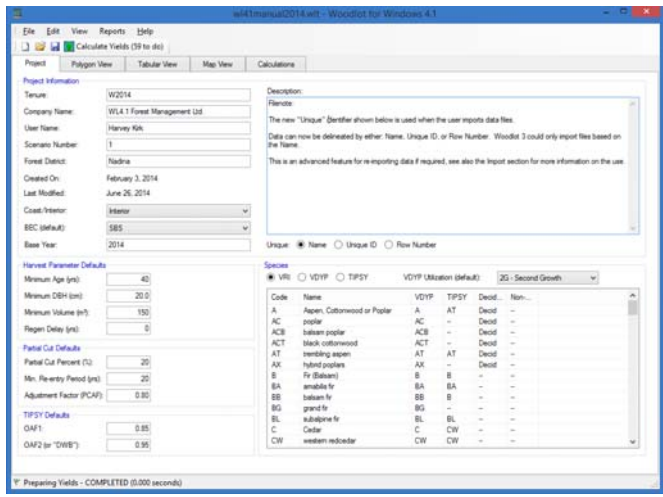Window or Tab	Title	What it does
	About Screen	<p>The About screen shows the version and date of Woodlot 4. Use this information to verify that you are using the most up to date version of Woodlot before completing the final runs for your Management Plan.</p> <p>The screen also includes information on the versions of VDYP7, TIPSYP 4.3 and Plotsy used in Woodlot 4</p>
	Project Tab	<p>The Project tab is used to enter basic woodlot project information and to adjust default analysis settings.</p> <p>These include default Harvest Parameters, Partial Cut defaults, TIPSYP defaults, etc.</p> <p>You can view the species and utilization levels used in VRI, VDYP and TIPSYP.</p>




The Polygon View tab is used to manage the forest inventory data and management assumptions specific to each forest polygon and to calculate yields.

The polygon view tab can be used to directly enter inventory information about a forest type, or the information can be prepared outside of Woodlot and imported into the program. As a general rule, it is more efficient to prepare the data outside of Woodlot in a GIS system and/or spreadsheet or data manager and import the results into woodlot.

Polygon View

Preparing the data in a GIS system allows you to import a SHP file set which enables the mapping tools within Woodlot 4. Woodlot for Windows lets you also link the SHP file set with data prepared in a spreadsheet. This is the most important data screen in Woodlot 4 as your final calculations are only as good as your input data. You should spend an appropriate amount of time collecting and ensuring this screen is filled correctly.

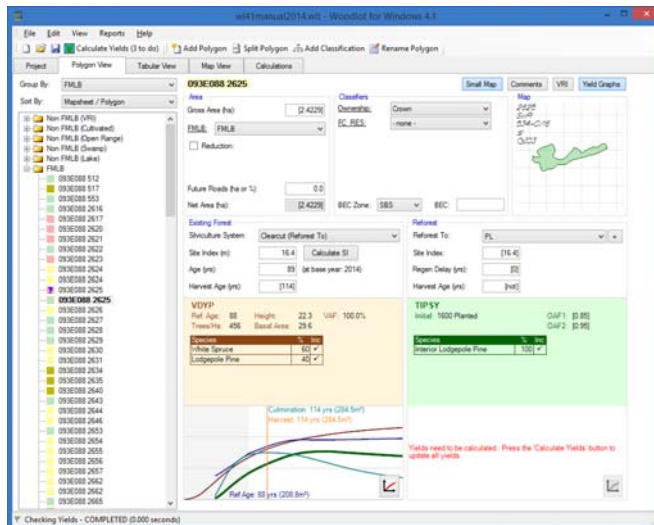

The Tabular View tab is used to display basic polygon information for a quick check, and to edit your polygon data in a tabular format.


Polygon data can be filtered to display the data in a variety of ways.

Tabular View

If you change any timber yield data in the Tabular View, such as Silviculture System, the polygon icon will change to "2" and you will need to re-calculate the yield for those polygons when you return to the Polygon View.

Polygon	Icon	Net Area (ha)	Current Age (yr)	Site Index (m)	Yield Method	Harvest Age (yr)	Volume at Harvest (m³/ha)	Net at Harvest (m³/ha/yr)	Silviculture System	Site Index (m) - Rotation (yr)
090308 8496116		(20.2412)	250	13.1	VOYIP	(143)	403.8	2.82	CC NoChange	
090308 116		(21.4334)	63	27.6	VOYIP	(86)	729.4	8.48	CC NoChange	
090308 8608343		(18.6957)	58	28.0	VOYIP	(84)	679.9	8.09	CC NoChange	
090308 8708131		(19.2238)	11	26.9	VOYIP	(88)	488.1	5.27	CC NoChange	
090308 130		(1.8962)	260	12.0	VOYIP	(141)	265.0	1.88	CC NoChange	
090308 131		(8.1624)	250	15.8	VOYIP	(133)	529.5	4.91	CC Reforest	(15.8)
090308 114		(11.4733)	52	28.0	VOYIP	(86)	682.8	8.06	CC Reforest	(28.0)
090308 117		(2.2446)	290	12.0	VOYIP	(141)	271.3	1.92	CC Reforest	(12.0)
090308 8708209		(1.8842)	260	16.9	VOYIP	(128)	426.7	5.18	CC Reforest	(16.9)
090308 279		(1.0618)	21	22.0	VOYIP	(133)	634.1	6.30	CC NoChange	
090308 3023		(2.4211)	53	31.4	VOYIP	(76)	826.4	10.87	CC NoChange	
090308 286		(2.498)	324	17.2	VOYIP	(126)	752.8	5.94	CC NoChange	
090308 8962674		(4.5176)	127	28.0	VOYIP	(108)	543.1	4.98	CC NoChange	
090308 120		(8.2891)	60	30.7	VOYIP	(78)	819.3	10.32	CC NoChange	
090308 113		(12.5418)	53	28.0	VOYIP	(85)	667.0	8.34	CC NoChange	
090308 119		(12.104)	58	28.0	VOYIP	(85)	688.2	7.18	CC NoChange	
090308 110		(2.2138)	180	16.2	VOYIP	(133)	458.7	3.87	CC NoChange	
090308 112		(3.464)	65	27.2	VOYIP	(81)	620.5	10.17	CC NoChange	
090308 8637090		(6.1332)	367	21.4	VOYIP	(101)	682.1	6.47	CC NoChange	
090308 175		(5.458)	260	11.2	VOYIP	(146)	308.0	2.11	CC NoChange	
090308 8671628		(44.8732)	120	21.3	VOYIP	(108)	594.0	5.60	CC NoChange	
090308 163		(8.6281)	53	31.4	VOYIP	(76)	826.4	10.87	CC NoChange	
090308 167		(18.9354)	120	22.1	VOYIP	(85)	362.4	5.62	CC NoChange	




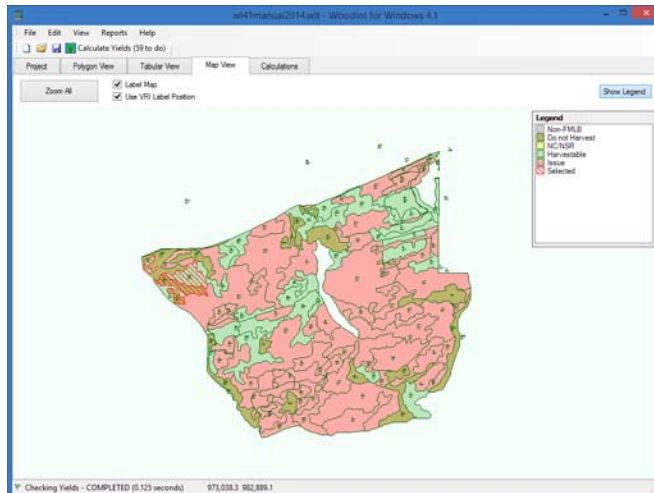

Map View

The Map View tab can display a map of your forest inventory data if you import a shapefile. You are required to load a map shp file to display in the Map View, otherwise this tab display will be blank.

Note that Map view can display a map for use with a Woodlot 3.2 *.lot file if you import a *.shp file of spatial information that you can then link to the Woodlot 3.2 data.

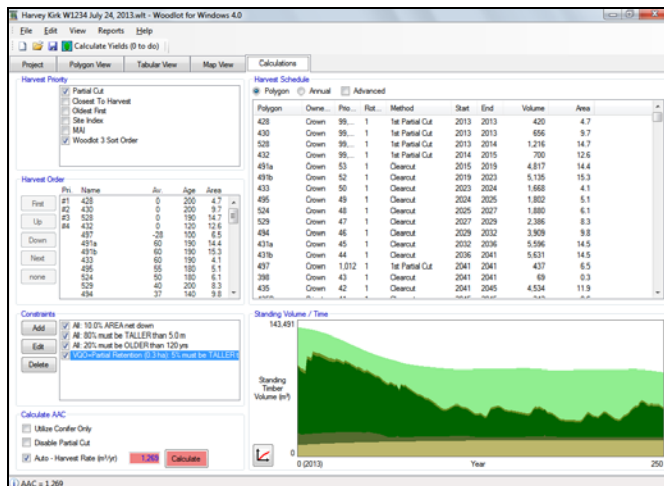

Calculations

The Calculations tab is used to conduct harvest rate calculations. A non-declining even flow harvest rate is calculated over the 250-year planning horizon.

In this screen you can set the harvest priority, harvest order, constraints, and calculate the AAC.

You can view results in the harvest schedule section and produce graphs. Graphs are generated in the FLNROD plotting module Plotsy.



4.2 Sequence of Work in Woodlot 4

The general sequence of timber supply work in Woodlot 4 is suggested as follows:

- For a new woodlot calculation, or to use new inventory data on an existing woodlot, you will need to identify your woodlot area and assemble the forest inventory for your woodlot. VRI data for most woodlots is available from FLNROD via DataBC (refer to Section 4.7). However, woodlot specific inventories are no longer added to the provincial VRI data set. The user should ascertain whether the VRI data is the most recent inventory data for the woodlot, and/or if updating for recent disturbance is required. If you are not familiar with GIS applications or access to on-line spatial data, you should contact a GIS forester to arrange for the data file.

You will need to identify sustainable forest management assumptions including any constraints on timber supply. Use “Classifiers” to do this when you prepare your data.

For details on constraints commonly used in your Timber Supply Area (TSA), refer to the Timber Supply Review for the TSA adjacent to your woodlot from this website:

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/timber-supply-review-and-allowable-annual-cut>

- For updating an existing woodlot calculation, you will need your Woodlot 3.2 lot file, the updates if any to your forest inventory, and updates if any to your forest management assumptions.

Most users will want to import their data into Woodlot, although you can also manually enter your data. To import, prepare a CSV file or SHP file based on the parameters described in the following sections of this guide.

Alternatively, import your old .lot file and update it manually once in Woodlot 4. Carefully review the data you have imported, looking for missing data items or mistakes.

Data from Woodlot 3.2, regardless of import format used, will be missing some key information: basal area, stems per hectare, and Biogeoclimatic zone. You can edit flawed or incomplete data in the Project View tab and Polygon View tab in Woodlot, or edit the source data and import it again.

- Growth and Yield. For new woodlot projects, Woodlot 4 will generate yields from VDYP7 or TIPSYS 4.3 based on growth and yield assumptions for each of your forest polygons. Click the Calculate Yields menu item to generate new or updated yields.

Alternatively, you can import and use a custom yield curve using the features in Existing Forest or Reforest, under the “Yield Settings” window, which is activated by clicking on the yield type section.

When you import data created in Woodlot 3.2, Woodlot 4 will load the existing yield information from your old lot file and will use this yield information to run your harvest calculations. To update the old yields using the new VDYP7 and TIPSYS 4.3, you can either open the “Yield Settings” window for a specific polygon and uncheck the “Imported from Lot File” checkbox, or use the “Edit”, “Remove all “Imported .LOT Yields” tool.

- Timber supply constraints. You can reflect constraints on your timber supply for non-timber management uses of your woodlot. Typically, these might include area reductions for future roads or timber reserves, forest cover age or height requirements for wildlife, environmental or social concerns (e.g. Visual Quality). Use the Constraints section on the Calculation screen to




select these. You can also add an area netdown and a road netdown for each polygon on the Polygon View tab if required.

- Calculate non-declining even flow harvest rate over a 250-year planning horizon. From the Calculations tab, select your harvest priority, harvest order and constraints. Click on "Calculate" to generate your harvest rate. This will create a harvest schedule with details of the calculation, and the green Standing Volume/Time graph. You can test your harvest rate by adjusting the priority and order, or by forcing a higher or lower harvest rate.
- Produce woodlot harvest planning report. From the main menu, select Reports, "Woodlot Report" and one of the graphs. This will provide you key details on your calculated harvest rate.

4.3 Basic Functionality and Workspace


Woodlot 4 is a Windows based application with standard conventions and functionality, including:

- Menu (e.g. File, Edit, View, Reports, Help).
- Toolbar (New, Open, Save, Calculate Yields, etc.).
- On some Tabs such as the Polygon View Tab, additional toolbar items are provided.
- Tabs located under the menus to navigate around Woodlot 4 (Project, Polygon View, Tabular View, Map View, Calculations).
- Workspace with:
 - ✓ standard text boxes for manual data entry,
 - ✓ drop down list boxes, check boxes and radio buttons for selecting options.
- Status and Information bar at the bottom of the screen.
 - ✓ The Information bar provides a log of recent actions and can be used to help troubleshoot if you are having any issues.

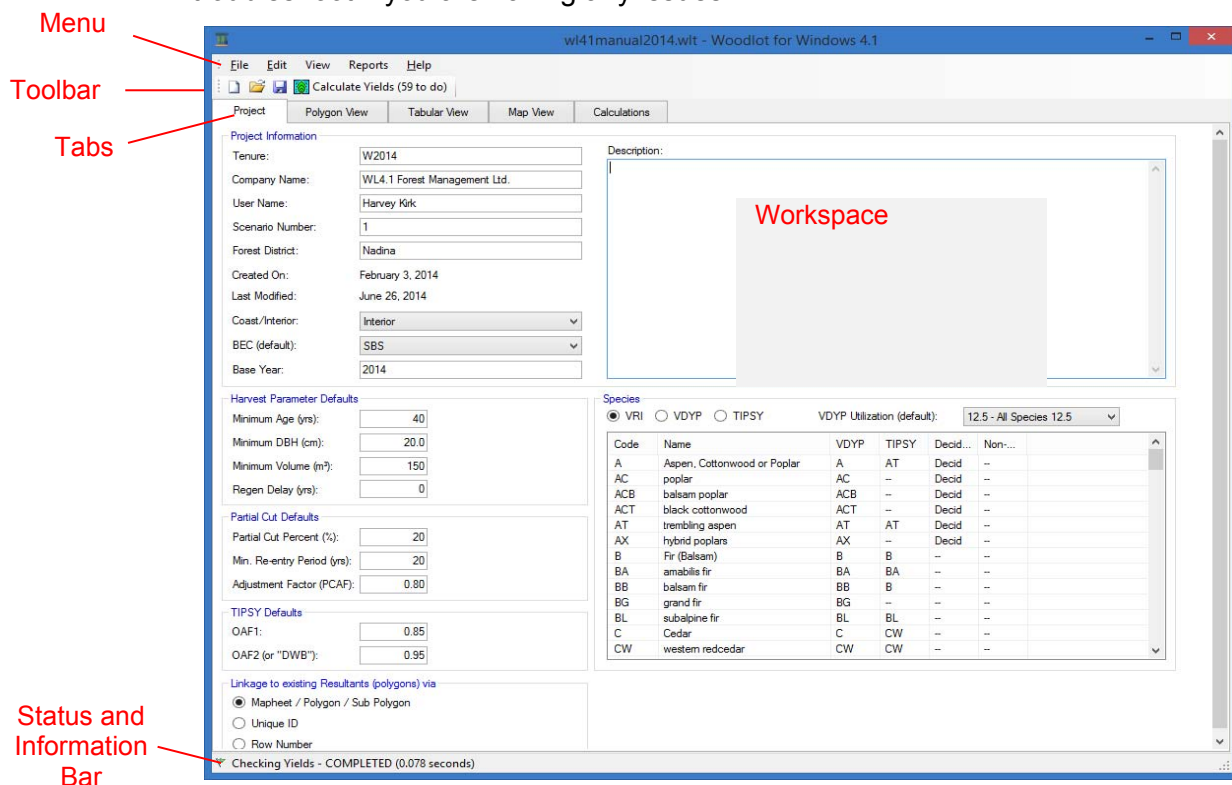

4.4 Menu Items

Woodlot 4 has five main menu items listed along the top of your window, including File, Edit, View, Reports and Help, which are displayed at all times.

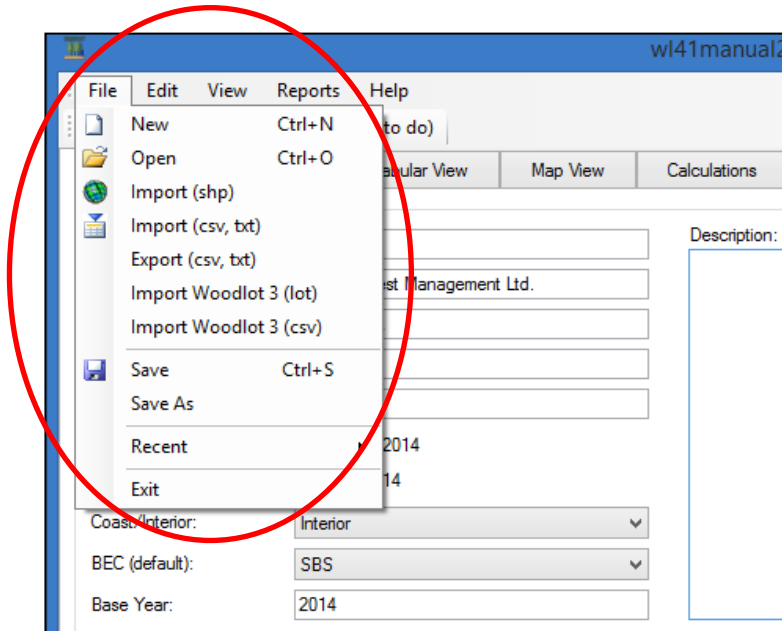

4.4.1 File

- **New** – to begin creating a new Woodlot project, and to clear out old data if you have an active project in Woodlot 4.
- **Open** – used to open a Woodlot 4 .wlt file. Note that the .wlt file is the new Woodlot 4 file format, replacing the previous Woodlot 3.2 .lot file. Refer also to the “Save” and “Save As” commands below.
- **Import (shp)** – used to import a standard ESRI Shapefile so that you can display a map in Woodlot. This feature replaces the “Import VRI (shp)” feature in Woodlot 4.0. See section 4.6 below for more on importing Shapefiles.
- **Import (csv, txt)** – used if you want to import data from a Comma Separate Values (csv) file, text (txt) file.

Only fields with names recognized by Woodlot 4 will be imported. Other data will be ignored. Refer to Section 4.8 and Appendix 5 for more on the required file formats.

- **Export (csv, txt)** - used if you want to export your Woodlot data to a Comma Separate Values (csv) file, text (txt) file. The files created will have the required Woodlot 4 file format and column headers, and will be populated with results from your analysis.
- **Import Woodlot 3 (.lot)** – used if you want to import an old Woodlot 3.2 “.lot” file. This will import all the data, yield information, harvest priorities and previous calculated AAC. Refer to section 7.11 for more information on importing old Woodlot 3.2 “.lot” files.



Woodlot 4 will convert and use as much of the old data as is available. Woodlot 4 requires some additional fields of data (for example to run VDYP7) which will be evident when you view polygons in the Polygon View tab or try to recalculate yields. You will need to update the data, recalculate yields and re-run your harvest calculations if you wish to take advantage of the advances in Woodlot 4.

- **Import Woodlot 3 (csv)** – used if you want to import a Woodlot 3.2 .csv file. This will import all the data, yield information, harvest priorities and previous calculated AAC.

Woodlot 4 will convert and use as much of the old data as is available. Woodlot 4 requires some additional fields of data (for example basal area, stems per hectare, and Biogeoclimatic zone, which are required to run VDYP7). The missing fields will be evident when you view polygons in the Polygon View tab or try to recalculate yields. You will need to add the missing information, recalculate yields and re-run your harvest calculations if you wish to take advantage of the advances in Woodlot 4.



- **Save** – used to re-save your “.wlt” file.
- **Save As** – used to save your “.wlt” file as a new file.
- **Recent** – used to access recent files that you saved for importing or opening a woodlot file. Recent will track the last 10 files used.
- **Exit** – to close Woodlot. You will be prompted to save your changes before Woodlot shuts down.

Default directory location: When you save or open a file for the first time, Woodlot will attempt to use your “My Documents” directory. If you use another directory, Woodlot will remember this and will save or open a file from the last directory location you use.

4.4.2 Edit

The Edit menu provides access to the following features:


- **Copy Species List** – to get a list of all species and codes available in Woodlot.
- **Select None** – click this to batch clear the polygons selected in the Polygon View tab, Tabular View tab, and Map View tab.
- **Remove all “Imported .LOT Yields”** – click this to batch clear the volume and batch un-check the imported yields for polygons imported from an old lot file. See 7.11.2 on using this feature. This allows you to recalculate yields with the current version of TIPSYP and VDYP.
- **Remove all Yields** – a new feature in Woodlot 4.2, which you can use to remove all yields if you wish to do a full refresh on your yields.
- **Delete Selected Polygons** – used to delete the polygons you have selected in the Polygon View tab or on the map.

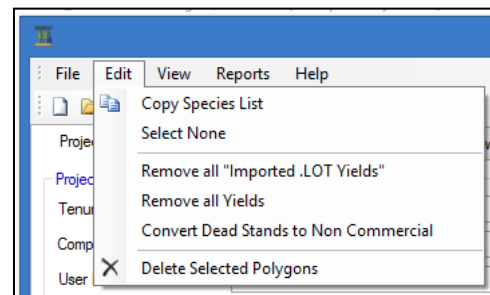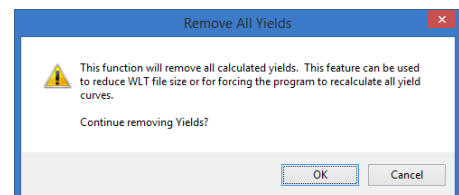

- **Convert Dead Stands to Non-Commercial** – a new utility used to change groups of forest polygons from VDYP modeled stands with a high component of dead timber to Non-Commercial stands that will be regenerated per user specifications following a stand conversion. Works with VRI data sets only. For details on the use of this feature, see Section 7.9.5 Yield Type and Yield Settings.

4.4.3 View


The View menu is used to turn on or turn off the display of detailed items in the Polygon View tab. Most viewable items now have their own display buttons on each window.

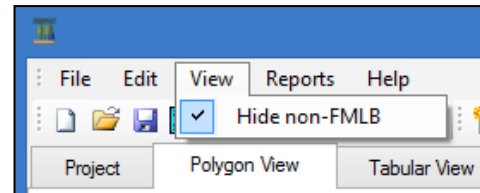

- **Hide non-FMLB** – by default, Woodlot will hide the non-FMLB polygons in the navigation tree. These can be displayed by simply navigating to the tree and clicking on the + button, or by unchecking this feature in the View menu. This is simply a shortcut feature.
- See also Section 7.2 for view items in the Polygon View tab, including the Small Map, Comments, VRI and Yield Graphs buttons.

4.4.4 Reports and Graphs

Reports and graphics can be produced in Woodlot 4 from the Reports menu. You will be required to first run a calculation to produce or update a report or graph.

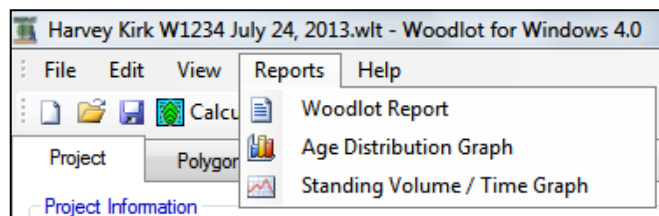

Items include:


- **Woodlot Report** – to generate the standard Woodlot Licence Harvest Planning Report.
- **Age Distribution Graph** – to generate a standard age class distribution graph (uses Plotsy).
- **Standing Volume/Time Graph** – to generate the green graph that displays on the Calculations tab (uses Plotsy).

Refer also to Section 11 Reports and Graphs for more details on creating reports and graphs in Woodlot 4.

4.4.5 Help

The Help menu item provides access to key documentation, the Woodlot User Guide and various other Help items.

- **About** – used to access the “About” screen, which has program details.
- **What’s New** – includes a summary of the latest updates in Woodlot for Windows.
- **User Guide** – used to open a pdf copy of

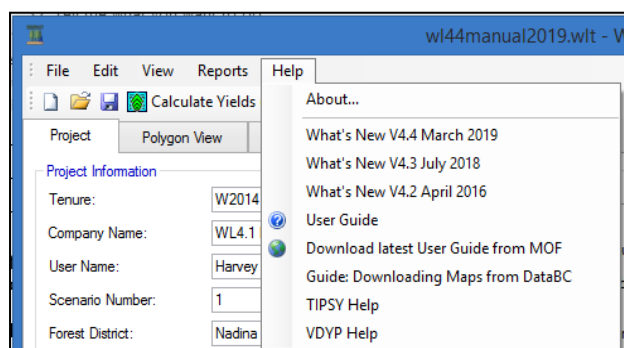


the Woodlot User Guide (i.e. this document).

- **Download Latest User Guide from MOF** – to seek and download the latest version of the Woodlot 4 User Guide from the FLNROD website.
- **TIPSY Help** – used to access the Help file from TIPSY.
- **VDYP Help** – used to access the Help file from VDYP7 Console.

4.5 Toolbars

The toolbar provides common commands used in Woodlot 4.

It is split into two sections. The first half is used on all tabs and includes general functions that can be accessed anywhere in Woodlot 4. The second half is used only in the Polygon View tab to activate features there.

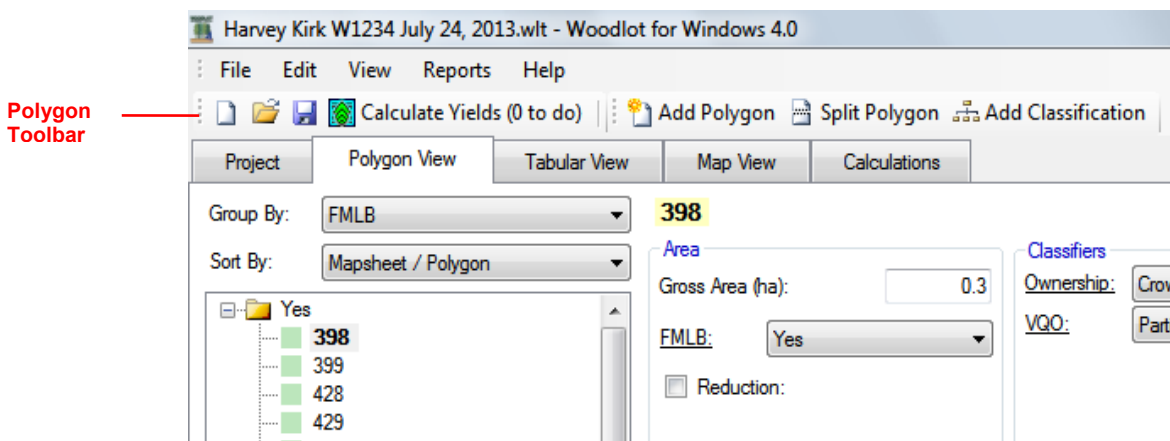

The first half of the toolbar includes the following features, shown as icons:

- **New** – used to create a new Woodlot project file.
- **Open** – used to open an existing .wlt file from Woodlot 4.
- **Save** – saves your project to the existing Woodlot 4 .wlt file you are working on.
- **Calculate Yields** – used to calculate new yields from any Tab. Shows the number of polygons that have not been calculated yet (you can check which ones are not calculated in the Polygon View tree.)

A second half of the toolbar is displayed only when you navigate to the Polygon View tab. For information on this toolbar, please refer to Section 7.

4.6 Importing Shapefiles – Import (shp)

The Import (shp) file menu item is a new feature in Woodlot 4.1, which allows you to import an ESRI Shapefile, so that you can display a map of the inventory polygons in the woodlot and import the data file. This process can also import the attribute data linked to each polygon. Refer to below and Section 6.8 for more on linking data.

Note: to minimize the chance of error, if you propose to import shapefiles into Woodlot 4 it is highly recommended that you engage or consult with a GIS technician experienced with shapefile importing features.

To import VRI data for your woodlot, please refer to Section 4.6 “Downloading Data from DataBC for Import Into Woodlot for Windows”.

The two files read by Woodlot are the .shp and .dbf. The shape type must be a polygon, (including polygon, polygon M, and Polygon Z). For more information on ESRI Shapefiles, refer also to <https://en.wikipedia.org/wiki/Shapefile>.

The Import (shp) feature is also used to import a standard Vegetation Resource Inventory (VRI) shapefile of forest inventory data (polygon shapes and attribute data). VRI data is available at no charge from the FLNROD from <https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/data-management-and-access> or <https://data.gov.bc.ca/>. Woodlot will import all fields of data but will only use and allow edits to the fields required to run Woodlot.

Each shp file is georeferenced in a mapping coordinate system. We recommend you use BC Albers, as this is that standard Ministry georeferencing format and there are not multiple zones within BC, as with UTM. However, UTM data will also work properly.


To import a Shapefile, click on File, “Import (shp)” and follow the prompts. This will open a standard Windows “browse for a file” window. Navigate to where your Shapefile is located, select it and click “Open”. The **Import** window, will display with information on your shapefile for importing to Woodlot. If you are satisfied with the shapefile, click the “Import” button to complete the importing process and return to Woodlot for your analysis. Otherwise, click “Cancel” to return to where you were prior to importing.

The Import Window

The Import window has two tabs of information about your shapefile for your consideration prior to importing, as described below.

The “Basic” Tab

The Basic tab is a summary of results of your file. Cells in green shading indicate a successful import. Cells in red shading indicate potential issues, with a suggestion to overcome the issue.

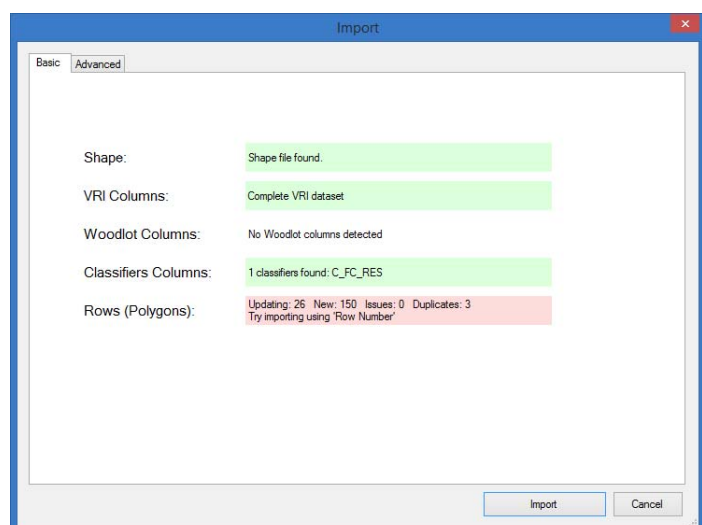


Descriptors on the Basic tab include:

- Shape – if the caption is shown in green and displays “Shape file found”, this simply acknowledges that Woodlot has found a shapefile ready to import.
- VRI Columns – indicates if you have imported a complete VRI dataset or not shape and attribute data).
- Woodlot Columns – indicates if any old Woodlot format columns have been imported. If you are importing a VRI shp file, there will be no Woodlot old columns to import.
- Classifier Columns – indicates if you have imported any Woodlot Classifiers, and the classifier field names.
- Rows (polygons) – indicates the number of polygons and how they are being processed.

If you have any red shaded sections, click on the “Advanced Tab” to adjust your import.

The “Advanced” Tab

The advanced tab is a tool which provides details on and control over how your data has imported. This is an advanced feature intended for error checking if you are having trouble importing data. You might also wish to consult a GIS technician if you are having trouble importing your files.

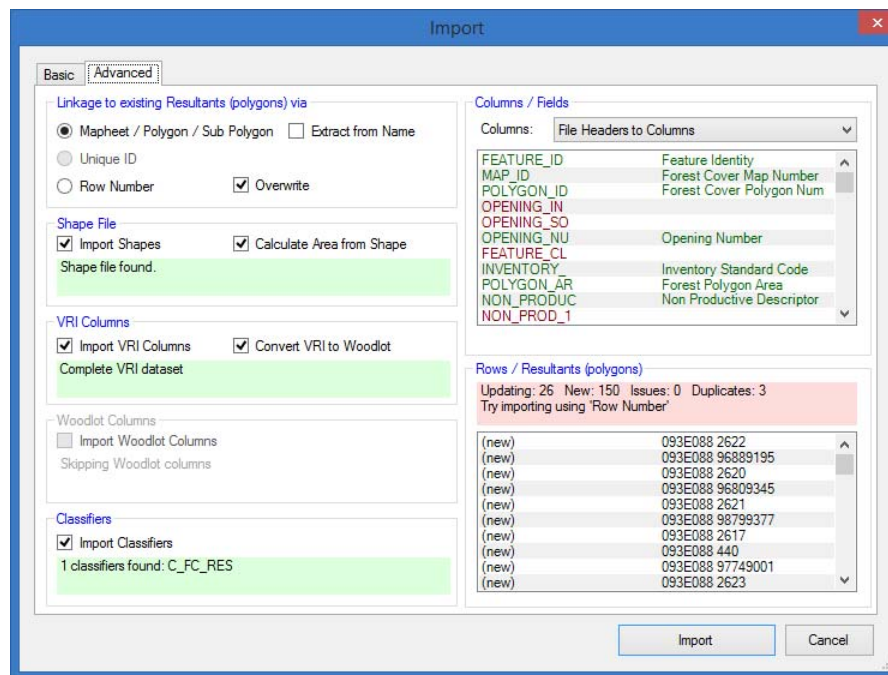

The Advanced tab has the following sections:

- Linkage to existing Resultants (polygons) via – indicates the main linkage to the row of data you imported. The default importing setting used by Woodlot is to import a file by Mapsheet/Polygon/Subpolygon since this is used in Woodlot 3.1. If you have duplicated polygons that may be in pieces, you can import them by row number as the unique identifier.



This setting in the Advanced Tab provides you the option to override the default linkage setting shown in the Project tab. Refer to Section 6.8 for more information on the default linkage settings.

- Shape File – indicates if you have imported Shapefile graphics.
- VRI Columns – indicates if you have imported VRI columns. (e.g. BEC, Feature id, etc.)
- Woodlot Columns – indicates if you have imported woodlot columns of data. (e.g. Harvest Age, Silviculture system, etc.)
- Classifiers – indicates if you have imported classifier columns of data. (e.g. Crown, private, top up, etc.)
- Columns / Fields – provides a cross reference of the data imported to fields used in Woodlot.
 - File Headers to Columns – shows the database field name on the left and how they are linked to the Woodlot variable friendly name on the right.
Green text indicates fields that have been imported. Red text indicates fields that were not imported.
 - File Headers not Imported – lists the database fields that were not imported.
 - VRI Columns to File Headers – lists the VRI data Woodlot variable names on the left and how they are linked to the database field name you imported.
 - Woodlot Columns to File Headers – lists the Woodlot only variable names and how they are linked to the database field name you imported. This does not include the VRI variables of classifiers.
 - Classifiers to File Headers – lists the Woodlot Classifiers and how they are linked to the Database field names.
- Rows / Resultants (Polygons) – describes the polygons by row depending on how you are importing them as indicated in the “Linkage to existing Resultants (polygons) via: “section:
 - Mapsheet/Polygon/Sub Polygon – shows the polygons that have tried to import. Duplicated polygons are shown in green text.
 - Row Number – shows each polygon by row number from your database. This is useful if you wish to import pieces of polygons with the same name.

4.6.1 Scenarios for Merging Spatial Data and Tabular Data

Woodlot was designed to import ESRI shape files. Only the .shp and .dbf files are accessed by Woodlot.

Woodlot cannot project data from one coordinate system to another. We recommend using NAD_1983_BC_Environment_Albers. It is possible to use UTM NAD 83 or 27 data, as long as you are not mixing multiple projections in one project.

Woodlot was designed to import standard VRI (layer 1) shape files from the MOF or custom Woodlot shape files. If you are creating your own inventory the preferred method would be to use Woodlot formatted data in your shape files. If Woodlot detects all the VRI columns it will automatically generate the Woodlot data from the VRI data.



Spatial data cannot be edited in Woodlot, so all mapping work must be completed in your GIS before importing to Woodlot.

4.6.2 Shapefile Import Updates in Woodlot 4

When importing polygons from a shapefile, Classifiers can now be used to uniquely identify sub polygons. Shapefiles with duplicate stand identifiers (usually splinters from geo processing) will now be combined into a single resultant, in previous versions each duplicate shape replaced the previous one.

The following features are important to note when importing shapefiles in Woodlot 4.


4.6.2.1 Importing

The “Use Classifiers” checkbox in the Advanced panel is a new option for importing forest cover shape files that have been combined with other layers in a GIS. Woodlot was also updated to combine shapes while importing shapefiles, if values in all the linkage fields match.

4.6.2.2 Classifiers

Fields starting with c_ or class_ will automatically import as a classifier. Starting in Woodlot 4.4, you can now select other fields (columns) as classifiers. Double click on the item in the ‘Column / Fields’ list. The item will change from red to green and the word classifier will be displayed to the right.

If you double click on a classifier it will be reset back to a column that will be skipped during the import process.

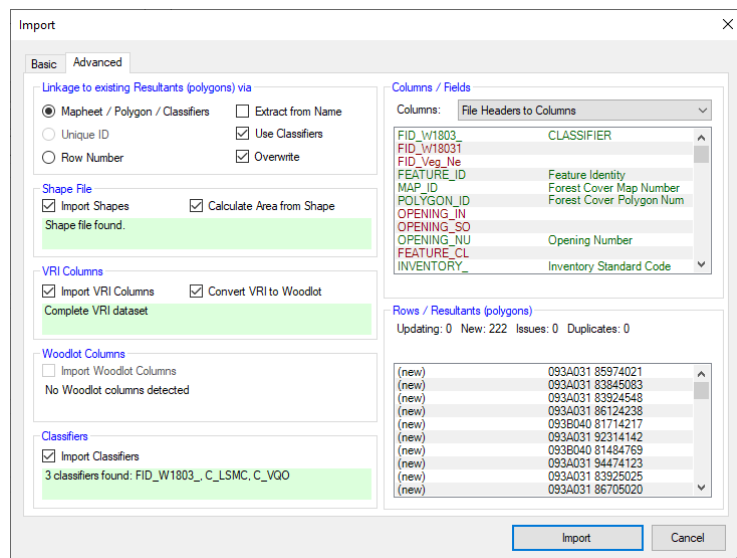

4.6.2.3 Use Classifiers

The “Use Classifiers” check box removes the requirement of having a “Sub Polygon” field.

4.6.2.4 Overwrite

The “Overwrite” checkbox has been modified slightly. In previous versions of Woodlot, if a duplicate polygon was in the shape file, the second polygon would overwrite the first. Now all duplicate pieces will be combined into a single polygon. The overwrite checkbox is used to specify if polygons already in the program are replaced.



4.7 Downloading Data from DataBC for Import Into Woodlot 4

Forest inventory shapefiles and related coverages can be assembled and downloaded from DataBC for importing directly into Woodlot for Windows. Please refer to the following link for a suggested step by step description of the process to follow:

https://www.for.gov.bc.ca/ftp/HTH/external/!publish/web/timber-tenures/woodlots/woodlot-for-windows/Download_VRI_Data_for_Woodlot_for_Windows4.2_20160824.pdf

Shapefiles can be assembled for most Woodlot Licences and area-based tenures in BC using this procedure.



4.8 Growth and Yield Models Used in Woodlot 4

Timber volume estimates and related statistics are generated in Woodlot 4 using the Ministry growth and yield models Variable Density Yield Projection (VDYP) and Table Interpolation Program of Stand Yields (TIPSY), or from custom yield tables you provide. Yield model input parameters are based on the polygon data you supply. VDYP and TIPSY are the yield models generally accepted for timber supply analysis in BC.

The choice of yield model is left to the user, and is usually based on the type of forest management for the stand as discussed below. The yield model is chosen in the Polygon View tab for each polygon. If you are not sure which management type you have, it is likely that the stand is naturally occurring and therefore you should use VDYP in the absence of better information. You may wish to discuss the matter with your Woodlot Forester. Refer to Section 7 for more on using VDYP and TIPSY in Woodlot, and for importing custom yields in the Polygon View tab.

The yield options include:

- **Variable Density Yield Projection (VDYP).** VDYP7 has replaced VDYP 6. VDYP7 is more sensitive to changes in stand density such as basal area and trees per hectare. VDYP7 Console is used in Woodlot 4, and is developed and owned by FLNROD.

VDYP is an empirical yield prediction system intended for use in unmanaged, natural stands of pure or mixed species composition. It is also used in Woodlot to model yields in partially cut stands.

Effective July 2018, Woodlot 4 uses the latest official version VDYP7 Console 7.14b; 7, 14, 2, 61.

For more information on VDYP, refer to

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/growth-and-yield-modelling/variable-density-yield-projection-vdyp>

- **Table Interpolation Program of Stand Yields (TIPSY).** TIPSY 4 is used in Woodlot 4. TIPSY is used typically for planted stands with managed stand density. It is also used for naturally regenerated stands that are managed to full stocking.

TIPSY is a growth and yield program that provides access to the managed stand yield tables generated by the models Tree and Stand Simulator (TASS) and the Silviculture on Yield, Lumber Value, and Economic Return (SYLVER). TIPSY retrieves and interpolates yield tables from its database, customizes the information and displays summaries for a specific site, species and management regime. Yield tables are available for various even-aged coniferous species, as well as trembling aspen and red alder, growing on the coast and in the interior of British Columbia. TIPSY is developed and owned by FLNROD.

TIPSY also provides a growth benefit through genetic worth for planting, includes features for pre-commercial thinning (also known as spacing) and fertilization. These features can be toggled on and adjusted in Woodlot 4 in the Yield Settings window in the Polygon View tab.

Effective July 2018, Woodlot 4 uses TIPSY v4.4.2.0. This enhancement provides the following additional functionality:

- Allows blending between Conifer and Deciduous.
- New BTP file includes all VRI species codes.
- Updated TIPSY Species list in Woodlot.



- Updated VRI species list with Latin and defined common species.
- Removed DWB feature from Woodlot as no longer part of TIPSYS.
- TIPSYS 4.3 was giving overly optimistic results for White Spruce (Sw) and was corrected in TIPSYS 4.4. The correction in TIPSYS may result in future AAC calculation reductions.

For more information on TIPSYS, refer to

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/field-forms-and-software/software-download>

- **Custom Yields.** Woodlot 4 allows users to import their own yield tables generated elsewhere, such as from TASS. A rationale should be provided to support the use of custom yield tables in a woodlot licence AAC determination.
- **Sindex.** Effective July 2018, VDYP and TIPSYS use Sindex version 1.52. Sindex is used for making Site index (SI) calculations for many commercial tree species in British Columbia, recommended by the BC Ministry of Forests, Lands and Natural Resource Operations for use in silviculture and forest planning.

Site Index is one of the most common measures of forest Site Productivity. In BC, Site Index is defined as the Site Height attained by a stand at 50 years Breast Height age. Site index is a key attribute within forest inventories and silviculture surveys, and a key input and growth driver within BC's principle suite of growth and yield models TASS, TIPSYS, and VDYP.

For more information on Site Index tools available from FLNROD, refer to:

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/growth-and-yield-modelling/site-index-tools-sitetools>

For information on choosing VDYP versus TIPSYS, refer to growth and yield modeling information within Appendices 3 and 4, or contact the FLNROD Forest Analysis and Inventory Branch, Growth and Yield Section (contact information within section 12). Refer to Appendix 4 for information on species supported by VDYP and TIPSYS. Refer also to the complete species listing on the bottom of the Project View tab.

4.9 Silviculture Systems and Yields used – Clearcut & Partial Cut

Two silviculture systems are available in Woodlot 4, clearcut or partial cut.

Clearcut's are considered even-aged stands. TIPSYS yields are generally recommended for use on even aged stands with managed stocking densities that have been regenerated following clearcutting or clearcutting with reserves, as well as naturally regenerated stands that have had forest management activities applied to bring the stand to full stocking. Generally, TIPSYS stands are even aged, managed second growth stands.

Partially cut stands in Woodlot for Windows are considered uneven aged management. Typically, harvests in these stands have used group selection, single-tree selection, variable retention, or another system in which the residual stand that remains following harvest presents the next harvest opportunity.

Yield curves are not widely available for uneven-aged/partially cut stands in BC. Therefore, an approximation has been used in BC timber supply modeling and in Woodlot 4 to estimate yields from partially cut stands. This is the same general method used in Woodlot 3.2, referred to as the "average age" partial cut method. The method has been updated in Woodlot 4 to start the



harvest at the older of the current age or your target harvest age. It will then harvest down to the % removal from that age.

A partial cut stand is assumed to be growing initially as a natural stand using a VDYP yield curve for the stand attributes. The stand is harvested down to a residual volume (set by the user) and the corresponding stand age for a natural stand with the post-harvest volume is determined from the VDYP yield curve. Stand age is reset to the younger age, and the stand is “grown” until the next partial cut harvest. The cycle repeats over the planning horizon. Since VDYP is based on natural stands that are fully stocked and not partially harvested, the partial cut adjustment factor (PCAF) was introduced to simulate re-growth at a lesser density and to reflect any rebound delay effects. The default PCAF used in Woodlot 4 is a 20% reduction in VDYP predicted stand yield. The use of the “average age” method is a reasonable first approximation of partial cut yields.

Inappropriate combinations of (a) the interval between partial cut harvests and (b) the percent of stand volume removed at each harvest can lead to unintended results. Harvesting too much/too soon will drive net stand volume towards zero, and lead to underestimation of AAC. Cutting too little/too infrequently will result in accumulation of unharvested volume, and lead to underestimation of AAC. Review of the detailed harvest records (tell them where it is discussed) and fine tuning of harvest parameters for stands managed under a partial cut regime is recommended.

Another partial cutting simulation technique also considered for Woodlot 4 was the “multi-age” method. This method would simulate partial cutting as a series of smaller patch cuts, resulting in groups of patches with multiple ages across the polygon. This feature will be considered for inclusion in a future version of Woodlot.

For information on default settings used by Woodlot for partial cutting, please refer to Section 6.4 Partial Cut Defaults. Refer to Section 6.3, 7.9.1 and Appendix 1 for more on silviculture systems and partial cutting in Woodlot 4.

4.10 File Types used in Woodlot 4

Woodlot 4 is designed to work with any of the following file types. Files are imported and exported from Woodlot from the File menu item. Refer to section 4.41 and Appendix 5 for more detailed information including the required field names used in the csv import file. The order of fields does not matter.


- **wlt** – A .wlt file is the new file type you create when saving your file from Woodlot 4. This is the replacement for the previous versions .lot file.

To load a .wlt file in Woodlot 4, use the File, Open menu item.

- **lot** – Woodlot 4 can import a Woodlot 3.2 lot file. This will bring in data, yield information, harvest priorities and the calculated AAC from previous versions of Woodlot. If you plan to update or refresh your AAC, some fields will need to be filled in or updated in Woodlot 4, particularly the data in Polygon View. A .lot file is loaded into Woodlot using the File, Import Woodlot 3 (lot) menu item. Refer to section 7.11 for more detailed information on imported lot files.



- **shp** – Woodlot 4 will accept any standard ESRI Shapefile so that you can display a map in Woodlot. This includes standard FLNROD VRI Shapefiles. Refer to Section 4.6 above on importing Shapefiles.
- **CSV (Woodlot 3)** – Woodlot 4 can import a Woodlot 3 Comma Separate Values (CSV) file. If you import a csv file, only fields with names recognized by Woodlot 4 will be accepted. A csv file is imported into Woodlot using the File, Import Woodlot 3 (CSV) menu item.
- **CSV (Woodlot 4)** – Woodlot 4 can import a new CSV file, and export to a new CSV file. Only fields with names recognized by Woodlot 4 will be imported. This file type is loaded into Woodlot using the File, Import (csv, txt) menu item.
- **txt** - Woodlot 4 can import a new .txt file, and export to a new txt file. Only fields with names recognized by Woodlot 4 will be imported. This file type is loaded into Woodlot using the File, Import (csv, txt) menu item.

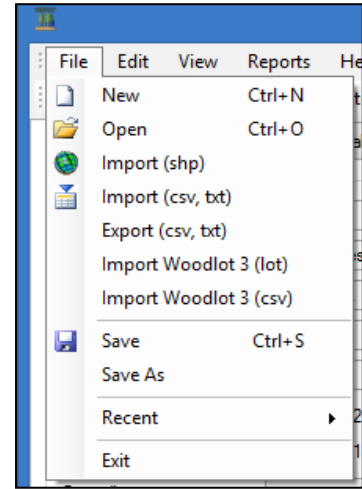

Hint: If you are not using standard VRI data, a good way to ensure you have the correct data and field formats for use in Woodlot 4 is to export a sample project file from Woodlot 4 in the file type you plan to use to import your data. Use this as a template. Either modify your data to match the template format, or populate the template with your data based on the column header field names. For example, if you plan to use a CSV file, export a sample project in CSV format, keep the column headers, delete the sample data, fill the template with your woodlot data and import the result into Woodlot 4.

Note that sample files are provided in C:\Program Files (x86)\Woodlot for Windows 4\Sample.



5. The About Screen


The About screen shows important information on Woodlot 4 including:

- Woodlot software name.
- Woodlot version number and version date.
- Ownership and copyright – Forest Tenures Branch, Ministry of Forests, Lands and Natural Resource Operations.
- The software developer.

The About screen also includes important versioning information on the dependent software used in Woodlot 4, including:

- VDYP7 Console.
- Batch TIPSy (bTIPSy).
- Sindex.
- Plotsy.

When you start Woodlot, the About screen will appear for a few seconds and then close. You can always access the About screen through the Help menu.

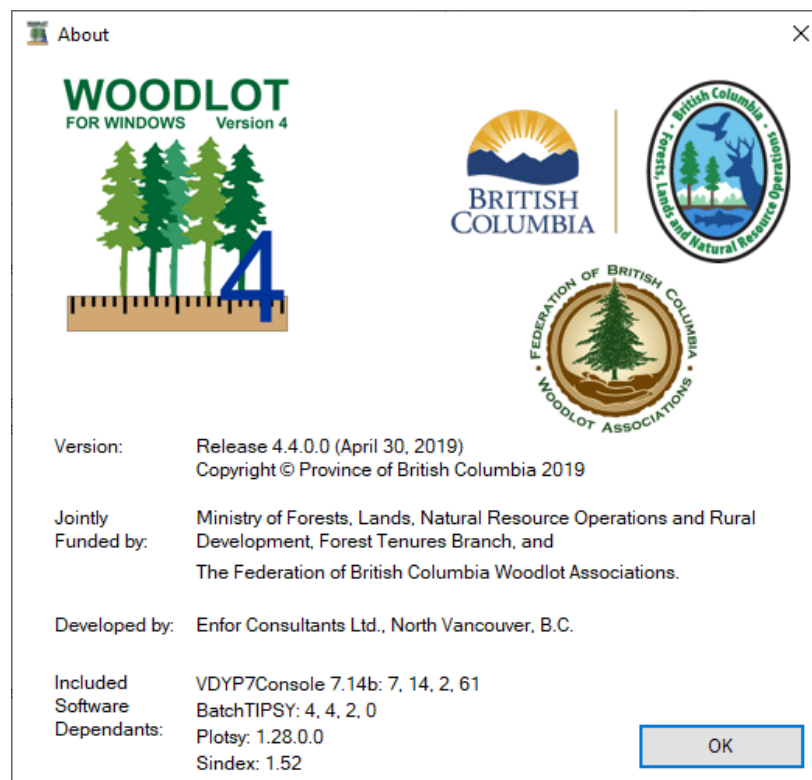

6. Project Tab

The Project tab is used:

- to enter project information for your woodlot,
- to adjust default settings that will apply globally to the entire woodlot, and
- to view basic information inventory and yield assumptions.

You can edit the default values as required. You can also change or override these default values on a polygon specific basis in the Polygon View tab.

It is important to check that the default settings reflect conditions on and assumptions applicable to your woodlot, as the defaults will be used in the absence any polygon specific information that you may provide.

This is a substantially updated version of the old Project screen in Woodlot 3.2, which only included basic information on the woodlot. The main sections in the Project Tab include:

- Project Information.
- Harvest Parameter Defaults.
- Partial Cut Defaults.
- TIPSYS Defaults.
- Species - information used in VRI, VDYP and TIPSYS and utilization levels.
- Linkage – to existing Resultants (polygons)

Project Information

Tenure: W2014

Company Name: W4.1 Forest Management Ltd.

User Name: Harvey Kirk

Scenario Number: 1

Forest District: Nadina

Created On: February 3, 2014

Last Modified: June 26, 2014

Coast/Interior: Interior

BEC (default): SBS

Base Year: 2014

Harvest Parameter Defaults

Minimum Age (yrs): 40

Minimum DBH (cm): 20.0

Minimum Volume (m³): 150

Regen Delay (yrs): 0

Partial Cut Defaults

Partial Cut Percent (%): 20

Min. Re-entry Period (yrs): 20

Adjustment Factor (PCAF): 0.80

TIPSYS Defaults

OAF1: 0.85

OAF2 (or "DWB"): 0.95

Linkage to existing Resultants (polygons) via

☒ Mapsheet / Polygon / Sub Polygon

☐ Unique ID

☐ Row Number

Species

VDYP Utilization (default): 12.5 - All Species 12.5

Code	Name	VDYP	TIPSYS	Decid
A	Aspen, Cottonwood or Poplar	A	AT	Decid
AC	poplar	AC	AT	Decid
ACB	balsam poplar	ACB	AT	Decid
ACT	black cottonwood	ACT	AT	Decid
AT	trembling aspen	AT	AT	Decid
AX	hybrid poplars	AX	AT	Decid
B	Fir (Balsam)	B	B	Decid
BA	amabilis fir	BA	BA	Decid
BB	balsam fir	BB	B	Decid
BG	grand fir	BG	B	Decid
BL	subalpine fir	BL	BL	Decid
C	Cedar	C	CW	Decid
CW	western redcedar	CW	CW	Decid

Note: Important new global defaults are present in Woodlot 4.2. These will affect your woodlot calculations, and include:

- Coast/Interior for your woodlot.
- BEC zone for your woodlot.
- Base Year for your timber inventory.
- VDYP Utilization level options.

6.1 Project Information and Default Parameters

The Project Information tab is used to enter basic information about your woodlot, as well as some important new default values required in Woodlot 4. See also 6.1.1 Setting Project Defaults.

The basic information is optional, for your reference and use in the report. It can be text or numbers, and includes:

- Tenure – enter your woodlot licence number.
- Company Name – enter your company name.
- User name – enter your name.
- Scenario number – enter the scenario name or number.
- Forest District – enter the forest district your woodlot is in.
- Created on – will be populated by Woodlot 4, which is the date you first started your work.
- Last Modified – the date you last saved the file, + the number of changes made since you last saved the wlt file.

Ensure you have selected the following four global default values for your woodlot in the Project Information screen, as they will influence the yields generated from VDYP and TIPSYP.:

- **Coast/Interior** region of BC - Indicate if your woodlot is on the Coast or Interior. This will affect results in TIPSYP and VDYP. It cannot be changed by polygon.
- **BEC Zone** – indicate the default Biogeoclimatic Ecological Classification (BEC) Zone your woodlot is in. BEC can be changed for each polygon in the Polygon View tab. BEC is now required for VDYP7.
- **Base Year**– The Base Year is:
 - year that polygon ages are identified for, and reported on the Polygon tab for the Existing Forest, and
 - the starting year used for your timber supply simulation in the Calculation tab.



Woodlot uses the Base Year to determine the age of each polygon at the start of your timber supply simulation. Woodlot subtracts the year of establishment from the Base Year to arrive at the current age for that year.

For example, if you set your Base Year to 2016 and your polygon was established in 1920, the age of the polygon will be $2016 - 1920 = 96$ years in 2016. And, 2016 will be the first year for your timber supply simulation. (This also means to bring forward and update older analyses, or check Implications of deferring your analysis.)

You will be required in Woodlot 4 to set the Base Year if you import data with an “Age”, since Woodlot 4 does not store the age directly. It stores the established year and shows the calculated age from that date to the Base Year.

When you import a lot file, you will be prompted to select the Base Year, which you will need to enter if you have not done so already.

If your woodlot inventory has different base years, you can address this in three ways in Woodlot.

- a) **Multiple Import** – For each set of data you are importing, set the base year in the Project tab, import that group of polygons. Repeat for each set of inventories, changing the base year each time for each set of data. Once you have finished, remember to reset the base year to year the want to start your analysis, which is usually the current year.
- b) **Adjust Current Age** – Alternately, you can import all polygons, then set one base year in the Project tab, then go back to each polygon and adjust the current age to the age at the base year that you just set.
- c) **Adjust stand ages to a uniform base year in GIS system prior to import.**
- d) **Create and add an Established Year field to the dataset you wish to import** – create and add a field called YearEstab, and populate it for each polygon with the year that the stand was established. Woodlot will then automatically display the current age. $\text{Current Age} = \text{Base Year} - \text{Established Year}$.

If you have any questions on the use of Base Year in Woodlot for Windows, please consult your support contact.

- **VDYP Utilization level** – the VDYP utilization level needs to be set for your woodlot. TIPSYS utilization is always set to 12.5 cm diameter at breast height (dbh). See below.

6.1.1 Setting Project Defaults

Once you have created your woodlot default parameters in the Project tab, to save your default parameters, from the main “File” menu, select “Save Project Defaults”. (Project defaults will be saved to the registry file.)

As of July 2018, Woodlot users need to set the project default parameters before importing files, editing forest or calculating yields. Woodlot no longer always defaults to the Coast. Instead, Woodlot now defaults to a blank region until you set your region.



6.2 Description

The large workspace on the top right of the window is provided to allow you to help you keep notes and provide documentation as you do work.

Click on the description to start typing. Text will wrap and the box will scroll, allowing for many rows of text. Right click in the Description box to bring up a standard Windows menu for editing items.

6.3 Harvest Parameter Defaults

The harvest parameters used in Woodlot 4 are the same as in Woodlot 3.2. They are used to establish economic rotation parameters for the woodlot. These include:

- Minimum Age (yrs) – the youngest age needed to harvest a forest polygon.
- Minimum DBH (cm) – the minimum stand diameter at breast height needed to harvest a forest polygon.
- Minimum volume (m³/ha) – the minimum merchantable volume per hectare needed to harvest a forest polygon.
- Regen Delay (yrs) – include your expected default regeneration delay. Typically, this is the number of years after harvest until you have a fully stocked planted or naturally regenerated stand. A regen delay of 0 yrs assumes you will have a fully stocked, growing, new stand in the same year that you harvest.

6.4 Partial Cut Defaults

The Partial Cut defaults in this section are used in the “average age” partial cut method only, and are the same partial cut defaults used in Woodlot 3.2. For more on partial cut methodology in Woodlot 4, please refer to Section 4.7 and Appendix 1.

The partial cut defaults include:

- Partial Cut Percent (%) – the targeted percent volume to be harvested on the first entry. For example, a 25% Partial Cut Percent removal when a stand reaches 400 m³/ha will result in a harvest of 100 m³/ha. It will assume that the new stand is 300 m³/ha and begin the yield curve for the next entry as if the residual stand is at the age when a normal natural stand reaches this volume. On the harvest entry, Woodlot will again harvest the stand down to this volume level, and re-grow up from there. Acceptable values 1-50%.
- Min. Re-entry period (yrs) – this is the number of years you wish to allow the forest in the polygon to grow until you harvest again. Woodlot will grow the forest for that number of years, and then at the re-entry, will harvest the in-growth down to the same residual level as was set on the first entry. In the example above, this would harvest ingrowth down to 300 m³/ha. Acceptable values 10-999 years.
- Adjustment Factor (PCAF) – the Partial Cut Adjustment Factor (PCAF) is normally defaulted to 80% and should not be adjusted unless you have information to support a change. Partial



cut yield curves are not widely available in BC, and so Woodlot uses VDYP with a PCAF to offset any overestimate of growth response from the base fully stocked stand. It is assumed that a stand that is partially cut results in a lower stand density and will respond at a slower growth rate than the natural average density stands that VDYP uses to calibrate growth. Since VDYP assumes a fully stocked stand of the full range of diameter classes is growing, on partial cut stands, the default PCAF of 80% is used to model the stand growth at the lower stand density to avoid overestimating growth rate.

- Woodlot now defaults to require a minimum 50 m³/ha before re-entry on partial cut stands. This will avoid a user accidentally specifying a re-entry % where the resulting re-entry volume is unreasonably low (e.g. 2 m³/ha). Woodlot will defer harvesting a polygon until the new minimum is reached. Users can over-ride the default by entering their own minimum re-entry volume.

Please note that inappropriate combinations of (a) the interval between partial cut harvests and (b) the percent of stand volume removed at each harvest can lead to unintended results. Harvesting too much/too soon will drive net stand volume towards zero, and lead to underestimation of AAC. Cutting too little/too infrequently will result in accumulation of unharvested volume, and lead to underestimation of AAC. Review of the detailed harvest records (tell them where it is discussed) and fine tuning of harvest parameters for stands managed under a partial cut regime is recommended. Refer also to Section 4.9, Silviculture Systems and Yields used – Clearcut & Partial Cut.

6.5 TIPSy Defaults

TIPSy Operational Adjustment Factor (OAF) defaults can be adjusted in the Project Tab. (In Woodlot 3.2, this setting was on the Polygon Data screen.)

OAFs are used by TIPSy to mimic operational conditions, to adjust ideal research forest conditions to operational forest situations. The default and recommended OAF settings are:

- OAF 1 accounts for the reduction of physical growing space due to non-forested openings created by non-mapped rock outcrops, swamps and non-commercial tree cover.

OAF1: 0.85. This is the same as a 15% OAF1 in previous versions of TIPSy.

- OAF 2 is used to account for decay, waste, and breakage, and some pest damage that increases towards maturity.

OAF2: 0.95. This is the same as a 5% OAF2 in previous versions of TIPSy.

(Alternately, for OAF2 in TIPSy 4.3 you can use the DWB feature based on your BEC zone. However, Forest Analysis and Inventory Branch have advised that the DWB setting is not recommended for use because it is partially based on old growth loss factors used in VDYP7 that may not be appropriate for second growth stands. This feature is under review by FAIB).

TIPSy 4.3 Help defines decay, waste and breakage as:

- Decay “is caused by wood-rotting fungi, which produce soundwood losses due to physical and chemical processes”.



- Waste is the “soundwood portion of a tree or log which has more than 50% decay, considered non-recoverable under current utilization standards”.
- Breakage “represents all soundwood losses due to felling and yarding. The broken pieces are considered too small to be merchantable”.

For more information on OAFs and what is appropriate for use, see TIPSYS Help



6.6 Tree Species

The Species section provides you with two important new capabilities:

- View tree species and related inventory and modeling information used in Woodlot 4.
- Select default utilization levels for your woodlot.

Harvest Parameter Defaults

Minimum Age (yrs): 40
 Minimum DBH (cm): 20.0
 Minimum Volume (m³): 150
 Regen Delay (yrs): 0

Partial Cut Defaults

Partial Cut Percent (%): 25
 Min. Re-entry Period (yrs): 30
 Adjustment Factor (PCAF): 0.80

TIPSYP Defaults

OAF1: 0.85
 OAF2 (or "DWB"): 0.95

Species

☒ VRI ☐ VDYP ☐ TIPSYP

VDYP Utilization (default): 12.5 - All Species 12.5

Code	Name	VDYP	TIPSYP	Decid
A	Aspen, Cottonwood or Poplar	A	AT	Decid
AC	poplar	AC	--	Decid...
ACB	balsam poplar	ACB	--	Decid...
ACT	black cottonwood	ACT	--	Decid...
AT	trembling aspen	AT	AT	Decid...
AX	hybrid poplars	AX	--	Decid...
B	Fir (Balsam)	B	B	--
BA	amabilis fir	BA	BA	--
BB	balsam fir	BB	B	--
BG	grand fir	BG	--	--
BL	subalpine fir	BL	BL	--
C	Cedar	C	CW	--
CW	western redcedar	CW	CW	--

AAC = 1,269

Note: To copy the species list, navigate to the Edit menu and select Copy Species. This will copy the table listed in the Species window.

The species information used in Woodlot 4, including cross references and utilization levels, is derived from VRI standards, VDYP documentation and TIPSYP documentation. The Forest Analysis and Inventory Branch of FLNROD have reviewed it; please contact FAIB if any questions. Refer also to Appendix 4 "Tree Species Used in Woodlot 4".

All tree species supported by the FLNROD Vegetation Resources Inventory (VRI), VDYP7 and TIPSYP 4.3 are available for use in Woodlot 4, and have been cross-linked. This is a complex and important information source in timber supply modeling, important for users to be aware of so they understand modeling limitations. Hence, the listing has been provided in the Project Tab with defaults.

Selecting on the radio buttons will display the listing for each data source and model, as follows.

Note: As a caution, TIPSYP will not work with all deciduous species. If a user accepts the TIPSYP offer to use VDYP species and there is a deciduous species other than AT or DR then they will have to adjust the species and percentage order after the data import is done.



6.6.1 VRI Species

For Vegetation Resources Inventory (VRI) data, this list describes the species code, common names, species code used in VDYP, species code used in TIPSYP and whether it is considered deciduous or non-commercial.

Species

☒ VRI ☐ VDYP ☐ TIPSYP VDYP Utilization (default): 2G - Second Growth

Code	Name	VDYP	TIPSYP	Deciduous	Non-Commercial
A	Aspen, Cottonwood or Poplar	A	AT	Decid	--
AC	poplar	AC	--	Decid	--
ACB	balsam poplar	ACB	--	Decid	--
ACT	black cottonwood	ACT	--	Decid	--
AT	trembling aspen	AT	AT	Decid	--
AX	hybrid poplars	AX	--	Decid	--
B	Fir (Balsam)	B	B	--	--
BA	amabilis fir	BA	BA	--	--
BB	balsam fir	BB	B	--	--
BG	grand fir	BG	--	--	--
BL	subalpine fir	BL	BL	--	--
C	Cedar	C	CW	--	--
CW	western redcedar	CW	CW	--	--

Only the species that show under the VDYP and TIPSYP headers will have yield information calculated for them. Unlisted species can be imported for completeness but will not have yields calculated in Woodlot.

6.6.2 VDYP Species

For VDYP, this list describes the species code, common name, default utilization level (which is set above), species grouping, site index species used and the yield curve reference.

Species

☐ VRI ☒ VDYP ☐ TIPSYP VDYP Utilization (default): 2G - Second Growth

Code	Name	Util.	SpC....	Sindex	Curve Name
A	Aspen/Cottonwood/Poplar	12.5	AC	At	Nigh, Krestov, and Klinka 2...
AC	Poplar	12.5	AC	Acb	Huang, Titus, and Lakusta ...
ACB	Balsam Poplar	12.5	AC	Acb	Huang, Titus, and Lakusta ...
ACT	Black Cottonwood	12.5	AC	Act	Thrower (1992ac)
AD	Cottonwood (exotic)	12.5	AC	Act	Thrower (1992ac)
AH	Poplar Cottonwood hybrid	12.5	AC	Act	Thrower (1992ac)
AT	Trembling Aspen	12.5	AT	At	Nigh, Krestov, and Klinka 2...
AX	Hybrid Poplars	12.5	AC	Acb	Huang, Titus, and Lakusta ...
B	Balsam	12.5	B	Ba	Nigh (2009)
BA	Amabilis/Pacific Silver Fir	12.5	B	Ba	Nigh (2009)
BAC	Amabilis fir (coast)	12.5	B	Ba	Nigh (2009)
BAI	Amabilis fir (interior)	12.5	B	Ba	Nigh (2009)
BB	Balsam Fir	12.5	B	Bl	Chen and Klinka (2000ac)

6.6.3 TIPSYP Species

For TIPSYP, this list describes the species code, common name, default utilization level (which is set above), default Genetic Worth (%), volume curve used, site index species used and the yield curve reference.

Genetic Worth defaults cannot be set in this version of Woodlot. Instead, Genetic Worth values are entered for each polygon in the Polygon View tab, Yield Settings, or via an export to CSV and edit in Excel.

Species

☐ VRI ☐ VDYP ☒ TIPSYP VDYP Utilization (default): 12.5 - All Species 12.5

Code	Name	Util.	G.W.	Volume	Sindex	Curve Name
A	Aspen	12.5	0	--	AT	Nigh, Krestov, and Klinka
AC	Poplar	12.5	0	--	ACT	Thrower (1992ac)
ACB	Balsam Poplar	12.5	0	--	ACB	Huang, Titus, and Lakusta
ACT	Poplar	12.5	0	--	ACT	Thrower (1992ac)
AT	Trembling Aspen	12.5	0	AT	AT	Nigh, Krestov, and Klinka
B	Balsam	12.5	0	SW	BL	Chen and Klinka (2000ac)
BA	Amabilis Fir	12.5	0	HWC	BA	Nigh (2009)
BG	Grand Fir	12.5	0	--	BL	Chen and Klinka (2000ac)
BL	Alpine Fir	12.5	0	SW	BL	Chen and Klinka (2000ac)
CT	Cottonwood	12.5	0	--	ACT	Thrower (1992ac)
CW	Western Redcedar	12.5	0	CW	CWI	Nigh (2000)
CWC	Coastal Western Redcedar	12.5	0	CW	CWC	Kurucz (1985ac)



6.7 Utilization Levels

The timber utilization levels available in Woodlot 4 are based on utilization levels used by FLNROD in timber supply analyses in BC.

Utilization generally depends on whether the stand is an existing natural stand, existing managed stand, a future managed stand, second growth or old growth, on the coast or interior. The following default options were developed for Woodlot 4.

You can change the utilization level for all polygons from the Polygon View tab if the default settings are turned on for those polygons. To do this, navigate to each polygon and check that the “[]” are selected in the utilization section of the VDYP and TIPSYP screens.

TIPSYP yields are generally calculated to a default 12.5 cm dbh utilization, while VDYP yields are calculated to 12.5 or 17.5 cm depending on location and species.

Yield Type	Utilization Default Option	Species	Typical Application	Min. dbh (cm)	Max. Stump Height (cm)	Min. Top Diameter (cm)
TIPSYP	All cases	All species	Existing managed stands Future managed stands	12.5	30	10
VDYP	2G-Second Growth	All species	Existing natural second growth stands	12.5	30	10
VDYP	HG-Haida Gwaii	All species	Applies only to Haida Gwaii, all ages, all species	12.5	30	10
VDYP	OG-Old Growth	Varies by species	Existing natural old growth stands	17.5 or 12.5	30	10
VDYP	12.5 - All Species 12.5	All species	Existing natural second growth stands	12.5	30	10
VDYP	17.5 - All Species 17.5	All species	Existing natural old growth stands	17.5	30	10

If you wish to use other than the default 12.5 cm dbh utilization in TIPSYP:

- 1) Make a backup copy of C:\Program Files\Woodlot for Windows 4\Woodlot\Species.dat (One editing mistake could render Woodlot inoperable until you get a clean copy of this file. A backup copy ensures this will not be an issue.)
- 2) Open C:\Program Files\Woodlot for Windows 4\Woodlot\Species.dat in Notepad.



- 3) Scroll down to the TIPSYS section at Line 146.
- 4) Replace the 12.5 values for the species of concern (e.g. with 17.5 values). Do not alter the file formatting or spacing, just change the numbers.
- 5) Save, exit. TIPSYS yields will now use the changed utilization standards.

Important Note: If you make the utilization level change after you have run Calculate Yields once, Woodlot will not understand that the TIPSYS yield parameters have changed and that yields should be recalculated. If you start again with freshly imported data, your TIPSYS yields will calculate with the new utilization standards. This is not an attractive option if you have invested time in editing your data set. In that case:

- 1) Export your data to CSV.
- 2) Load the CSV into Excel.
- 3) Go to the bottom of the data set where you will find a set of rows with no polygon number, BEC, area, or age information, but which do have a "YieldMeth" entry of "TIPSYS"(in Excel Column AG). These are the TIPSYS "Reforest To" scenario definitions. Note which row numbers these scenarios occupy. Or change the font or color to clearly identify the rows.
- 4) Navigate many columns to the right to Excel Column BV which contains the "Density" entry. This is the plantation establishment density. Add 1 to the value shown. For example, 1600 becomes 1601. Do this for all the TIPSYS "Reforest To" scenarios.
- 5) Save the CSV, unload it from Excel
- 6) Go back to Woodlot, import the CSV. Be sure to choose 'Yes - Update' when prompted!
- 7) Woodlot will now identify that the TIPSYS scenario information has changed, as the initial establishment density is higher, and will re-calculate yields for the polygons using the modified utilization standards. The increase of 1 seedling per hectare has no measurable effect on yields.

6.8 Linkage to existing Resultants (polygons) via...

An advancement to Woodlot 4.1 was to add an identifier for users that import data files. Previous versions of Woodlot identified rows of data by the "Name". Now users can select if they would prefer to use "Mapsheet/Polygon/SubPolygon", "Unique ID" or "Row Number" from their data file. The setting shown in the Project tab is the universal default setting that will be used when importing your files.

You can also override these default linkages when importing a shapefile by choosing a new setting in the Import window, Advanced tab. See the Import section 4.6 for more information. This feature is helpful for users that wish to import files over existing files. If you are unsure, leave the setting in its default position, which will apply to most users. The setting should change to "Row Number" if you import a shp file.



6.9 Stands with more than one Resultant


A stand can be made up of more than one resultant. Refer also to Section 7.13 for a detailed description on Stands versus Resultants in Woodlot 4.4.

The stand is linked to the existing forest, harvesting and future forest information. The resultants contain the Classifiers and are linked back to the stand.

In Woodlot 4.4, the polygon list now shows the resultants as follows:

- A resultant that is only part of the stand will be displayed with a half-gray bar, and
- There will either be a sub polygon identifier or a “(piece #)” suffix.

The small map has been updated to display the other resultants linked to this stand in gray.

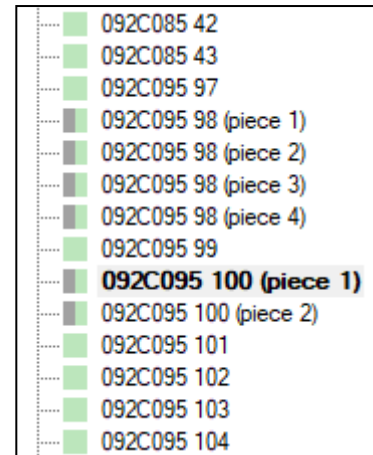


092C085 42
092C085 43
092C095 97
092C095 98 (piece 1)
092C095 98 (piece 2)
092C095 98 (piece 3)
092C095 98 (piece 4)
092C095 99
092C095 100 (piece 1)
092C095 100 (piece 2)
092C095 101
092C095 102
092C095 103
092C095 104

Right clicking on a polygon will bring up a context menu that allows you to unlink a resultant from the stand so it can be edited independently.

Unlink polygon – Creates a new stand with the same information (Existing Forest, Reforest To) as the original stand and moves the selected resultant to that new stand. The polygon can now be managed independently.


Split Polygon – Splits a resultant into two resultants allowing classifiers to be modified independently. Shapes linked to that resultant will be deleted after the split, because they don't represent the new resultant area. The unlink feature can be used if the existing or future forest needs to be changed on one of the pieces.



On the Rename Polygon screen, the top two items “Mapsheet” and “Polygon” edit the Stand. The rest of the items are specific to the Resultant.


To override the default suffix of ‘(piece #)’, a ‘Sub Polygon’ can be specified.

The Unique Identifier field can be used for importing data into a specific polygon.

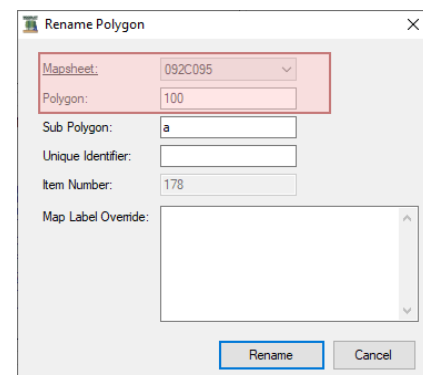


7. Polygon View Tab

The Polygon View tab is used view, edit, add and delete forest polygon information, set yield calculation parameters, and define the conversion of existing forest stands to a reforested forest type. Features of this tab are similar to the Polygon Data screen in Woodlot 3.2, with streamlined and new features added.

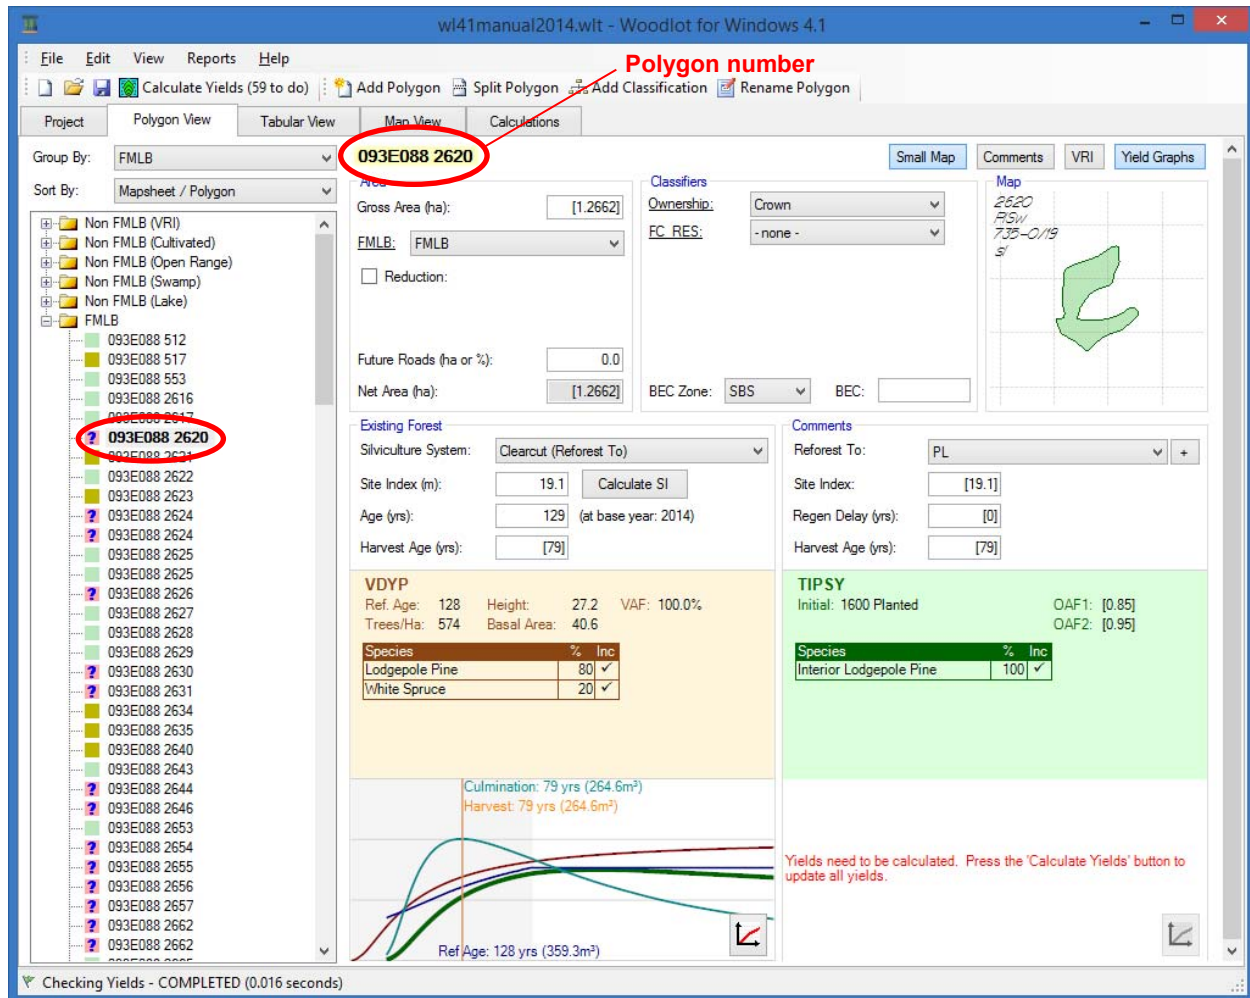

This tab has the following functional sections:

- Polygon View Toolbar
- Navigation tree
- Summary (when activated)
- Area
- Classifiers
- Map
- Comments/VRI (when activated)
- Existing Forest
- Reforest to
- Yields

7.1 Conventions Used in Polygon View

There are a few helpful conventions used on the Polygon View tab to keep in mind as you work in Woodlot 4:

- **Forest Polygon** - The forest polygon you are working on is the displayed screen of data. The polygon number is highlighted in the navigation tree, and listed at the top of your workspace highlighted in yellow.

Your polygon number includes the Mapsheet number, polygon number and can include a sub-polygon number, similar to Woodlot 3.2.

- **Defaults [] Square Brackets** – As in Woodlot 3.2, square brackets represent a default or imported numerical value.

To override and replace a default or imported value, click on the cell and type over with your better information. Click to another place on the screen to register the change.

To reset the entry to the default values, type over the value with a [] square bracket or any text character (e.g. a, b, c, xx, etc.), then click to another polygon on the screen to register the change.

- **Adding Data** – add data by typing into a cell.

Use the Add Polygon menu item to manually add polygons. See below for information on manually adding polygons.

- **Imported Lot files** – when you import an old lot file, Woodlot imports the base data, timber yields and analysis results. If you wish to recalculate your yields, you will need to uncheck the check box in VDYP and TIPSYS Yield Settings and enter the missing data.¹
- **Viewing Yield Information** – you can view yield information for the polygon by clicking anywhere in the yield screen.
- **Display Yield Curves** – you can view your yield curve by clicking on the Plotsy icon on the inset graph at the bottom of the screen.
- **Display Yield Table** – you can view your yield table by clicking the inset graph at the bottom of the screen.
- **Selecting polygons to view in Map view** – you can select multiple polygons to be displayed on the map. In the navigation tree, simply double click them on (hatched) or off (solid).

7.2 Polygon View Toolbar and Displays

The toolbar expands when you are on the Polygon View Tab but not on other tabs. This toolbar includes the following features:

- **Add Polygon** – used to add a new forest polygon. (The new polygon is attribute data only and will not appear in Map view.)
- **Split Polygon** – used to split an existing forest polygon. (The split is to attribute data only. The original extent of the now split polygon will still appear in Map view, and can be selected

¹ This task can also be accomplished for an entire project through the Edit menu Remove all "Imported .LOT Yields" function




through the Map view. However, the split-off poly area cannot be selected through the map view interface.)

- Add Classification – used to add a new classifier for the forest polygon.
- Rename Polygon – used to rename an existing polygon name.


7.2.1 Information Displays – Small Map, Comments, VRI, Yield Graphs

The following information display buttons are listed along the top right side of the Polygon View tab window, allowing you to toggle on or off various displays of information by clicking them:

- Small Map - The “Small Map” button is used to turn on or off the individual polygon map displayed at the upper right, if you loaded a shp file for forest polygons into Woodlot. This map includes the polygon shape and map label for the forest polygon selected in the navigation tree at left. The grid used is 100m x 100m (= 1ha). Refer also to section 7.8 Map.
- Comments - Comments may be added to each polygon in Woodlot. Click on the “Comments” button to display a comments box section, ready for you to type in. Comments will be saved with the polygon. Unclick the button to hide comments.
- VRI - Key VRI inventory attributes may be displayed or hidden by clicking the “VRI” button on or off. VRI data is base forest inventory data provided by FLNROD, used as a starting point for your timber supply analysis, a reference for updating your polygons, and for other complex analysis such as accounting for MPB dead volume.

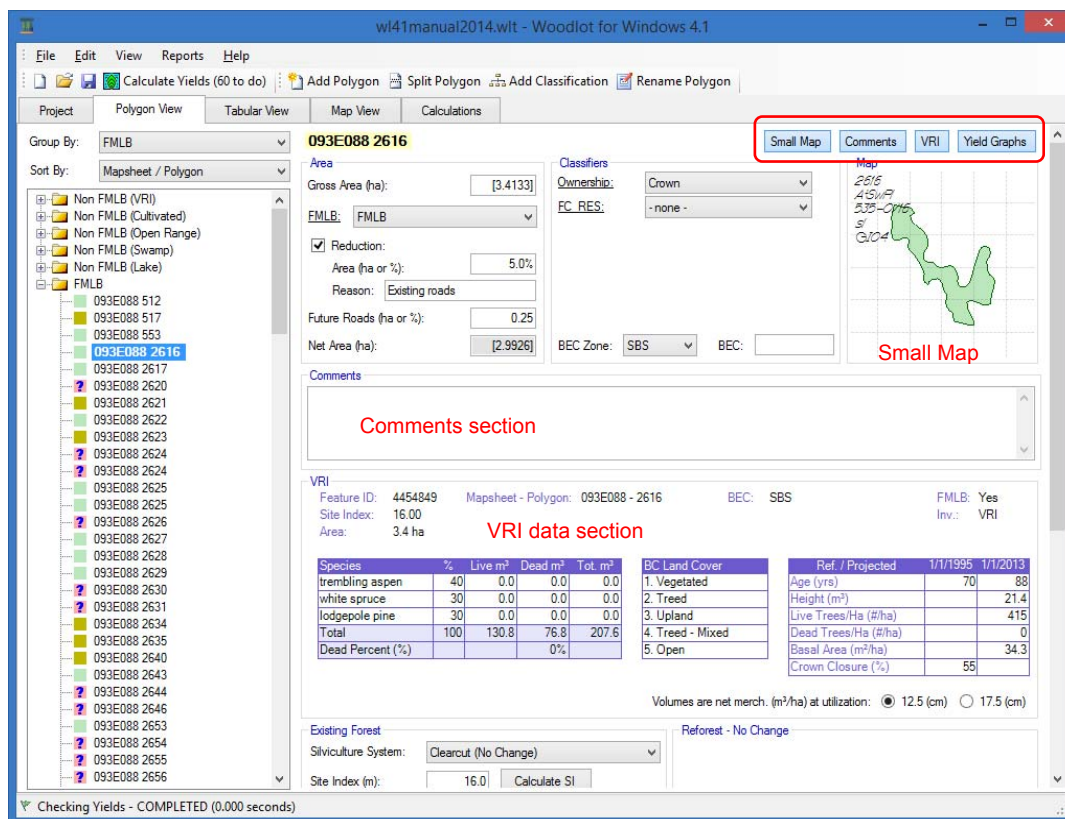

- Yield Graphs - The “Yield Graphs” button will display and hide the small yield graph under your yield type for that polygon below the “Existing Stand” and “Reforest” stand.

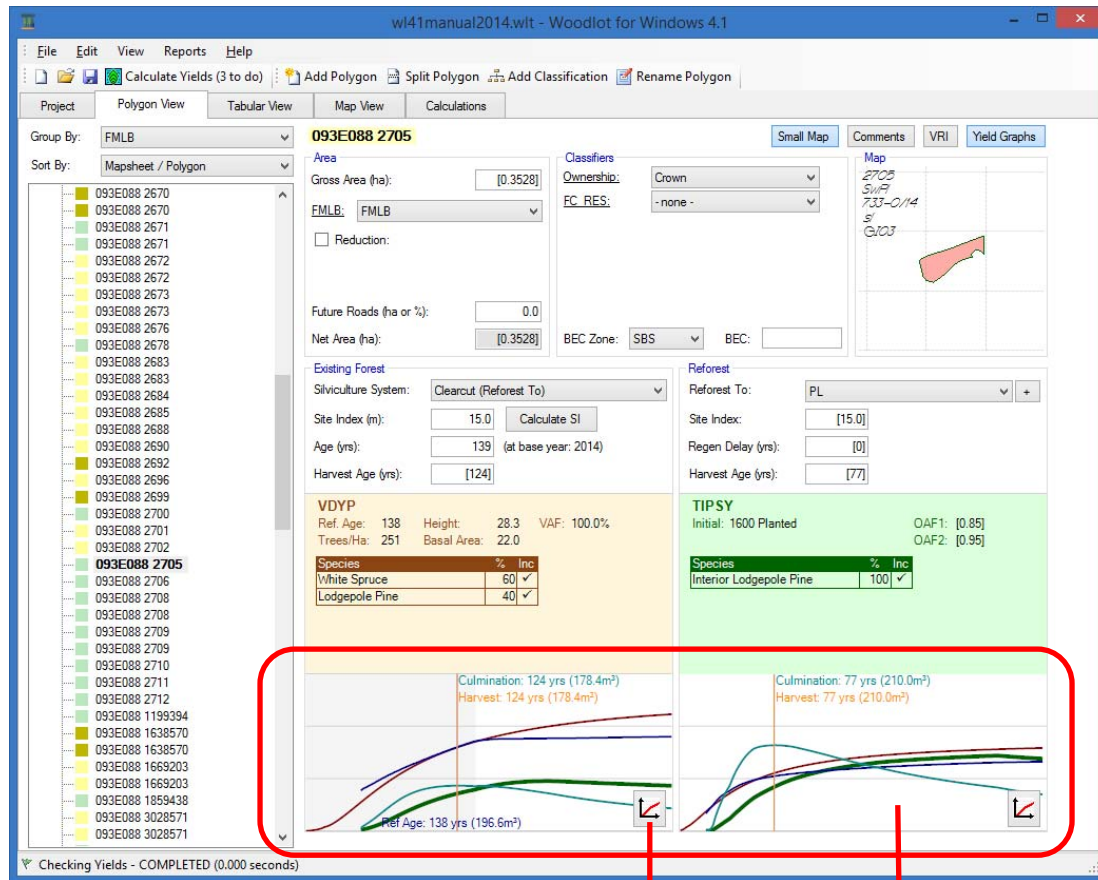

Yield Graph buttons and
summary yield graph
results.


Click on the yield graph
button to display the yield

Click on the mini graph to
display the yield table.



7.3 Navigation Tree

The navigation tree is located along the left side of the Polygon View tab. As you toggle on the list of polygons, the polygon information will display at the right.

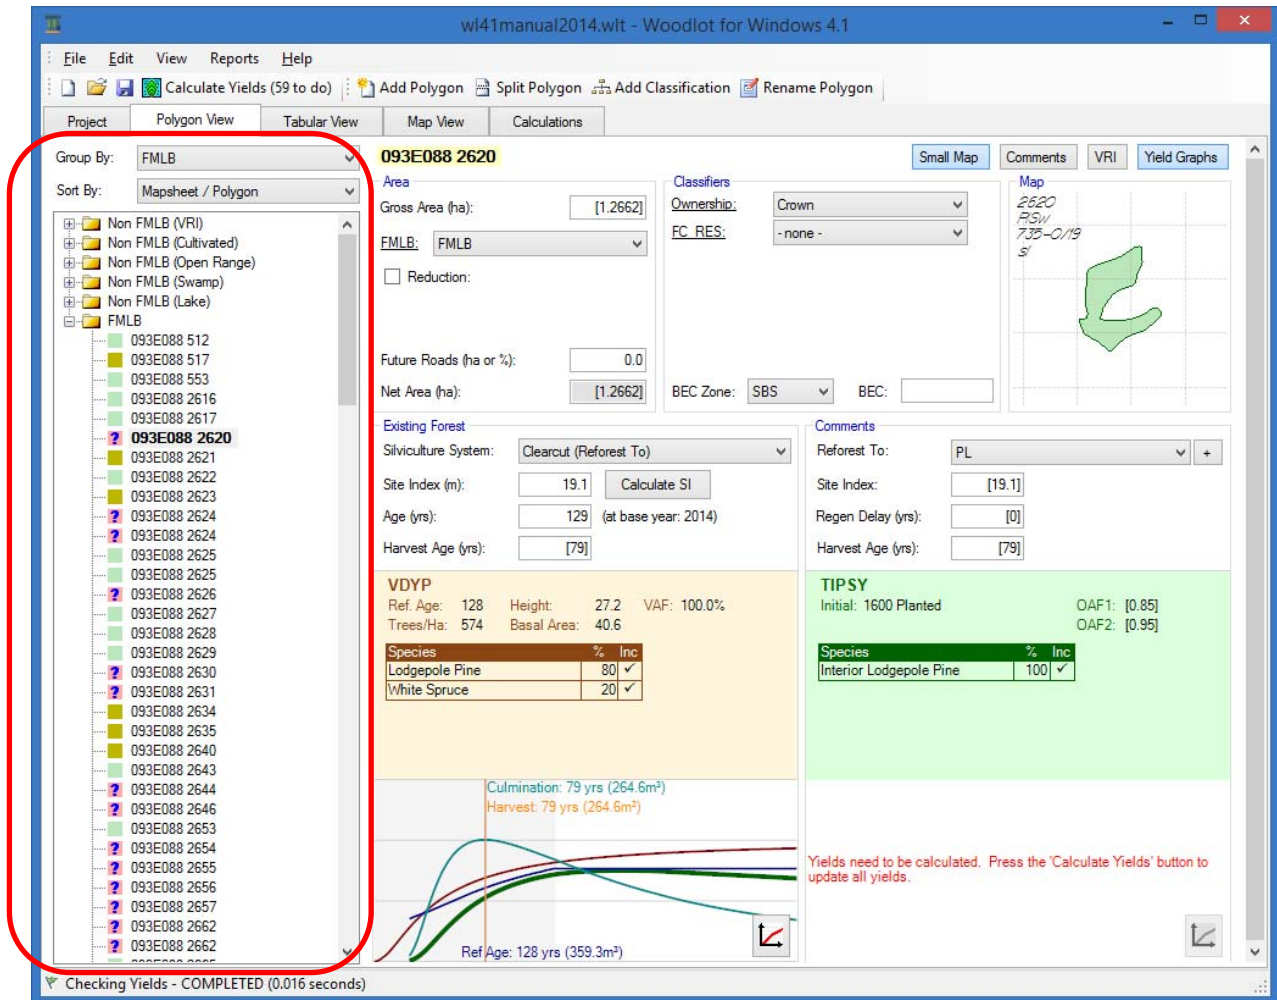

With the navigation tree, you can:

- Quickly move between polygons. The selected polygon number will display at the top of the workspace.
- Display your data by Group. The groups are listed above in the “Group by” list box. Generally, this includes the summary by FMLB, Mapsheet, Ownership, and any classifications you have added. Select on the Group to organize your display list.
- Sort your data. Select on the “Sort by” list box to sort polygons by Mapsheet/Polygon number, Age, or Area, from greatest to least.

To help your work in the Polygon tab, a colour scheme has been added to the polygon icons to describe at a glance the status of yields and polygons in the project. The following legend applies to the icons in the navigation tree. The same general scheme is carried forward to the Tabular View and the Map View tabs.




Icon	Yield Status Legend
	Green - the polygon is forested and available for harvest (harvest parameters have been met). It is part of the FMLB and can contribute to the AAC.
	Yellow - the Existing Forest polygon is not satisfactorily restocked (NSR). This stand will contribute to the AAC if a Reforest stand is assigned to it., otherwise it will have no contribution to timber supply over time.
	? with red background - the polygon is forested but yields need to be calculated or there is an issue with the yield information.
	Mustard brown - the polygon is forested but will not be harvested and will not contribute to the AAC. It either does not meet minimum harvest parameters or has been set to do not harvest. It will contribute to meeting forest cover constraints. This will include NC polygons (or any forest polygons) that have the silviculture system set to "Do Not Harvest". Note: You will need to change the silviculture system to harvest and provide a "Reforest to" regime for the polygon before it will be available for harvest, changing to green or yellow.
	Grey - the polygon is not forested and does not contribute to the AAC or forest cover constraints. It is not FMLB. In the FMLB group of polygons, these polygons are denoted with a "No (reason)", meaning it is not FMLB, followed by the reason.
	Red hatch – the polygon is selected for viewing in the Tabular View and Map View (if a map is available). To select and de-select polygons, double click on their icon in the navigation tree, or on the small map, or right click on the Map view polygon.
092G094	Bold text polygon number – represents the selected polygon you are working on in the workspace. It will also display at the top of the workspace in bold and yellow highlight.

7.4 Summary

You can generate a quick area/volume summary for your woodlot. In the navigation tree, click on a Folder icon to produce a summary table. A more detailed summary is produced in the Woodlot report.

To copy the Summary table to another application such as Excel or Word, navigate to the Edit menu and select "Copy Summary". Paste the table of data in the other application.

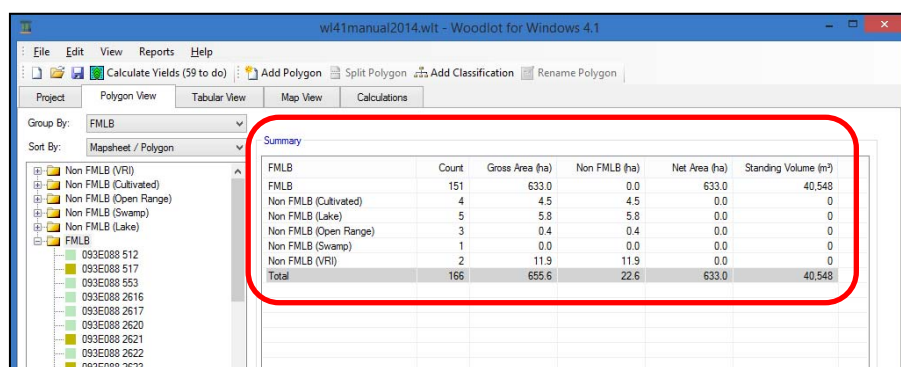

	Count	Gross Area (ha)	Non FMLB (ha)	Net Area (ha)	Standing Volume (m³)
FMLB	151	633.0	0.0	633.0	40,548
Non FMLB (Cultivated)	4	4.5	4.5	0.0	0
Non FMLB (Open Range)	5	5.8	5.8	0.0	0
Non FMLB (Lake)	3	0.4	0.4	0.0	0
Non FMLB (Swamp)	1	0.0	0.0	0.0	0
Non FMLB (VRI)	2	11.9	11.9	0.0	0
Total	166	655.6	22.6	633.0	40,548



7.5 Area

The Area section displays the area attributes for the polygon, including:

- Gross Area (ha) - shown in square brackets if it has been imported. You can override the area by typing over it. (Four decimals are used if data is derived from a GIS to avoid addition errors.)
- FMLB – the classifier of Forest Management Landbase (FMLB) has been included in Woodlot 4, based on VRI terminology.


If the polygon is considered forestland it will contribute to the woodlot timber supply, and the FMLB code used is “Yes”. The polygon icon will be displayed as green if harvest parameters can be met, yellow if it is NSR, or mustard brown if it is forestland but the harvest parameters will not be met. Polygons with forest cover below minimum harvest parameters will not be harvested but will contribute to forest cover constraints.

If the polygon is non-forest it will not contribute to the woodlot timber supply and the FMLB code will be “No” with the reason why it is excluded. The excluded polygon icon will show as grey. These polygons will not contribute to forest cover constraints.

You can override the contribution by selecting on the drop-down list box to reclassify it from Yes to No, or from No to Yes.

You can edit the classifiers and use your own terms. Click on the underlined **FMLB** text to bring up the editing dialogue.

- Reduction – to show an area reduction on your polygon, check the box on ☒. You can make an area reduction (ha) or use a % reduction. If you use a % reduction, the % value will display and be reduced in the Net Area. Remember to add your reason. No volume will be harvested from the area removed from the polygon.
- Future Roads (ha or %) reduction - You can make a reduction for future roads as an area reduction (ha) or use a % reduction. If you use a % reduction, the % value will display and be reduced in the Net Area. Timber will be harvested from the future road area on the next harvest pass, but after that the road area will not grow trees for future harvests.
- Net Area (ha) – the Net Area will be the reduced area after exclusions or reductions. This is the area that will be used in long-term timber supply calculations for this polygon.

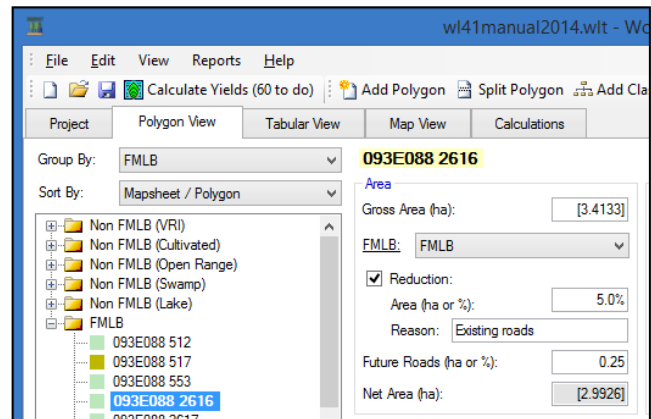


7.6 Classifiers

Classifiers are used in Woodlot 4 to organize data for later reporting and analysis. They can help in summarizing your data, help in analyzing polygons of similar classification, and help to delineate forest cover constraints by polygon. Classifiers are a new addition to Woodlot for Windows software.

Ownership for each polygon is delineated in Woodlot using Classifiers.

In addition to ownership, you may want to distinguish forest management constraints on polygons classified as VQO or Deer Winter Range. The list and constraints are added in the Polygon View tab and activated in the Calculations tab.

Your polygons can be sorted by classification in the navigation tree.

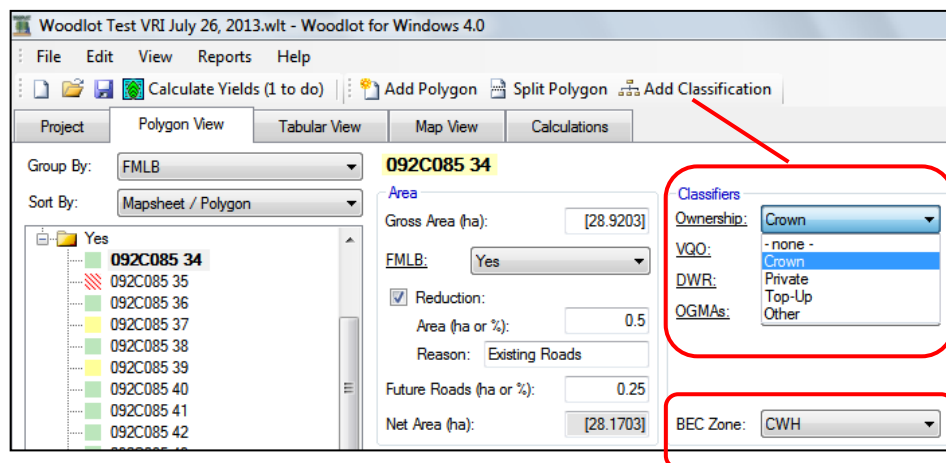


The Classifier section includes:

- Ownership – by default, Woodlot includes a classifier for ownership. You can distinguish whether the polygon is Crown, Private, Top-up, Other or none by selecting one from the drop-down list box.
- Classifications – to add another classifier for your polygons, on the toolbar, click the Add Classification toolbar item and follow the prompts.

To delete the classifier, click on the underlined classifier name to bring up the edit dialogue window; check on the Delete Classifier checkbox.

Note: The Ownership classification cannot be deleted, as it is used to distinguish ownership.

- Classifiers – to add, edit or delete a sub classifier for your classification, click on the underlined classifier name to open an editing window. For example, if you have a VQO classification, you may want to have sub classifiers for Retention or Partial Retention, which

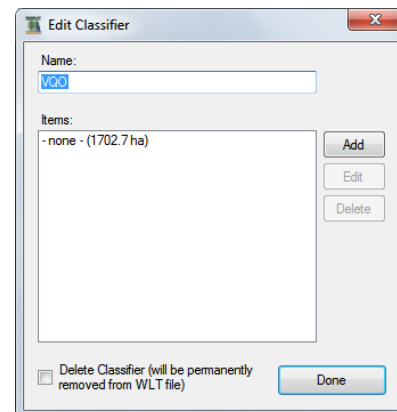

you can apply different cover constraints to later in the Calculations Tab. If you choose the “Delete Classifier” checkbox and return to the Polygon View, the classifier will show up as “(deleted)” and will be removed permanently once you close Woodlot.

Once a classifier has been created in any polygon, it can be activated in other polygons in the woodlot by selecting the classifier from the drop-down list box. Leave them listed as “none” if they are not to be used.

Classifiers can be automatically imported by creating fields that start with either `c_` or `class_` in the inventory data set prior to importing it into Woodlot. A common approach is to use the overlay capabilities of a GIS system to add mapped classifiers such as UWR or visual constraints to inventory data. As long as the class ID fields in the new resultant layer are prefixed with `c_` or `class_`, the classification scheme will be imported into Woodlot 4 with the inventory data in .shp format. Upper case and lower-case classifier names can be used.

7.7 BEC Zone

Another important new addition to Woodlot for Windows software is the addition of the BEC Zone. BEC is now required in VDYP7.

The BEC Zone is displayed in the classifiers section on the Polygon View tab.


The default BEC Zone set on the Project parameters tab is displayed in the drop-down list with “[]” square brackets, and will be used if the square brackets are chosen. Otherwise, you can override the default by manually selecting a BEC zone.

Note that the correct BEC for each polygon will be included in a VRI data set, and can be included in a CSV file if you are importing data.

If the woodlot has multiple BEC zones, and you did not use VRI as source data, you will be needing to check and possibly update the BEC zone for each polygon.

7.8 Small Map


A small map of your forest polygon will display at the far right if you have imported a shp file with graphics. The polygon will be colour coded the same as in the navigation tree. It will include the polygon label. The map can be displayed or hidden by clicking the “Small Map” button.

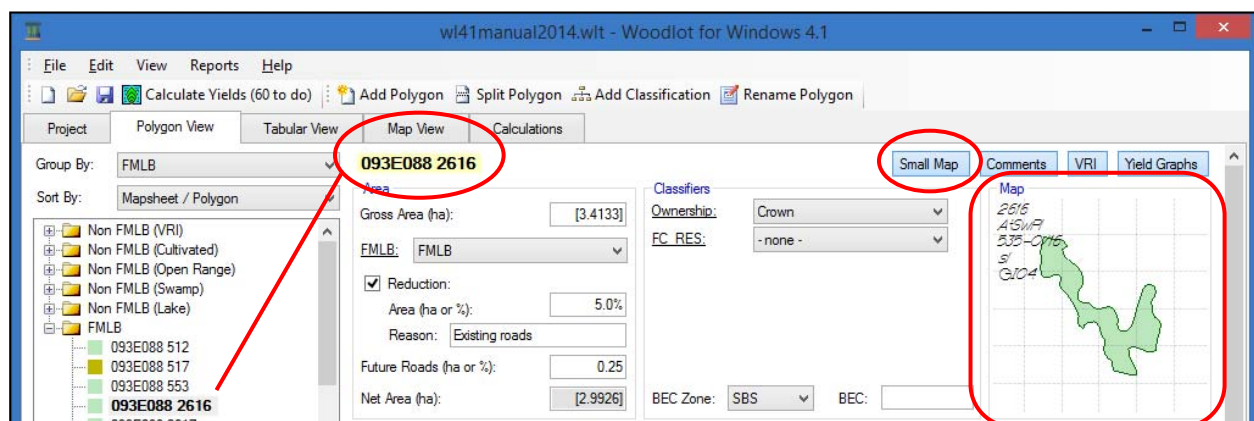

The map will not be displayed if you have not loaded a shapefile, or have not yet linked a shapefile with a non-spatial data set such as a Woodlot 3.2 lot file.

The grid spacing shown in the map measures 100 m x 100 m (1 ha).

Double click the polygon in the map to select it on the Tabular view and the Map view. The polygon and navigation tree icon will show hatched. Double click to unselect the polygon in the views.

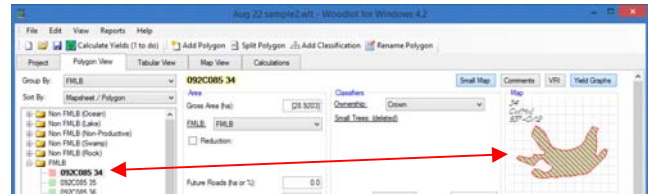


7.9 Existing Forest

The Existing Forest section provides attributes for the existing state of your polygon. This is where you:

- select the intended silviculture system,
- enter basic timber yield information,
- select the growth and yield model/type for your polygon, and
- view results of the yield curve for the current forest.

This is a merging of forest management information previously included on the Polygon Data screen of Woodlot 3.2.

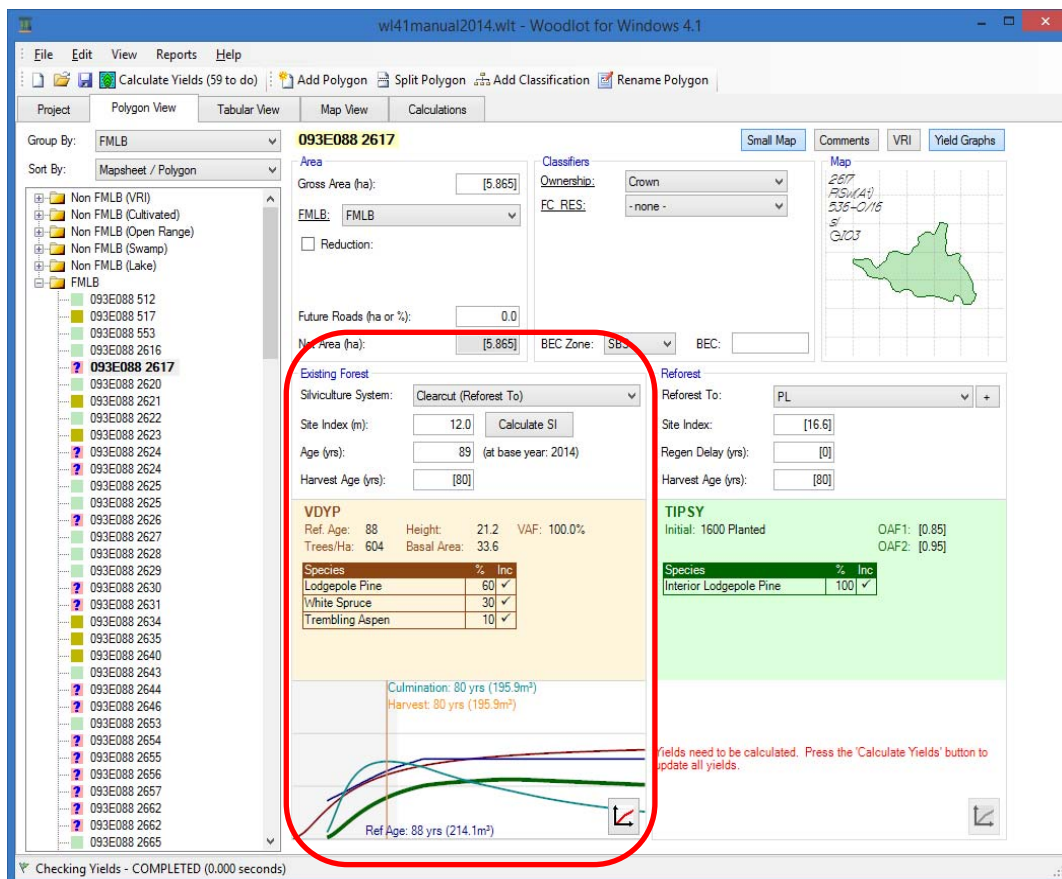

7.9.1 Silviculture System

Select the Silviculture System for your forest polygon from the drop-down list box. The choices are as follows:

- **Do Not Harvest.** For use if you do not intend to harvest the polygon. For example, if it is intended to be a wildlife habitat, long-term retention area or simply not available for harvest. Selecting this will activate the Reforest screen; a “Do Not Harvest” window will display with a description box to add your reason if any. Polygons tagged as Do Not Harvest will still be used to offset forest cover requirements/constraints. (This is a new feature in Woodlot 4; Woodlot 3.2 required the user to set the harvest age to 999 yrs if the harvest was deferred).
- **Clearcut (No Change).** For use if you intend to clearcut and manage the polygon as the same yield type in subsequent rotations. Selecting this will activate the Reforest screen. In the Reforest screen, a “Regen Delay (yrs)” window will display. Enter the number of years for regeneration. This value will auto-populate from the project defaults, but can be changed on a polygon by polygon basis. Year 1 of future stand growth will start at the end of the regeneration period. (Note: Woodlot will default the polygon clearcut volume to 0m³/ha if the volume is left blank in a data file.)
- **Clearcut (Reforest To).** For use if you intend to clearcut and manage the polygon in another forest type or yield type. Selecting this will activate the Reforest screen. See “Reforest” section 7.10 on how to enter your reforestation data. Click the + plus button to display the Reforest to details screen and yield types available, which includes VDYP, TIPSYS, NC, NSR, TASS and custom.
- **Partial Cut.** For use if you intend to do multiple partial removal entries over time to your polygon. Selecting this will activate the Partial Cut window. Enter the partial cut methodology, Removal (%), and Re-entry Period (yrs). These values will auto-populate from the project defaults, but can be changed on a polygon by polygon basis.

The “Average Age” method is the method used in Woodlot 3.2 whereby a partial cut harvest is modeled by reducing average stand age.

For information on default settings used by Woodlot for partial cutting, please refer to Section 6.4 Partial Cut Defaults.

For more on partial cutting in Woodlot 4 and the variables used, refer to Section 6.3 and Appendix 1.



7.9.2 Forest Polygon Information

In the upper portion of the Existing Forest quadrant in the Polygon View tab you enter the following forest information for the current polygon:

- Site Index –enter the site index in m (breast height age 50 years) for the leading species. The Site Index displayed in the Existing Forest and Reforest will be used to derive yields.
- Age (yrs) –age of the leading species of the existing forest polygon at the base year showing on the Project tab. For example, if the base year on the Project tab is 2016 and you know the age of the stand is 100 in 2016, enter 100 years for age for your polygon.

Note that the Base Year entered on the Project tab applies to all polygons in that woodlot. The Base Year in Woodlot for Windows is the year the stand age is determined at, and is shown next to the polygon age in the Polygon View tab.

The screenshot shows the 'Project' tab with 'Project Information' fields. The 'Base Year' is set to 2016. The 'Existing Forest' tab is also visible, showing 'Silviculture System' as 'Clearcut (No Change)', 'Site Index (m)' as 15.0, 'Age (yrs)' as 100 (at base year: 2016), and 'Harvest Age (yrs)' as [not] no volume. Red boxes highlight the 'Base Year' field in the Project tab and the 'Age (yrs)' field in the Existing Forest tab, with a red line connecting them.

If you have any questions on how the Base Year is used, please consult with your Woodlot support contact.

Note: If you are importing data, refer to Section 6.1 for a description of options to deal with multiple aged inventory data. You will want to ensure that the polygon ages displayed in the Polygon View tab are for the Base Year displayed on the Project tab.

- Harvest Age (yrs) – The harvest age will be calculated for you by default as the age at which all your harvest parameters are met or culmination age, whichever is greater. You can override the harvest age by typing over this cell. An age displayed in [] square brackets is the default harvest age, which will be used unless you manually override it.

Note: The harvest age is used to set the earliest age the polygon can be harvested in the AAC calculations. If the polygon harvest is delayed in the calculation past the harvest age, the calculation will use the volume from the actual, older age at harvest.



7.9.3 Calculate Site Index


You can calculate the site index for your forest polygon if you do not know it or wish to calculate it for another reason. Woodlot uses Sindex to derive site index. Sindex is the site index estimating tool used by TIPSy and VDYP7.

Note that once you change the site index the forest polygon will need to have the yield recalculated.

In the Existing Forest screen, click on the “Calculate SI” button to activate the Calculate Site Index dialogue screen. Enter data for your polygon starting with the Leading Species, then either Breast Height Age (yrs) or Total Age (yrs), and the height (m) of the leading species.

Site index BH50 will be calculated for the polygon (shown in green), and will replace the site index in the existing forest.

The polygon will be marked in the navigation tree icon with a “?” signifying that the yield needs to be recalculated for that polygon.

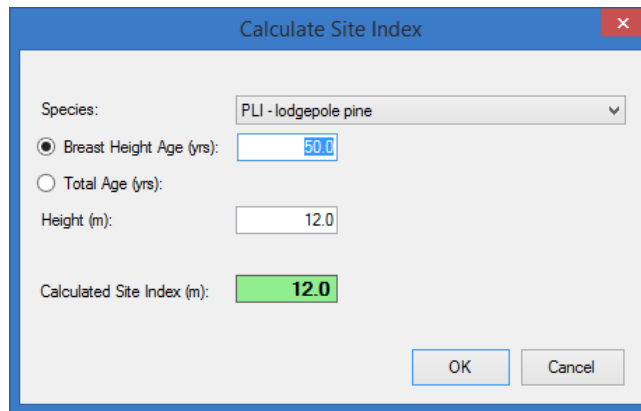


The image shows a 'Calculate Site Index' dialog box with a blue title bar and a red close button. It contains the following fields and controls:

- Species:** A dropdown menu showing 'PLI - lodgepole pine'.
- Breast Height Age (yrs):** A radio button that is selected, followed by a text input field containing '50.0'.
- Total Age (yrs):** An unselected radio button.
- Height (m):** A text input field containing '12.0'.
- Calculated Site Index (m):** A text input field containing '12.0', which is highlighted with a green background.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom right.



7.9.4 Yield Type and Yield Settings

To open the Yield Settings window, single-click on the coloured Yield Type section in the Polygon View tab. Likewise, to open the Yield Table, click the yield curve graph.

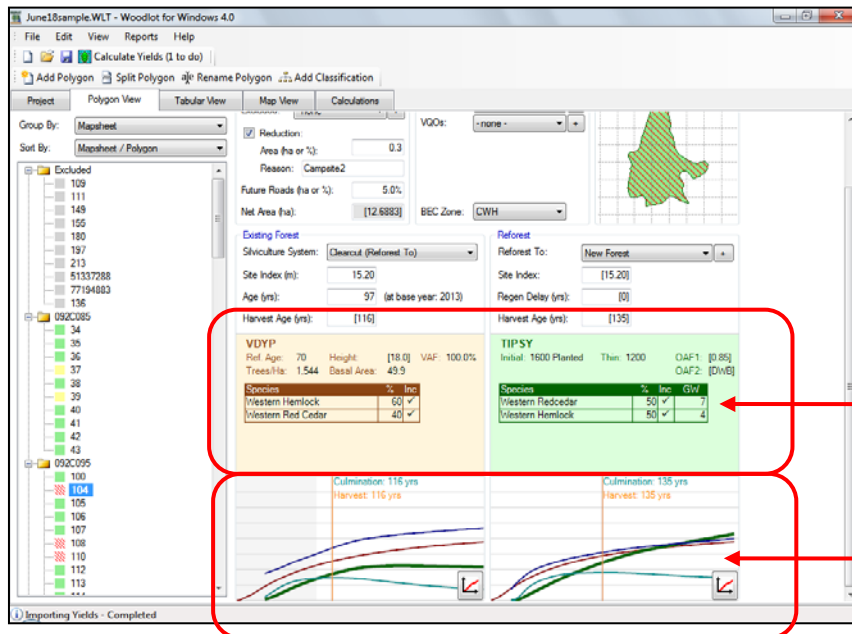

To open the **Yield Settings** window, click on one of the coloured Yield Type sections.

To open the **Yield Table** window, click on one of the yield curve graphs.

The Yield Setting window and the summary is colour coded by yield. To edit and update yields, you will first need to update the yield settings.

In the Yield Settings window, select a yield type and enter or update the yield data. The stand age, site index and BEC are displayed at the bottom of the window for easy reference. Click Save Changes when you have entered your data and are ready to calculate your yields.

The Yield Types include VDYP, TIPSY, NC, NSR, TASS, and Custom as follows.

Yield Name: 092C095 104 (Existing Forest)

Yield Type: VDYP

Species Name	Comp (%)	Include	Utiliz. (cm)
HW - western hemlock	60	☒	12.5
CW - western redcedar	40	☒	12.5
Custom		☒	

Reference Age (yrs): 70 VAF: 1.00

Reference Height (m): [18.0]

Estimate yield using: ☒ Basal Area & TPH ☐ Crown Closure (FIPSTART)

Basal Area (m²/ha): 49.94

Trees Per Hectare (#/ha): 1544

VDYP Utilization: [2G - Second Growth]

Current Forest: Age = 97 Site Index = 15.2 BEC = CWH

Save Changes Cancel

VDYP Yields

VDYP7 is used in Woodlot 4. VDYP polygons will display as a light brown (see above example). Data required includes:

- Species - selected from the pick list. Species % composition must add to 100%. Double click on the last species % to auto update to 100%. Cells will display in red if they do not add to 100%.
- Utilization level - selected at the bottom and displayed next to the Include check box by species. Utilization levels include 12.5 cm dbh and 17.5 cm dbh, based on FLNROD standard utilization levels used in TSRs. Utilization levels can be selected also in the Project tab. (Note: If a custom utilization level or profile is required, you can create one by copying, renaming and editing one of the utilizations *.dat files found in C:\Program Files\Woodlot for Windows 4\Woodlot)
- Include species - checked on to harvest them and utilize their volume in the harvest calculation; uncheck if you wish to harvest but not utilize their volume in the harvest calculation (for example, some locations may cut the deciduous species as part of the harvest process but are not expected to utilize the volume).
- Reference Total Age (yrs) – age of the stand at the reference year. You will also supply either Basal Area and Trees per Hectare, or Crown Closure at this reference year to VDYP 7.
- Reference Height (m) - Reference height is calculated in Woodlot by default (shown by [] square brackets) using Sindex. Sindex is a model, built into Woodlot 4 which is used to generate reference heights for a given reference age and site index. You can override the default by typing over the cell if you have better site information.
- Volume Adjustment Factor (VAF) - Assumed to be 1.00 unless you have better information. The VAF scales the volume for all species up or down by that amount. For example, a VAF of 1.10 would scale the volumes by 110%.
- Note: VAF has no impact on volume prediction for some young stands. If you wish to adjust the predicted volume of a currently young stand to align with observed values, you may have to change Reference Age and Crown Closure to achieve the desired adjustment.
- “Estimate Yield Using” – in this section, select the radio button to determine how VDYP should calculate your yields. Two methods are available in VDYP7, either using Basal Area & TPH, or using Crown Closure. Both require data at your stand reference age.

Yield Settings

Yield Name: 093E088 2616 (Existing Forest)

Yield Type: VDYP

Species Name	Comp (%)	Include	Utiliz. (cm)
AT - trembling aspen	40	☒	12.5
SW - white spruce	30	☒	12.5
PL - lodgepole pine	30	☒	12.5
		☒	
		☒	
		☒	

Reference Total Age (yrs): 88 VAF: 1.00

Reference Height (m): 21.4

Estimate yield using: ☒ Basal Area & TPH ☐ Crown Closure (FIPSTART)

Basal Area (m²/ha): 34.3

Trees Per Hectare (#/ha): 415

VDYP Utilization: 2G - Second Growth

Current Forest: Age = 89 Site Index = 16.0 BEC = SBS

Save Changes Cancel

Basal Area & TPH method (radio button) – Select and use Basal Area (BA) and Trees per Hectare (TPH) at the stand reference age if this data is available. This is the



recommended method in VDYP7, as BA and TPH are measures of stand density, which are used to estimate yields, and is considered the more accurate method. Be sure to use the BA and TPH at the stand reference age.

Alternately, if BA and TPH are not available, you can use Crown Closure as follows.

Crown Closure method (radio button) – If BA & TPH are not available, select and use Crown Closure at the stand reference age. This will trigger the “FIPSTART” function in VDYP7 to estimate yields. Crown closure is used in VDYP7 as a proxy to estimate basal area, which is then used to project yields.

If you select this method and have not entered a Crown Closure, Woodlot will use a Ministry default Crown Closure for you, and will display [] square brackets; you can override the default value by typing over the cell if you have better information. Default Crown Closure is usually based on a mature stand, so if you have a young stand, typically < 50 yrs old, you will need to enter the correct Crown Closure or the yield estimate will be wrong. In any case, it is not recommended to use the Ministry default Crown Closure unless it is reflective of the stand reference age, such as old growth types.

Note I: If you are using the Crown Closure method be sure to use the Crown Closure at the stand reference age, as VDYP 7 uses the inventory attributes at the reference age. This differs from earlier versions of Woodlot and VDYP 6 wherein the Crown Closure used was estimated CC at harvest age.)

Note II: The user may wish to review the VDYP 7 predicted volumes at harvest for stands currently < 50 years old. Crown closure of young stands is difficult to estimate or measure, and a small change in estimated crown closure for a young stand may have a significant impact on predicted harvest age volume. The user may wish to compare VDYP predicted volume at harvest age with known volume at harvest age from cruise or scale records, including waste.

The crown closure at stand reference age can be adjusted to align VDYP predicted volumes with known harvest volumes.

In some cases, adjustment of both stand reference age and crown closure to the values of the pre-harvest stand may be required to generate a predicted volume that aligns with known harvest volume.

The user should document and support any such changes from the VRI data set on a polygon by polygon basis, and expect to provide a rationale for the changes in their Management Plan.

For more information on VDYP7 and the yield estimating options, please refer to Section 4.6, to the VDYP7 Help, or contact the Forest Analysis and Inventory Branch, Stand Development Modeling section.



TIPSY Yields

TIPSY 4.3 is used in Woodlot 4 to estimate yields of managed stands. Managed stands are typically planted, spaced or fertilized stands. They also include naturally regenerated stands that have been managed to a free growing state or with stocking control. Typically, these stands are less than 50 years' age, and generally, they include all recently reforested sites. TIPSY polygons will display as a light green. Data required includes:

- Species - selected from the pick list. Species % composition must add to 100%. Double click on the last species % to auto update to 100%. Cells will display in red if they do not add to 100%.
- Utilization level - selected in the Project View tab and displayed next to the Include check box by species. TIPSY utilization is assumed to be 12.5 cm dbh for all species. If you wish to use a different utilization level, review the discussion in Section 6.7
- Included species - checked to include volume in harvest volume calculation. Uncheck if you do not wish to utilize in harvest volume calculation.
- Regen Method – Natural, Planted or Clumped.
- Initial Density (#/ha) –Initial stocking level following reforestation.
- Reference Height (m). Reference height is calculated by default (shown by [] square brackets) using Sindex (internal to Woodlot). You can override the default by typing over if you have better site information.
- OAF1 and OAF2 – Operational Adjustment Factors, provided as defaults in [] square brackets. Can be overridden by typing over the cells. (Note: You should be prepared to provide a rationale is you chose to use something other than the defaults, which are usually OAF1 = 0.85 and OAF2 = 0.95. Refer also to Section 6.3 or TIPSY Help for more on TIPSY OAFs.
- Pre-commercial thin (Optional) – Activate by selecting the checkbox, and enter your thinned to density (# stems/ha). Check the TIPSY Help if any questions on pre-commercial thinning in TIPSY.
- Commercial Thin (Optional) - Activate by selecting the checkbox and entering the data. Note: Commercial Thin is only available for Fd on the Coast and PI in the Interior. Check the TIPSY Help to determine applicability before you use this feature.
- Fertilize (Optional) - Activate by selecting the checkbox and entering the data. Check the TIPSY Help if you propose to use this feature.

092C095 104 (Existing Forest) - Yield Settings

Yield Name: 092C095 104 (Existing Forest)

Yield Type: TIPSY

Species Name	Comp (%)	GW (%)	Include	Utiliz. (cm)
HW - western hemlock	60	7	☒	12.5
CW - western redcedar	40	4	☒	12.5
			☒	
			☒	
			☒	

Regen Method: Natural OAF1: [85]

Initial Density (#/ha): 1600 OAF2 (or "DWB"): [DWB]

☒ Pre Commercial Thin - Density (#/ha): 1200 ☒ Fertilize - Age (yrs): 0

☒ Commercial Thin - Height (m): - Density (#/ha): 0 ☒ Genetic Worth

Current Forest: Age = 97 Site Index = 15.2 BEC = CWH

Save Changes Cancel



- Genetic Worth % (Optional) - Activate by selecting the checkbox, and enter data for each species next to the composition %. Check the TIPSy Help if you propose to use this feature.

NC – Non Commercial Cover

The NC polygons will display as a light blue. This feature is included for use for stand conversions, and non-commercial or damaged site conversions back into productive forest. For conversions back to productive forest, ensure you activate the Reforest screen by selecting the "Clearcut (Reforest To) silviculture system. You can use either TIPSy or VDYP yield predictions for the future forest. Data required includes:

- Harvest in (yr.) – the number of years from present that you intend to harvest the volume on the current stand as part of the stand conversion.
- Net Harvest Volume (m³) – your estimate of the net merchantable volume you expect to recover on the conversion harvest.
- Deciduous Percent (%) – the proportion of merchantable deciduous on the stand at the conversion harvest.
- Heights (m) – average stand height, for use in meeting forest cover constraints of the stand.
- Description – enter a description if any of the stand.

NSR – Not Satisfactorily Restocked

NSR polygons can be added, and will display as a light yellow.

Some stands may be currently considered NSR, in which case you can use this feature to track them in the beginning of your analysis.


- Restock in (yrs) - enter the number of years when you intend to fully restock the stand. This will be akin to setting a regen delay, and the start of the new forest cycle.

It is recommended that you activate the Reforest screen using the TIPSy yield type for these polygons if the new stand will be/was established by planting or natural regeneration and is considered managed. If you will manage the stand using partial cutting, then you will need to use the VDYP yield type.



TASS – Tree and Stand Simulator Yields


this is a future feature and currently not active in Woodlot 4. This will display as a light blue window.

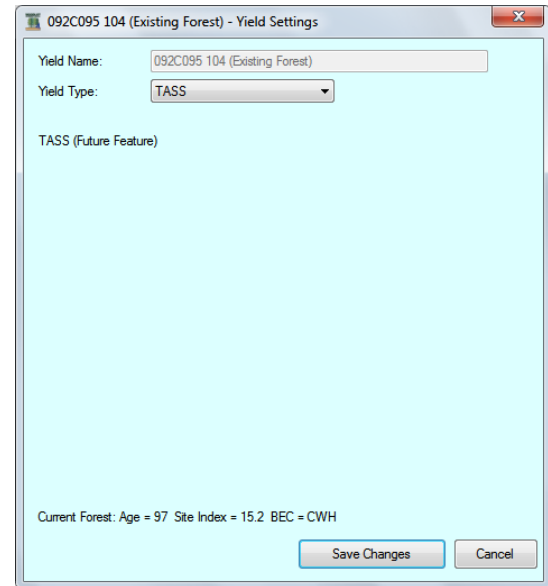

Custom Yield

You can import a custom yield table for your polygons. This is a new feature in Woodlot 4. It does not require the yield to be produced in Woodlot.

From the Yield Type drop down, click on Custom. This will display a blank light magenta window, ready for importing your data or displaying the imported data.

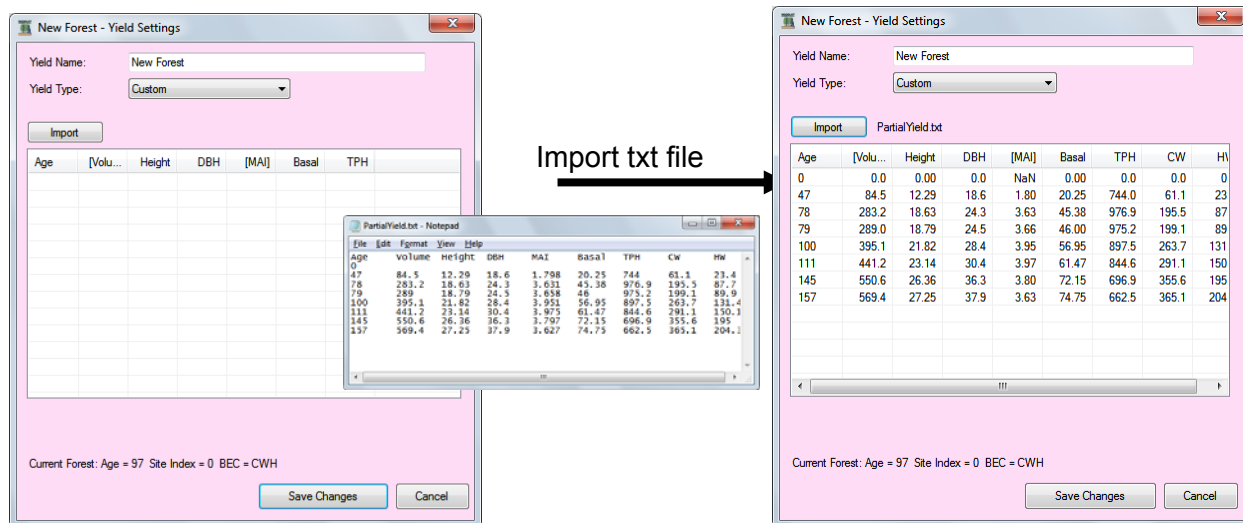


You will need a tab delimited text file with the following column headers and data to import into Woodlot 4. Note: [] square brackets denote fields where header names are required but for which data is optional, as Woodlot will calculate this number from the rest of the data.



Only data in the required format will be imported, including:

- Age – age increment in years (required data).
- Volume – total net volume m³/ha. Data for this field is optional as Woodlot will calculate the total volume from your species volumes and use this as the total net Volume m³/ha. (Optional data).
- Height – in meters (required data).
- DBH – diameter at breast height in cm (required data).
- MAI – mean annual increment, m³/ha/yr. Data in this table field is optional as Woodlot will calculate the MAI from the total volume, by age. This field must be included in table structure even if you do not populate it with your own data.
- Basal Area in m²/ha (required data).
- TPH – trees per hectare (required data).
- Species 1 net volume m³/ha – the header name will be the VRI species code (for example, CW = western redcedar) and the data will be the net volume m³/ha for that species. (Required data).
- Species 2 to Species 6 - similar data to Species 1 as above (required data).

The following is an example of a tab delimited text file used for importing a custom yield table to Woodlot 4:

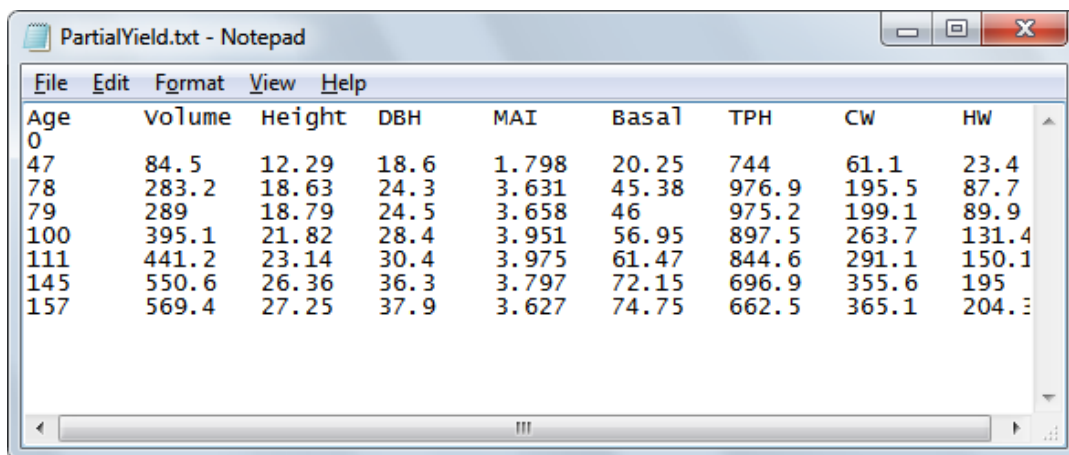

Age	volume	Height	DBH	MAI	Basal	TPH	CW	HW
0								
47	84.5	12.29	18.6	1.798	20.25	744	61.1	23.4
78	283.2	18.63	24.3	3.631	45.38	976.9	195.5	87.7
79	289	18.79	24.5	3.658	46	975.2	199.1	89.9
100	395.1	21.82	28.4	3.951	56.95	897.5	263.7	131.4
111	441.2	23.14	30.4	3.975	61.47	844.6	291.1	150.1
145	550.6	26.36	36.3	3.797	72.15	696.9	355.6	195
157	569.4	27.25	37.9	3.627	74.75	662.5	365.1	204.3



7.9.5 Convert Dead Stands to Non-Commercial Stands


Following extensive natural disturbance in a woodlot, such as from Mountain Pine Beetle, you may wish to model the AAC implications of salvage harvest and conversion of the dead stands to a new forest or an advanced regeneration forest.

If your data set contains the VRI Dead Percent attribute, you can use the Convert Dead Stands to Non-Commercial tool to help set up the harvest and stand conversion of the high mortality existing stands.


The tool will select all stands with more than a user specified mortality level, and reclassify them as “non-commercial” yield type in Woodlot. The existing forest will retain the volume and other attributes provided from the VRI inventory.

When you run the AAC calculation, NC polygons that have been assigned a silviculture system and reforestation regime will be moved to the top priority for harvest, available at the earliest possible time. Note that the polygon will not be harvested if the silviculture system has not been set to “harvest”, and volume will not accumulate until the year the stand is reforested.

To activate this feature, navigate to the Edit menu, select “Convert Dead Stands to Non-Commercial”.

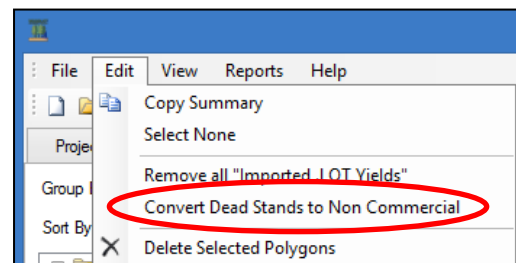

A “Convert to NC” dialogue window will appear. Enter the minimum percent dead volume in a polygon that will trigger the batch updating process. Polygons with more than or equal to this level of dead volume will be updated. Dead percent is a standard VRI data set attribute.

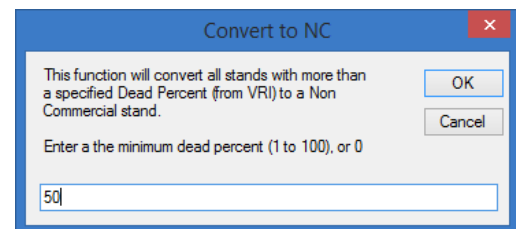

Following the conversion to non-commercial:

- The stand will not grow further volume until harvest and reforestation have been carried out.
- Current silvicultural system will be defaulted to Do Not Harvest. The user will need to change this to Clearcut - Reforest To.
- Once the Silviculture System is changed, the Live Volume will be identified as available for harvest at the earliest possible time (Harvest In: 0 years). If you believe that there is a feasible opportunity to salvage the dead volume, double click the purple NC area and edit the Net Harv Volume listing to include the portion of the dead volume you believe will be salvaged.
- The user will need to provide Reforest To information for the polygon.



- The purple NC section will appear in the Polygon View window in place of the usual VDYP information, showing the harvest attributes for each polygon.
- Icons in the navigation tree will change to the mustard brown for NC.

Details and discussion follow.

After a stand has been converted to Non-Commercial, the yield model type will change from VDYP to Non-Commercial. The purple NC section will appear, replacing the usual VDYP information, showing the harvest attributes for each polygon, including live volume, dead volume, and volume to be harvested.

Woodlot populate the volume and stand attributes from the VRI inventory data.

Default harvest volume is live volume. You can adjust harvest volume to include merchantable dead volume in the Yield Settings (see below).


Icons in the navigation tree will change to mustard brown for NC until you set the silviculture system and reforestation regime (mustard brown = polygon will not be harvested).

The user must enter the appropriate "Silviculture System" and "Reforest to" regime for each NC polygon. This future stand description process was not automated in Woodlot because it requires judgments that are best made by a forest professional undertaking the analysis.

Silviculture system will often be "Clearcut - Reforest To". When this choice is made, Woodlot will copy the current stand species composition to the Reforest To window. The user can edit these values as desired.

If TIPSYS is used to model future yields, the program will populate all the data fields required to calculate future yields. The user should review the defaults to be sure they agree, or edit as required.

If VDYP is used to model future yields, the user will have to fill in basal area, trees/ha, reference total age and reference height. For yield modeling purposes, the trees/ha value should be total stems, including both current live and dead stems, as this total represents the growth potential of the site. These numbers can be transcribed from the VRI window of information for the polygon.

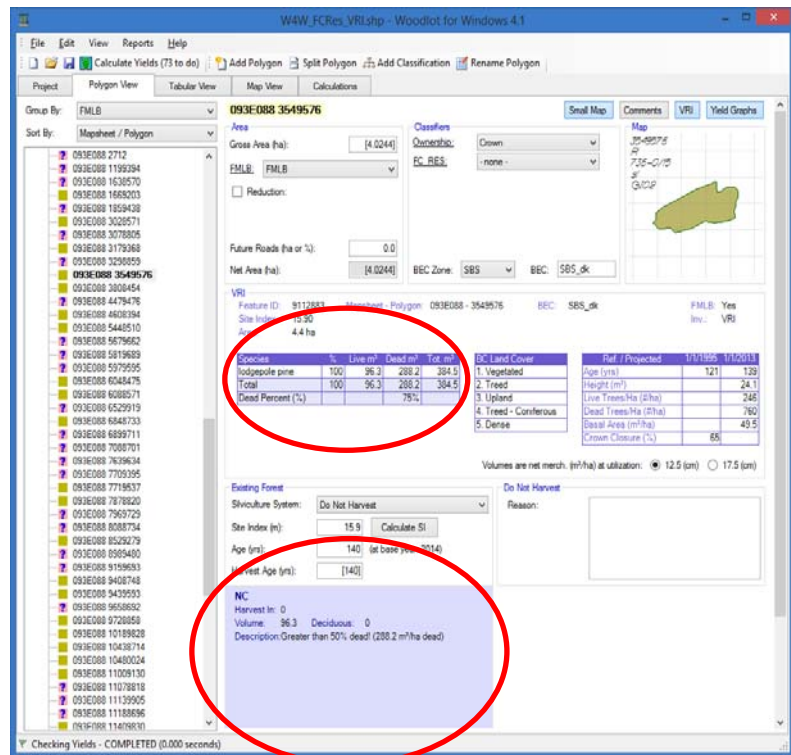

Once you set the silviculture system, the icon will change from mustard brown to “?”. Add a reforest to stand, recalculate the yield for this polygon. The icon will change to yellow in the navigation tree. Yellow represents NSR, as the stand is assumed to be NSR until it is cleared and reforested.

Adding a silviculture system to the polygon will make the current standing live volume available for harvest. To adjust the current harvest attributes and harvest volume of any NC polygon, click the purple NC screen to activate the polygon “Yield Settings” dialogue window. Harvest attributes include Harvest in (yrs), Net Harv. Volume (m³/ha), Deciduous Percent %, and target Height (m). By default, Woodlot will set the net harvestable volume to the live volume only, which you can change.

By default, Woodlot will set the net harvestable volume m³/ha to the live volume only in the polygon (per the VRI data) because the inclusion and merchantability of the dead volume is a judgment call. If you believe that all or a portion of the dead volume will be sold at harvest, add the appropriate dead m³/ha to the live volume and enter this total m³/ha in Net Harv. Volume (m³/ha). For your reference, the dead volume is displayed on the NC yield type on the Polygon View tab and also under the VRI view.

093E088 3549576 (Existing Forest) - Yield Settings

Yield Name: 093E088 3549576 (Existing Forest)

Yield Type: NC

Harvest in (yrs): 0

Net Harv. Volume (m³/ha): 96.3

Deciduous Percent (%): 0

Height (m): 0.0

Description: Greater than 50% dead! (288.2 m³/ha dead)

Current Forest: Age = 140 Site Index = 15.9 BEC = SBS

Save Changes Cancel

When you run the AAC calculation, NC polygons that have been assigned a silviculture system and reforestation regime will be moved to the top priority for harvest, available at the earliest possible time. Note that the polygon will not be harvested if the silviculture system has not been set to "harvest", and volume will not accumulate until the year the stand is reforested.


To ensure that the polygon will be harvested and will contribute to your AAC, ensure you set up the harvest assumptions in the NC yield type.

Refer also to Section 7.9.4 Yield Type and Yield Settings for more information on the silviculture system and the future forest regeneration scenario settings.



7.9.6 Yield Curves and Yield Tables


At the bottom of the Polygon View screen is a yield curve summary for both the Existing Forest and the Reforest To sections. It will display as a set of mini curves if the yields have been calculated and blank if no yield has been calculated. It will display the culmination age and harvest age. Complete curves and tables are available as follows.

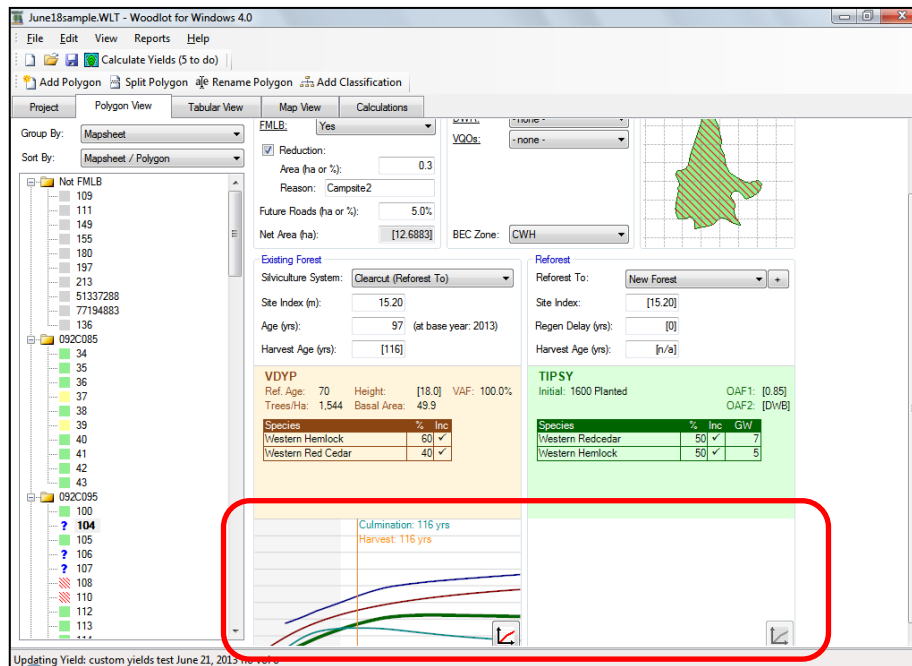

Yield Curve Graphs

To view the yield curve graph, click the Plotsy icon (at the bottom right of the small graph located below the yield data table). This will activate and display the graphing program "Plotsy" with the yield curves. The yield curve graph can be saved and managed in Plotsy.

If you have any questions about using these graphs, please refer to the toolbars in Plotsy and the Plotsy Help. Plotsy is a powerful FLNROD graphing utility available in TIPSy and can be used to overlay multiple graphs, copy graphs for reports, print, etc.

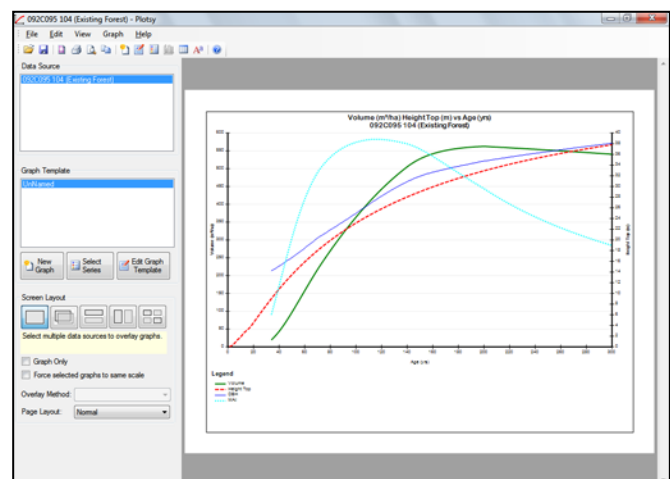

Yield Tables

To view tabulated yield data, click anywhere on the small graph section. This will bring up the Yield Table window, which has a small toolbar, an upper header section and a lower table section.

The upper header section is used to display issues in the data or results.

The lower table section is used to display output results. The culmination age will be highlighted.

You can view and toggle between output and input data. Click the toolbar item from “Output Data” to “Input Data” to display data that was used in creating the yield curves.

Age (yr)	Volume (m³/ha)	Height (m)	DBH (cm)	MA (m³/ha/yr)	Deciduous (%)
102	421.1	23.39	30.2	4.128	0.000
103	425.5	23.52	30.5	4.131	0.000
104	429.9	23.65	30.7	4.134	0.000
105	434.2	23.78	30.9	4.135	0.000
106	438.6	23.91	31.1	4.138	0.000
107	442.9	24.03	31.3	4.139	0.000
108	447.0	24.16	31.5	4.139	0.000
109	451.1	24.28	31.7	4.139	0.000
110	455.2	24.40	31.9	4.138	0.000
111	459.3	24.52	32.1	4.138	0.000
112	463.3	24.64	32.3	4.137	0.000
113	467.2	24.76	32.5	4.135	0.000
114	471.1	24.87	32.7	4.132	0.000
115	475.0	24.99	32.9	4.130	0.000
116	478.8	25.10	33.1	4.128	0.000
117	482.6	25.22	33.3	4.125	0.000
118	486.4	25.33	33.5	4.122	0.000
119	490.1	25.44	33.7	4.118	0.000
120	493.7	25.55	33.9	4.114	0.000

To copy the table to memory for pasting to another application such as Excel, click “Copy Table” from the Toolbar.

Click the Plotsy icon if you would like to display the Yield Curve graph.

Information Messages and Error Messages from VDYP and TIPSy

A red message is displayed below the Existing Forest and Reforest section if the yield curve has not been calculated or if there are errors in creating the yield curve. Follow the prompts provided.

(Note: VDYP7 and TIPSy each have their own set of error messages generated if there are issues unrelated to Woodlot. If triggered, these error messages are displayed in the information message box below the yield results. Additional information on the error message may be available in the Help for VDYP and TIPSy, or by enquiring with the specialists at Forest Analysis and Inventory Branch.)

W41manual2014.wit - Woodlot for Windows 4.1

File Edit View Reports Help

Project Polygon View Tabular View Map View Calculations

Group By: FMLB Sort By: Mapsheet / Polygon

Calculate Yields (59 to do) Add Polygon Split Polygon Add Classification Rename Polygon

Gross Area (ha): [1.0617] WTR: WTR FC RES: WTR

Reduction: ☐ Future Roads (ha or %): 0.0 Net Area (ha): [1.0617] BEC Zone: SBS BEC: [not]

Existing Forest: Clearcut (Reforest To) Site Index (m): 17.6 Calculate SI Age (yr): 104 (at base year: 2014) Harvest Age (yr): [104]

NC Harvest In: 0 Volume: 76.1 Deciduous: 0 Description: Greater than 50% dead! (157.7 m³/ha dead)

Comments: Reforest To: PL Site Index: [17.6] Regen Delay (yr): [0] Harvest Age (yr): [not]

TIPSy Initial: 1600 Planted OAF1: [0.85] OAF2: [0.95]

Species: Interior Lodgepole Pine % Inc: 100


Non Commercial

Yields need to be calculated. Press the 'Calculate Yields' button to update all yields.

Checking Yields - COMPLETED (0.000 seconds)

7.10 Reforest

The Reforest section is used to select attributes for the new forest you plan to establish after harvesting. To activate the Reforest section, select Clearcut (Reforest to) in the Existing Forest section under Silviculture System.

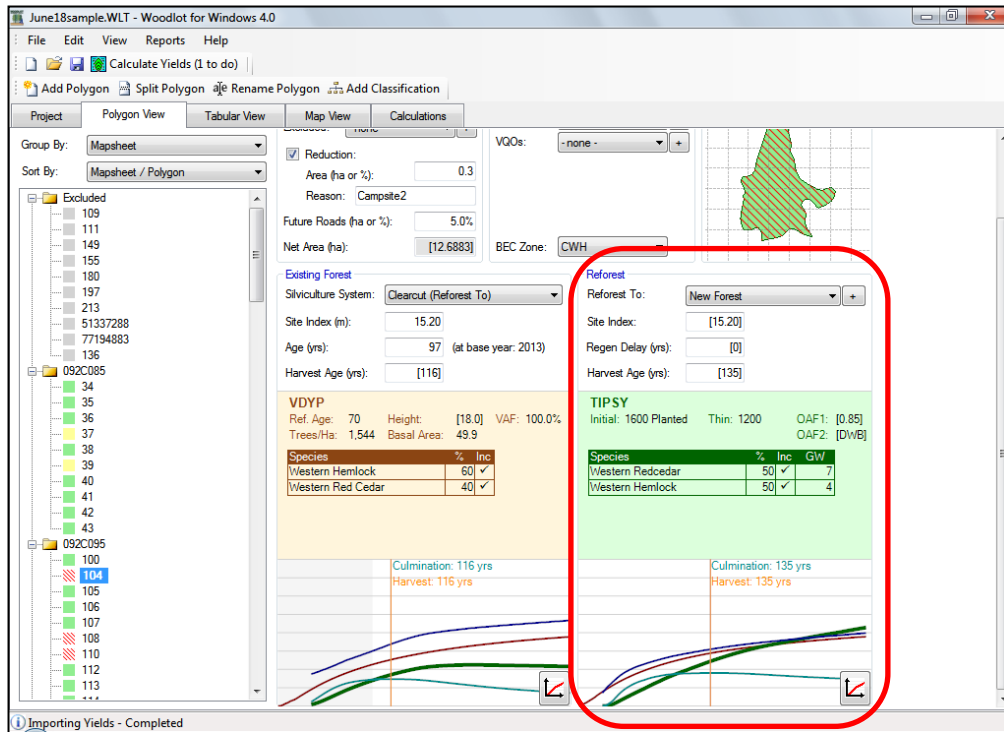

To activate the Yield Settings for the new forest, click either the + plus button or click the Yield type screen. This will bring up the Yield Settings window.

- Yield Settings - Refer to Section 7.9.3. Yield settings work similarly in the Existing Forest and Reforest sections. You can rename the Yield Name in Reforest as described below.
- Reforest to: "Yield Name" - you can create one or many custom sets of reforestation parameters that can be used on similar polygons. Type your yield name in the box and Save Changes. The Yield Name will display in the Reforest to list box and this set of reforestation parameters can be selected for use in other polygons.
- Site Index –enter the site index in m (breast height age 50 years) for the leading species. As a default the site index is copied from the **Existing Forest** section - this value can be manually overwritten.
- Regen Delay - the default value is copied here from the Project Tab panel - this value can be overwritten manually.
- Harvest Age (yrs) – The harvest age will be calculated for you by default as the age at which all your harvest parameters are met or culmination age, whichever is greater. You can



override the harvest age by typing over this cell. An age displayed in [] square brackets is the default harvest age, which will be used unless you manually override it.

Note: The harvest age is used to set the earliest age the polygon can be harvested in the AAC calculations. If the polygon harvest is delayed in the calculation past the harvest age, the calculation will use the volume from the actual, older age at harvest.

- Yield Curves and Yield Tables – refer to section 7.9.4. Yield curves and Yield Tables work the same in both Existing Forest and Reforest settings.

7.11 Imported Lot File Yields

When you import a Woodlot 3.2 lot file, the yield settings and yield results will be imported as well. The yields will be those you generated last in Woodlot 3.2.

The Yield Settings window will be grayed out, and at the bottom will display a checkbox “Imported from LOT file”. The polygon yield data and yields will be locked until you uncheck the box. This checkbox will be displayed for each yield type that you import.

At this point you can update the yield settings and prepare to recalculate your yields if you desire. You can either use your own information, or use the Woodlot 4 defaults. Woodlot will automatically apply the default values after you uncheck the box, which you can choose to use or override. Woodlot 4 defaults are based on general provincial default values. For example, TIPSYS OAFs will be set to 0.85 and 0.95; VDYP7 will use default Crown closure based on provincial species default values.

The screenshot shows the '19 (Existing Forest) - Yield Settings' window. The 'Yield Name' is '19 (Existing Forest)' and the 'Yield Type' is 'TIPSY'. The table below lists species and their yield settings:

Species Name	Comp (%)	Include	Utiliz. (cm)
FD - Douglas-fir	90	☒	12.5
HW - western hemlock	10	☒	12.5
		☒	
		☒	
		☒	


Below the table, the 'Regen Method' is set to 'Planted'. The 'OAF1' is 85 and 'OAF2 (or "DWB")' is 95. The 'Initial Density (#/ha)' is 1200. There are checkboxes for 'Pre Commercial Thin', 'Commercial Thin', 'Fertilize', and 'Genetic Worth', all of which are currently unchecked. At the bottom, the 'Current Forest: Age = 63 Site Index = 35.0 BEC = []' is displayed. The checkbox 'Imported from .LOT file.' is checked and circled in red. The 'Save Changes' and 'Cancel' buttons are at the bottom right.



7.12 Calculating Yields

You can calculate your yields by clicking the Calculate Yields toolbar item, once you have set up your existing forest and reforest parameters. You can calculate yields from any tab in Woodlot. The toolbar item will display the number of polygons that require yields to be calculated (which should be the number of polygons represented with a “?” question symbol in the navigation tree.)

Clicking Calculate Yields will bring up a black VDYP Console operation screen and then a TIPSYP operation screen similar to earlier versions of Woodlot. A progress bar will display at the bottom of the Polygon View tab window. Once calculated, the black screens will close and yields will be complete. The mini-yield curves will be displayed at the bottom of the screen.

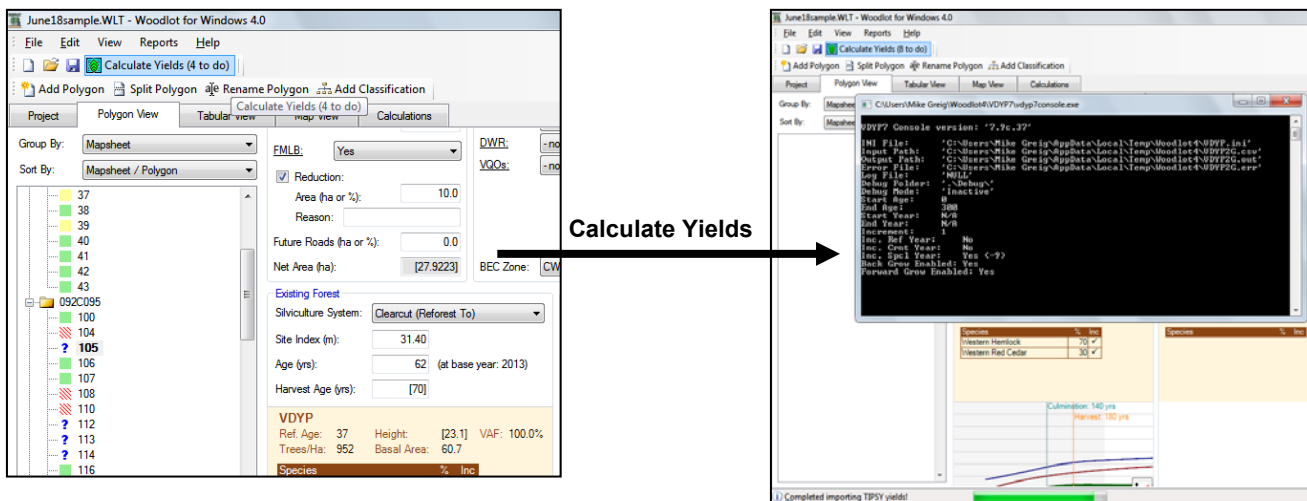

Where you have similar or identical vegetation cover types with duplicate yield types, Woodlot will only calculate the yield once and apply results of that yield data to similar polygons.

If after Calculating Yields there are still some polygons with no timber yield estimates, navigate back to the polygons to view the data. The “Calculate Yields” button will display the number of polygons with no estimates, for example (4 to do), and these polygons should still show the “?” in the navigation tree. Failure to calculate yields is generally caused by missing data items. Fill in the missing data and click Calculate Yields again, this should now complete your yields.

If you have an error, it will be displayed both on the mini yield curve in red text and in the yield table. Click on the mini yield curve to bring up the yield table for a report of errors.

7.12.1 Recalculating Yields

Yields do not need to be updated once calculated if no stand parameters or management parameters change. If parameters do change, you will wish to recalculate your yields. The number of polygons that require updating will be displayed on the Calculate Yields menu item.

Click the Calculate Yields menu item to calculate those updated polygon yields. Only those polygons with new data will have timber yields recalculated.



7.12.2 Recalculating Imported Lot File Yields

If you import an old lot file, the yields generated by the earlier version of Woodlot will be imported with the lot file

You can continue to use these in Woodlot 4, or you may wish to refresh them based on the newer yield models in Woodlot and any vegetation cover updates you may have. To do this for a single polygon, uncheck the “Imported from LOT file” checkbox and update the Yield settings. This will clear out the imported yield estimates; will indicate “no volume” in red on the Polygon View window next to harvest age, and will assign the harvest age of “not” for this polygon. The icon next to your polygon number in the navigation tree will show as a “?”.

You can batch uncheck imported lot file yields from the Edit menu, to save time from manually un-checking each one. Select on “Remove all “Imported .LOT Yields”. This will clear all your polygons and will apply the default Woodlot 4 yield settings. You can choose to manually edit the yield settings for each polygon or proceed to calculate yields.

The number of polygons that require updating will be displayed on the Calculate Yields menu item.

Click the Calculate Yields menu item to calculate those updated polygon yields. Only those with new data will be recalculated.

7.12.2 Recalculating TIPSYS Yields with New Utilization Parameters

It is possible to change TIPSYS utilization from 12.5 cm to 17.5 cm and then recalculate all TIPSYS yields. This is discussed in Section 6.7.



7.13 Stands vs Resultants

The stand includes the existing forest and the reforest to information. In the Polygon View tab, the items (shown in red below) are part of the stand details, the rest of the items are resultant details.

A stand contains one or more resultants.

Each resultant, stores classifier values and is linked to a portion of a stand. The graphics and comments are linked to the resultant.

The polygon list in Woodlot 4.4 displays a list of all the resultants. When you click on a resultant, the screen displays both the resultant's details and the stand details that the resultant is part of. Since multiple resultants can be linked to a single stand, updating the stand details will affect all the resultants that link to that stand.

During the harvest simulation, the harvest priority is defined by stands, not by resultants. Constraints are applied by classifiers which are applied to resultants rather than the whole stand. When Woodlot harvests a stand, it will harvest each resultant separately. If harvesting a resultant would exceed a constraint, that resultant will be scheduled for harvest, independent of the rest of the stand.

The screenshot displays the Woodlot 4.4 interface for a specific stand and its resultants. The top section shows stand details for '092C095 100 (2 pieces)'. Below this, the 'Classifiers' section includes dropdowns for Ownership, Crown, yao, owl, harvest, BEC Zone, and BEC. A 'Map' tab shows a grid with a red-shaded polygon. The 'Comments' section is empty. The 'VRI' section shows Feature ID, Site Index, Area, and a table of species and volumes. The 'Existing Forest' section shows silviculture system, site index, age, and harvest age. The 'VDYP' section shows reference age, height, VAF, and crown closure. The 'Reforest - No Change' section shows a regen delay. The 'No Change' section shows a graph of volume over time.

Stand Details:

- Area: Gross Area (ha): [6.7862], Net Area (ha): [6.7862]
- Future Roads (ha or %): 0.0
- Reduction: ☐
- Classifiers: Ownership: Crown, yao: yes, owl: yes, harvest: - none -
- BEC Zone: CWH, BEC: CWH_vh_1

VRI Section:

Feature ID: 2374198, Mapsheet - Polygon: 092C095 - 100, BEC: CWH_vh_1, FMLB: Yes, Inv.: FIP

Species	%	Live m ²	Dead m ²	Tot. m ²
western hemlock	90	683.1	0.0	683.1
western redcedar	10	51.3	0.0	51.3
Total	100	734.4	0.0	734.4

Dead Percent (%): 0%

BC Land Cover:

1. Vegetated
2. Treed
3. Upland
4. Treed - Coniferous
5. Open

Ref. / Projected:

	1/1/1987	1/1/2012
Age (yrs)	31	56
Height (m)		38.5
Live Trees/Ha (#/ha)		802
Dead Trees/Ha (#/ha)		0
Basal Area (m ² /ha)		60.7
Crown Closure (%)		60

Volumes are net merch. (m³/ha) at utilization: ☒ 12.5 (cm) ☐ 17.5 (cm)

Existing Forest:

Silviculture System: Clearcut (No Change)

Site Index (m): 37.6, Calculate SI

Age (yrs): 63 (at base year: 2019)

Harvest Age (yrs): [67]

VDYP:

Ref. Age: 31, Height: [24.3], VAF: 100.0%

Crown Closure: 60

Species	%	Inc.
Western Hemlock	90	✓
Western Red Cedar	10	✓

Reforest - No Change:

Regen Delay (yrs): [0]

No Change:

Graph showing Volume (m³/ha) vs Age (yrs). Key points: Ref Age: 31 yrs (275.8m³), Harvest: 67 yrs (894.4m³), Culmination: 67 yrs (894.4m³), cMAI: 1.25 m³/ha/yr.

An unlink feature can be accessed by right clicking on a polygon. The unlink feature creates a duplicate stand and then links the current resultant to the new stand instead.



8. Tabular View Tab

The Tabular View tab can be used to view, edit and report summary forest polygon information. Features of this tab are similar to the Summary screen in Woodlot 3.2, with streamlined and new features added to Woodlot version 4.1.

Polygon	Icon	Net Area (ha)	Current Age (yrs)	Site Index (m)	Yield Method	Harvest Age (yrs)	Volume at Harvest (m³/ha)	MAI at Harvest (m³/ha/yr)	Silviculture System
093E088 5679662	■	[1.0998]	n/a	0.0	NC	[0]	0.0		CC-NoChange
093E088 9408748	?	[1.1722]	129	17.4	NC	[0]	44.8		CC-Reforest
093E088 6848733	?	[1.2371]	215	16.1	NC	[0]	4.0		CC-Reforest
093E088 2643	■	[1.2462]	129	19.1	VDYP	[77]	260.4	3.38	CC-NoChange
093E088 2620	■	[1.2662]	129	19.1	VDYP	[79]	264.6	3.35	CC-NoChange
093E088 3298859	■	[1.2676]	n/a	0.0	NC	[0]	0.0		CC-NoChange
093E088 2665	■	[1.2784]	119	15.1	VDYP	[148]	183.1	1.24	CC-NoChange
093E088 2634	■	[1.3355]	79	18.3	VDYP	[not]	96.9	0.10	CC-NoChange
093E088 15279130	■	[1.3659]	159	18.5	NC	[0]	194.7		CC-Reforest
093E088 2623	■	[1.367]	119	10.8	VDYP	[not]	32.6	0.03	CC-NoChange
093E088 2671	■	[1.4011]	109	16.6	VDYP	[110]	306.5	2.79	CC-NoChange
093E088 2662	?	[1.4216]	129	17.4	NC	[0]	42.8		CC-Reforest
093E088 7719537	?	[1.4377]	89	16.6	NC	[0]	77.5		CC-Reforest
093E088 2654	?	[1.5823]	94	17.8	NC	[0]	79.9		CC-Reforest
093E088 7969729	?	[1.5922]	8	19.0	NC	[0]	0.0		CC-NoChange
093E088 2624	?	[1.687]	104	17.6	NC	[0]	76.1		CC-Reforest
093E088 2683	?	[1.691]	119	17.1	NC	[0]	49.5		CC-Reforest
093E088 2702	?	[1.749]	139	17.6	NC	[0]	71.0		CC-Reforest
093E088 11689915	?	[1.7923]	8	19.0	NC	[0]	0.0		CC-NoChange
093E088 2667	?	[1.8115]	39	16.0	NC	[0]	6.6		CC-Reforest
093E088 2622	■	[1.8829]	119	15.1	VDYP	[76]	157.1	2.07	CC-NoChange
093E088 2635	■	[1.9533]	79	16.7	VDYP	[not]	101.2	0.10	CC-NoChange
093E088 2690	?	[10.032]	119	18.0	NC	[0]	74.7		CC-Reforest
093E088 11969009	?	[11.1202]	97	17.1	NC	[0]	25.4		CC-Reforest

Data Display

The workspace displays your woodlot data summary based on the Column Filter (field names) and the Row Filter (polygons) you have selected. For example, if you want the summary to display all typical woodlot report attributes for all of your polygons, the Column Filter will be set to {Woodlot Summary} and the Row Filter will be set to {All Rows}.

The tabular view listing displays the following information for your woodlot:


- The polygon number is listed in the left column, with a small pointer on the row you have selected in Tabular View.



- Grey columns of data are Read-only cells. These numbers have been calculated in the Polygon View tab. They can be edited by editing the calculation in that window.
- White columns of data are editable cells. To edit, simply highlight the cell you wish to change and enter the new data. The icon will change to a "?" if your edit results in the yields needing to be recalculated (see below). Note that if you change yield types to check that you update all the fields and species information for those polygons.
- The highlighted row(s) are polygon(s) you have selected in the Polygon View or Map View.
- Icon colours are the same as used as in the Polygon View tab. Refer to Section 7.3.
- Square brackets [] represent values derived from defaults in Woodlot.
- Column headers represent fields of data in the Woodlot wlt file.
- Columns can be sorted from low to high by clicking on the column header.

Editing Data in Tabular View

When you edit the white cells of data in Tabular View, the polygon Icon(s) will change to a "?" if the edit will change the yields, and to prompt you that the yields need to be re-calculated for that polygon(s). For example, if you change the site index for the polygon, this will likely result in a different set of yields being calculated from VDYP or TIPSYS.

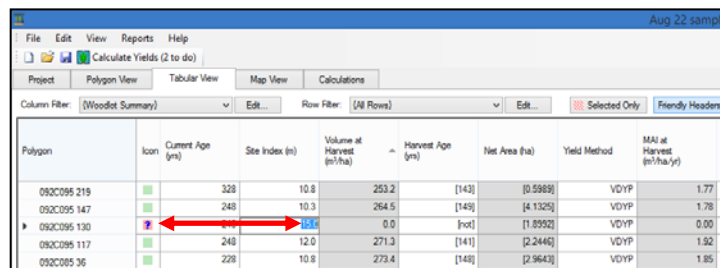


Polygon	Icon	Current Age (yrs)	Site Index (m)	Volume at Harvest (m³/ha)	Harvest Age (yrs)	Net Area (ha)	Yield Method	MAI at Harvest (m³/ha.yr)
092C095 219	[Green Square]	328	10.8	253.2	[143]	[0.5889]	VDYP	1.77
092C095 147	[Green Square]	248	10.3	264.5	[149]	[4.1325]	VDYP	1.78
092C095 130	[Green Square]	248	10.3	0.0	[not]	[1.8952]	VDYP	0.00
092C095 117	[Green Square]	248	12.0	271.3	[141]	[2.2446]	VDYP	1.52
092C095 36	[Green Square]	228	10.8	273.4	[148]	[2.9643]	VDYP	1.85

Your edits will be saved in memory until you close Woodlot, when you will be asked if you wish to save your changes. If you choose no, the edits you made will not be saved.

Reorder Columns

Columns can be re-ordered by clicking and dragging the column header either right or left to a new location. This state will remain when you close Woodlot and save your changes.

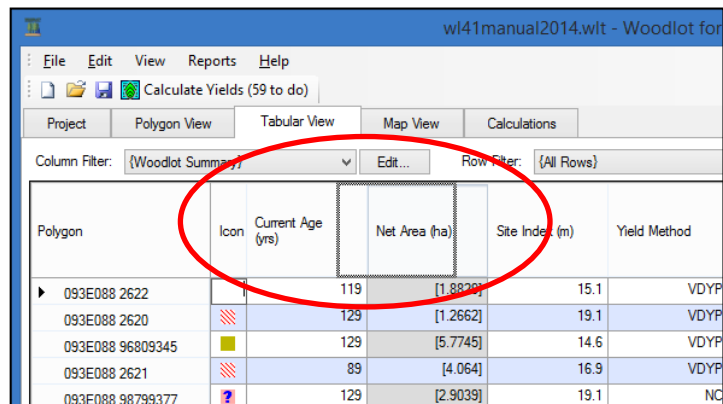

Polygon	Icon	Current Age (yrs)	Net Area (ha)	Site Index (m)	Yield Method
093E088 2622	[Green Square]	119	[1.8829]	15.1	VDYP
093E088 2620	[Red Hatched Square]	129	[1.2662]	19.1	VDYP
093E088 96809345	[Yellow Square]	129	[5.7745]	14.6	VDYP
093E088 2621	[Red Hatched Square]	89	[4.064]	16.9	VDYP
093E088 98799377	[Green Square]	129	[2.9039]	19.1	NC




Copying Data

Data in the Tabular View screen can be copied. Open the table view you are interested in from the Column Filter. From the Edit menu, click on Copy Table to place data from that table view into memory, ready for you to paste into another application such as Excel or Word.

The last arrangement of table views will be saved when you save your file.

Menu Buttons


Menu buttons are provided along the right side of the header for the following features:

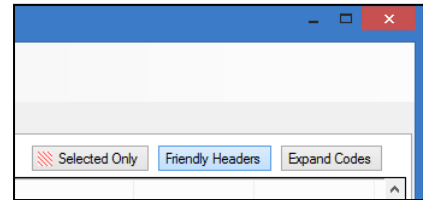

- **Selected Only** – click this button to display only those polygons you have selected in the Polygon View tab and Map View tab. Useful if you only wish to view certain polygons.
- **Friendly Headers** – click this button to switch column header names from variable names to user friendly names. Useful if you are checking variables and data in a file.
- **Expand Codes** – click this button to expand the columns of data on some of the tables.

Right Click Menu

Select on any cell in the Tabular view and right click to bring up the menu. Time saving features are available for:

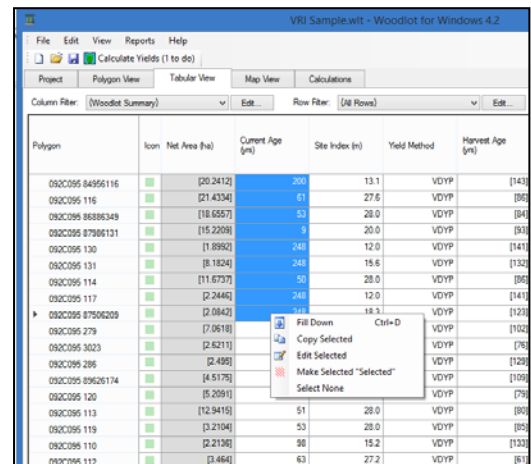


- **Fill Down** – can be used in the white data cells. Select the top cell, change or leave as is, highlight a group of cells below, right click and select Fill Down. This will copy the data from the to the highlighted cells.
- **Copy Selected** – highlight data in Tabular View you want to copy, right click and select Copy Selected to put data in the clipboard, ready for you to paste in another application such as Excel.
- **Edit Selected** – used to edit data in multiple white cells of your choice.
- **Make Selected** – highlight multiple cells and click Make Selected to select them in the Polygon View or Map View. The icons will display as red hatch.
- **Select None** – will de-select cells showing as highlighted with the red hatch icon.



8.1 Column Filter


The Column Filter includes two default summary tables and allows you to create your own custom table from your data set. Click on the list box to display tables you have available, and to create your own custom tables.

- The two default tables include a {Woodlot Summary} and {VRI}, distinguished by the { } brackets. Each has basic information on your woodlot.
- Your custom tables will be displayed in plain text. In the example adjacent, the project has an “Ownership Only” summary table.
- **-New Filter-** Select this when you wish to create a new table view.

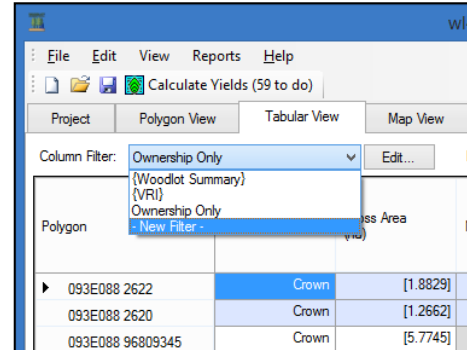

Create a New Column Filter

To create a new table view, navigate to the Column Filter drop down list box and click on New Filter. This will bring up the “Column Filters” dialogue, which you use to create your table view:

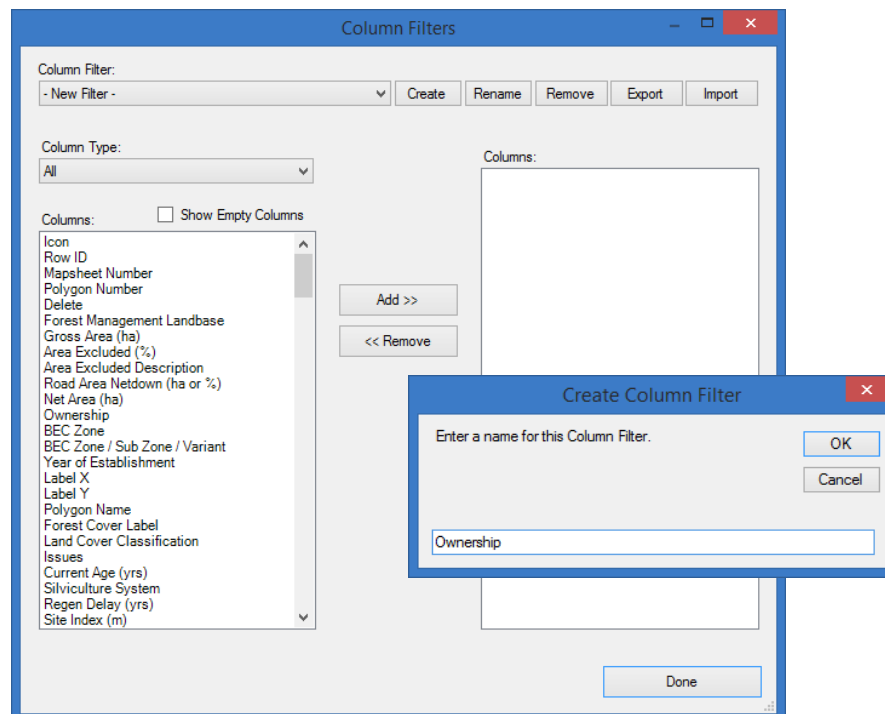

Under Column Filter, select on the New Filter list box and click “Create” to enter a name for the new filter and start configuring the filter. Refer also to the Column filter search feature, below.



Add columns of data by one of the following means:

- Selecting from Column Type drop down list box. If you don't know which type of data to select from, leave it on All.
- Selecting from the Columns list box of data you wish to display.

Click on Add to add the column of data, or Remove to remove the column of data. Selected columns of data will be greyed out once added.

The columns will be listed in right side Columns list box.

- Columns can be re-ordered once in the Tabular View by clicking and dragging the column header to a new location.
- Click "Done" when you are ready to view your new table format in the Tabular View tab.

The Column Filter menu buttons include:


- Create – for creating a new column filter.
- Rename – rename the Column filter name selected.
- Remove – to delete the Column filter selected.
- Export – you can also export the wcf (woodlot column filter) format for use by another person. The file will be exported for saving as a .wcf file.
- Import – you can import a .wcf format from another user with the import feature.

Your new Column filter will be saved with your woodlot project file when you save the project.

Column Filter Search Feature – New in Woodlot 4.3

In the Tabular View, Woodlot 4.3 included a new filter in the Column Filter. The Column Filter now has a new "Contains" filter in the selection window.

The columns list will filter to display only column names that contain the exact text in the "Contains" text box.

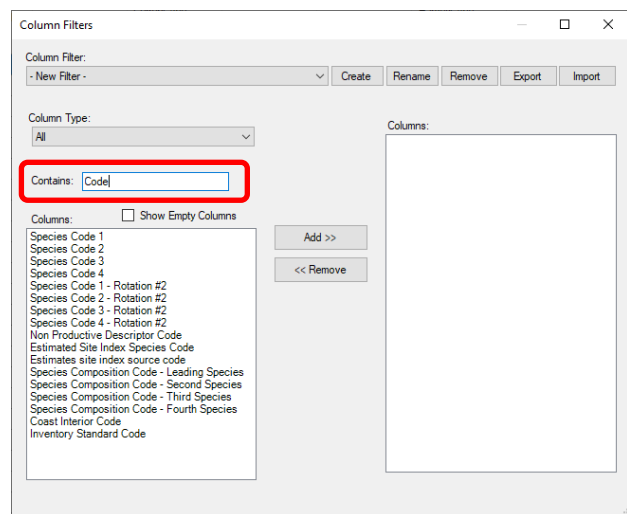


Edit a Table View

To edit a table view, in the Tabular View screen, select the view from the Column Filter list box and click the “Edit” button.

This will bring up the Column Filters dialogue box, where you can make your changes.


Items listed on the left in black text are available for adding to your table. Items shown in grey have been added already and are displayed in the right list of columns. The right list of columns will display in the Tabular View.

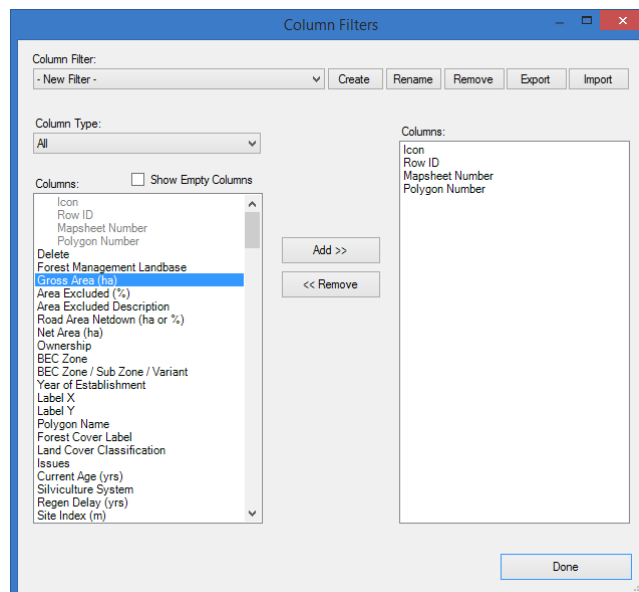

Empty Columns

A checkbox was added to the Column Filter screen in Tabular View to “Show Empty Columns.” Empty columns typically are fields of data in your data file that have a column header but the data cells below them are empty.

With the checkbox on, empty columns of data will be displayed as red in the column list. By default, the checkbox is off and empty red columns are not displayed in the Column Filters window to simplify the view.

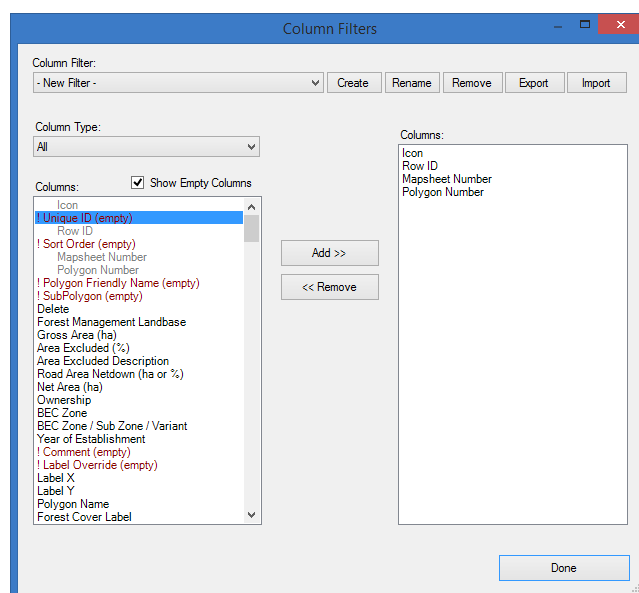

8.2 Row Filter


You can filter out polygons that have specific data you are interested in with the Row Filter feature. The filter has no effect on the polygons participating in the final AAC calculation.

Click on the Row Filter drop-down list box and select the attributes you wish to display polygons for. Woodlot provides a preliminary list of some filters you may wish to choose.

Otherwise, click “Edit” to create a new Row Filter and follow the instructions below.




Note: Creating a Row Filter is an advanced feature, which may require you to consult with your GIS mapping consultant to set up your attributes.

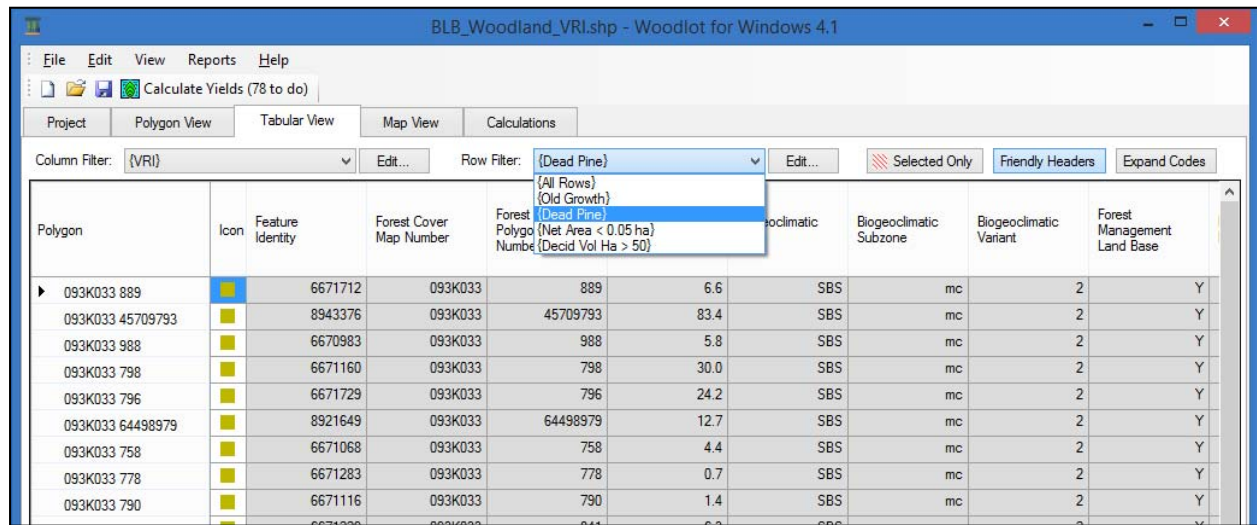


Creating a New Row Filter

To create your own custom Row Filter, click “Edit” next to the list of Row Filters.

This will display a “Row Filters” dialogue box. Click “Create” to create your new Row Filter and enter the new filter name.

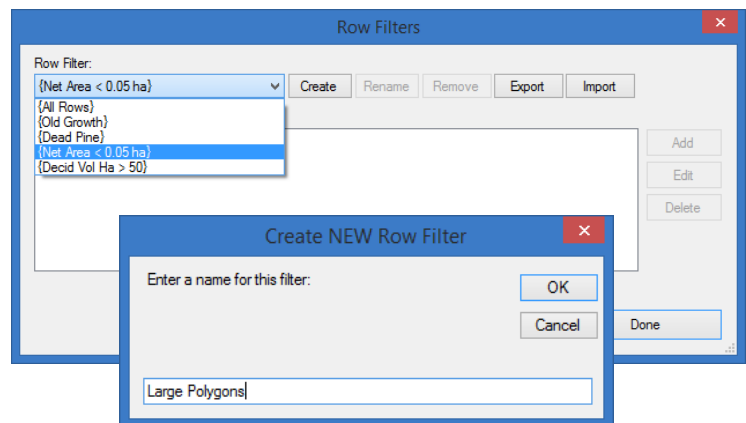


Your new filter name will appear in the list box, and the Row Filter dialogue will appear ready for you to select the attributes to add.

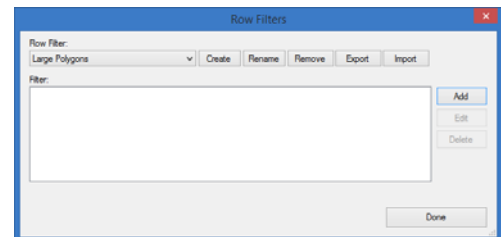


Click “Add” on the right side of the Row Filters dialogue box to display the attributes you can add to your filter.

Click on the attribute you are interested in to select it.

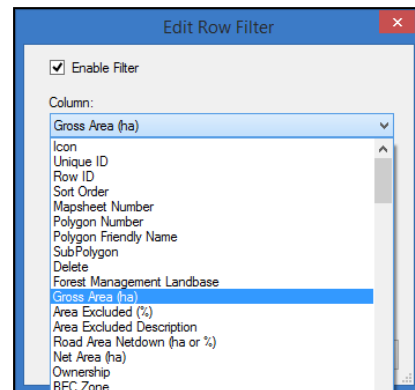


This will bring up an Edit Row Filter dialogue box, which you can enter the parameters for the attributes for the polygons you wish to filter out. Click “Save Filter”. This will take you back to the Row Filters dialogue box and will display the filter(s) you have created.

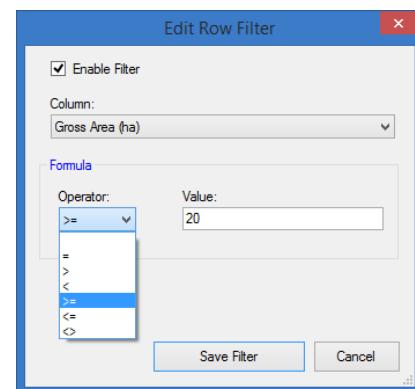

Add more filters in the same way as above by clicking “Add” and following the same sequence as above. Click “Done” when you are finished.


You can export and save your Row filter for use by another person in their file, or import a Row Filter using the **Export** and **Import** buttons.

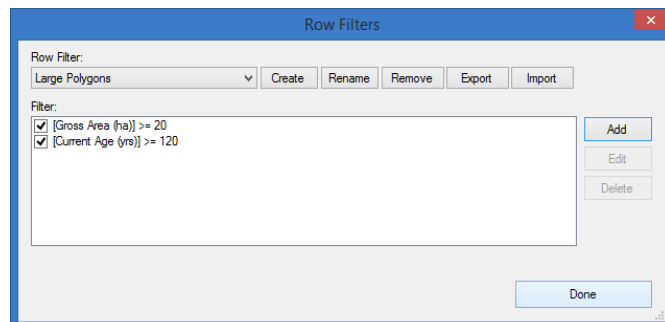

Rename or remove filter attributes by selecting the filter, and using the **Rename** and **Remove** buttons.


When you are done, you will see your Row Filter listed in the drop-down list box. Select this to filter the polygons in your woodlot for the attributes in your Row Filter.

Your Row Filter will save with your woodlot project file when you save the file.

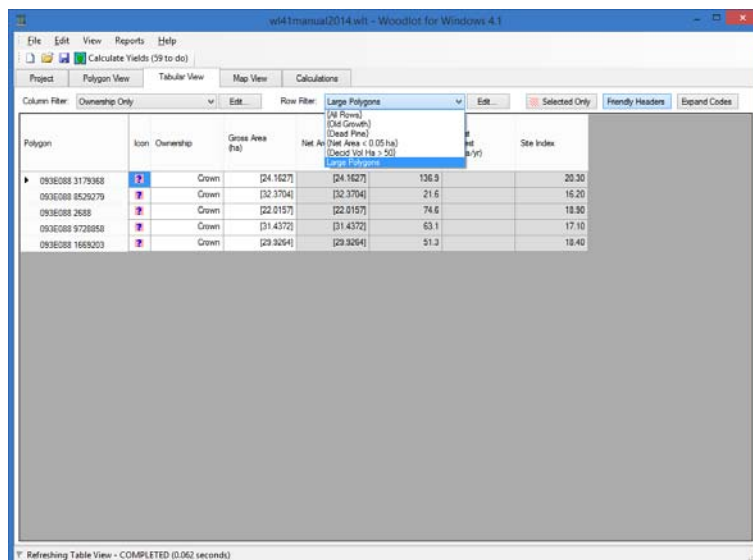

9. Map View Tab

The Map View tab is used for viewing a map of your woodlot. This is a new feature in Woodlot 4 and will assist you in recognizing polygons and their spatial configuration. If you are not familiar with digital maps or GIS, you may want to seek assistance from a mapping consultant or inventory forester when preparing files for use in Map View.

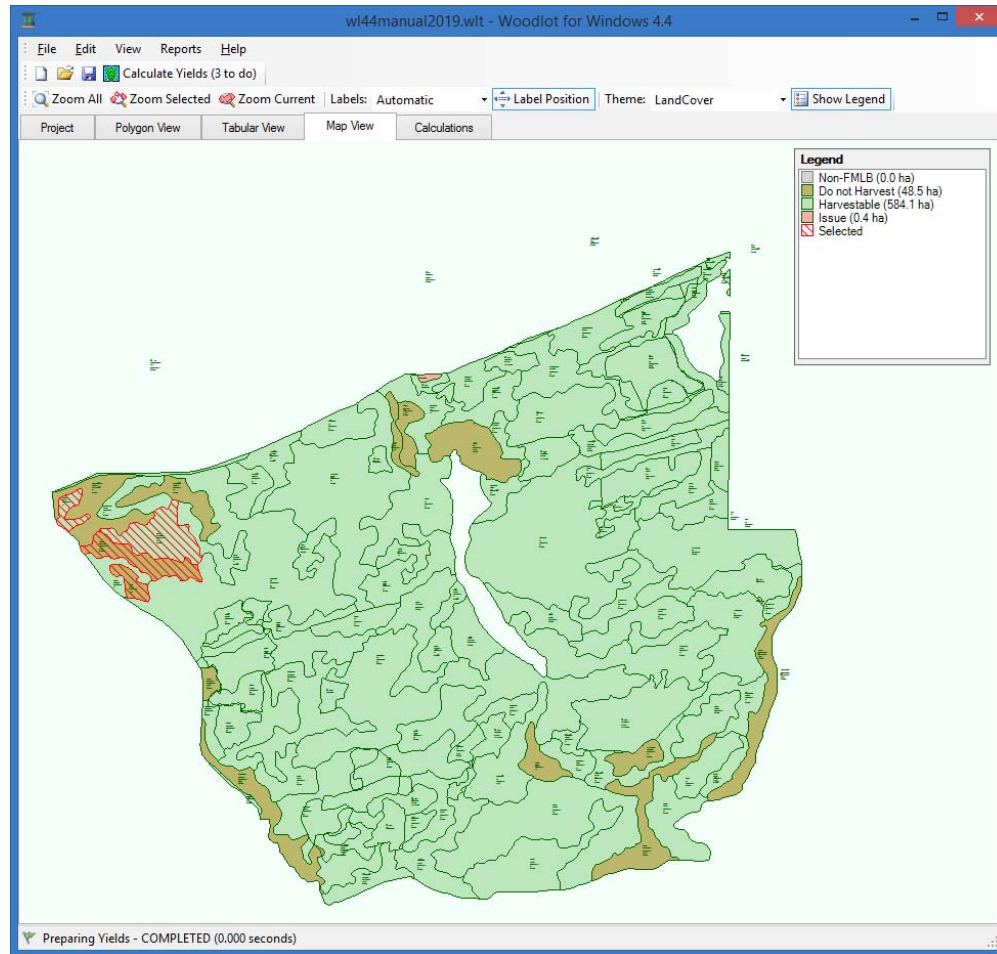

The Map View displays the map of your woodlot if you have imported a VRI shp file to Woodlot 4. Refer to Section 3.2 for more on map file formats that may be imported.

If you are working with a Woodlot 3.2 lot file, no map will be displayed unless you have imported a corresponding shp file and linked it with the polygon data.

To select a polygon in the map view screen, hover your mouse and right-click the polygon. The polygon will display as a red hatch and can be zoomed to.



Map View includes the following basic features:

- Themed map of your woodlot with forest polygons and forest cover labels, with a legend.
- To adjust label displays, use the Labels selection box in the menu. Refer to the Map Toolbar description below for options.
- The map is colour coded using colours in the Polygon View navigation tree. Green represents forested polygons, yellow for NSR polygons, grey for excluded polygons (such as lakes and rock), red hatched for selected polygons.

To select and highlight polygons, right click on the map polygon (hatch on). To un-select a highlighted polygon, right click again (hatch off). Hatched polygons will display in the Polygon View and Tabular View as hatched icons.


Note that polygons split or added within Woodlot cannot be properly selected with the Map view interface.

If any of the polygons are missing of which you know that should be visible, uncheck **Hide non-FLMB** in the **View** menu to verify if the polygon was invisible because it is non-FLMB.

9.1 Navigating the Map

To navigate around the map:

- Click “Zoom All” to return the map to the starting position. Use this if you lose the map.
- To zoom in, left click, hold and draw a box on your area of interest.
- Use the scroll wheel to zoom in and out. Be careful where you position the mouse as this will affect how the map will zoom in and out.
- The information bar at the bottom of the screen lists the polygon number that your mouse cursor hovers over.

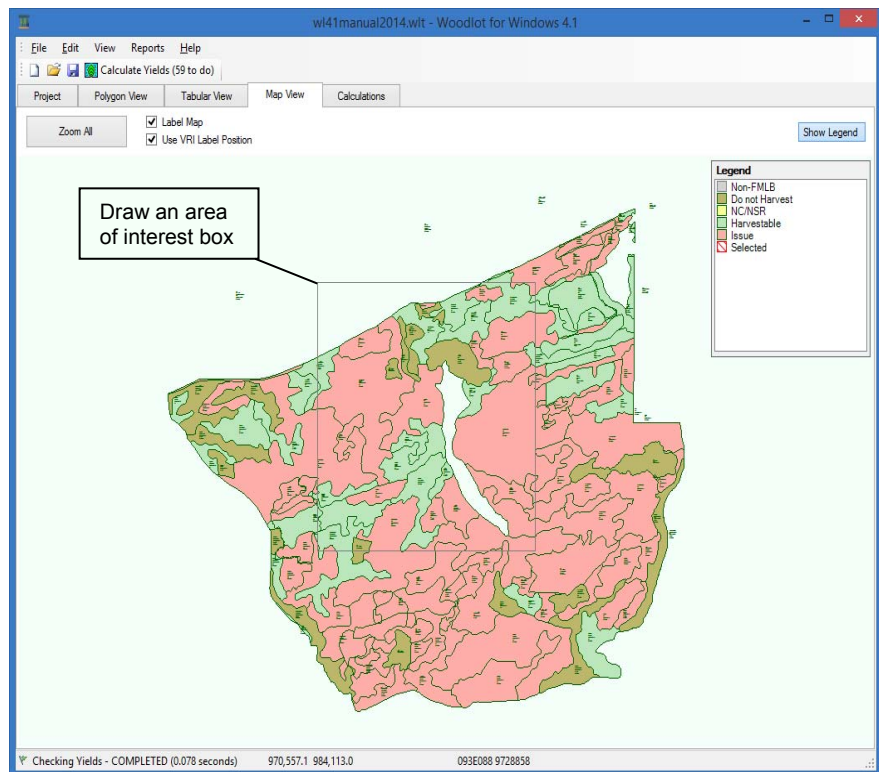


9.2 Map Toolbar

In Woodlot 4.4, the Woodlot map buttons are now located on the toolbar in the Map View (above the map), with features added or enhanced.



Map toolbar features and enhancements include:


1. Zoom Selected – clicking this button scales the map so the selected polygons (shown in hatching) fill the map window.
2. Zoom Current – clicking this button scales the map so the current (last selected) polygon fills the map window.
3. Labels – map label options include:
 - a. Automatic – Same as Woodlot 4.3. See below.
 - b. Existing Forest – A label generated from the Existing Forest settings.
 - c. Future Forest – A label generated from the Future Forest settings.
 - d. VRI – The multi-line label imported from VRI.
 - e. Override – A custom label than can be specified on the Rename polygon screen.

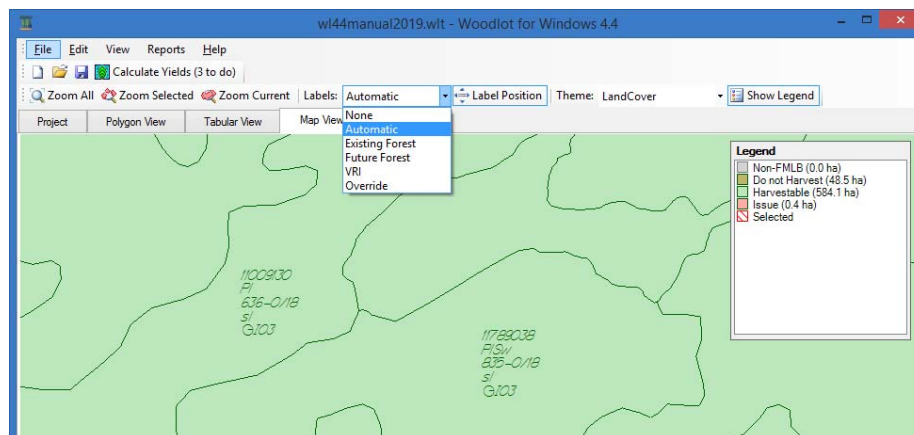

9.3 Automatic Label Order

The Automatic label order is as follows:

1. Uses the “Map Label Override” from Rename Polygon (if it is not blank). To create the map label override, in the Polygon tab click the polygon number to activate the Rename Polygon dialogue box. In the Map Label Override box type in your new label. This will display on the small map and on the main map.

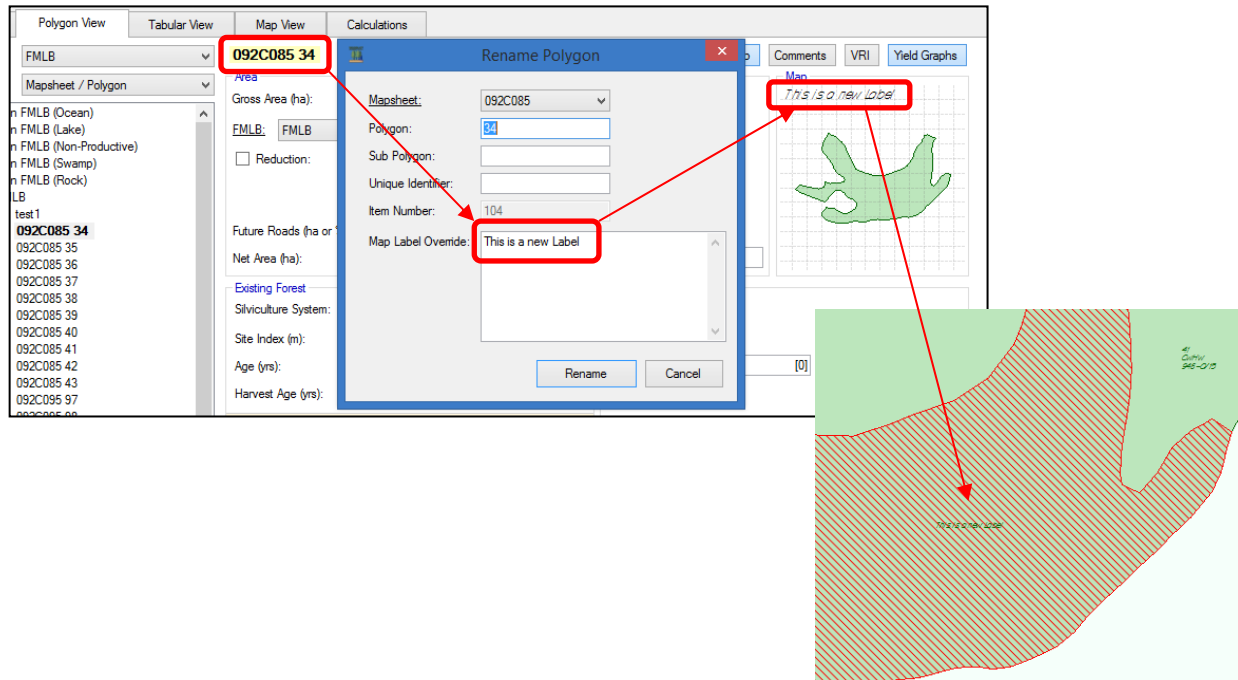


2. Otherwise, uses the VRI “Full Label” if there is VRI data for this polygon. The Full Label column can be viewed in the Tabular View.
3. Otherwise, uses the label based on the Existing Forest “FC Label” from the Woodlot Report b) Polygon Data table.



10. Calculations Tab

The Calculations tab is used to undertake harvest rate calculations for your woodlot, and to create harvest planning reports and graphs. Features of the Calculations tab are similar to the Calculations screen in Woodlot 3.2, with streamlined and new features added. The calculations and reports are used to support an AAC determination by the District Manager.

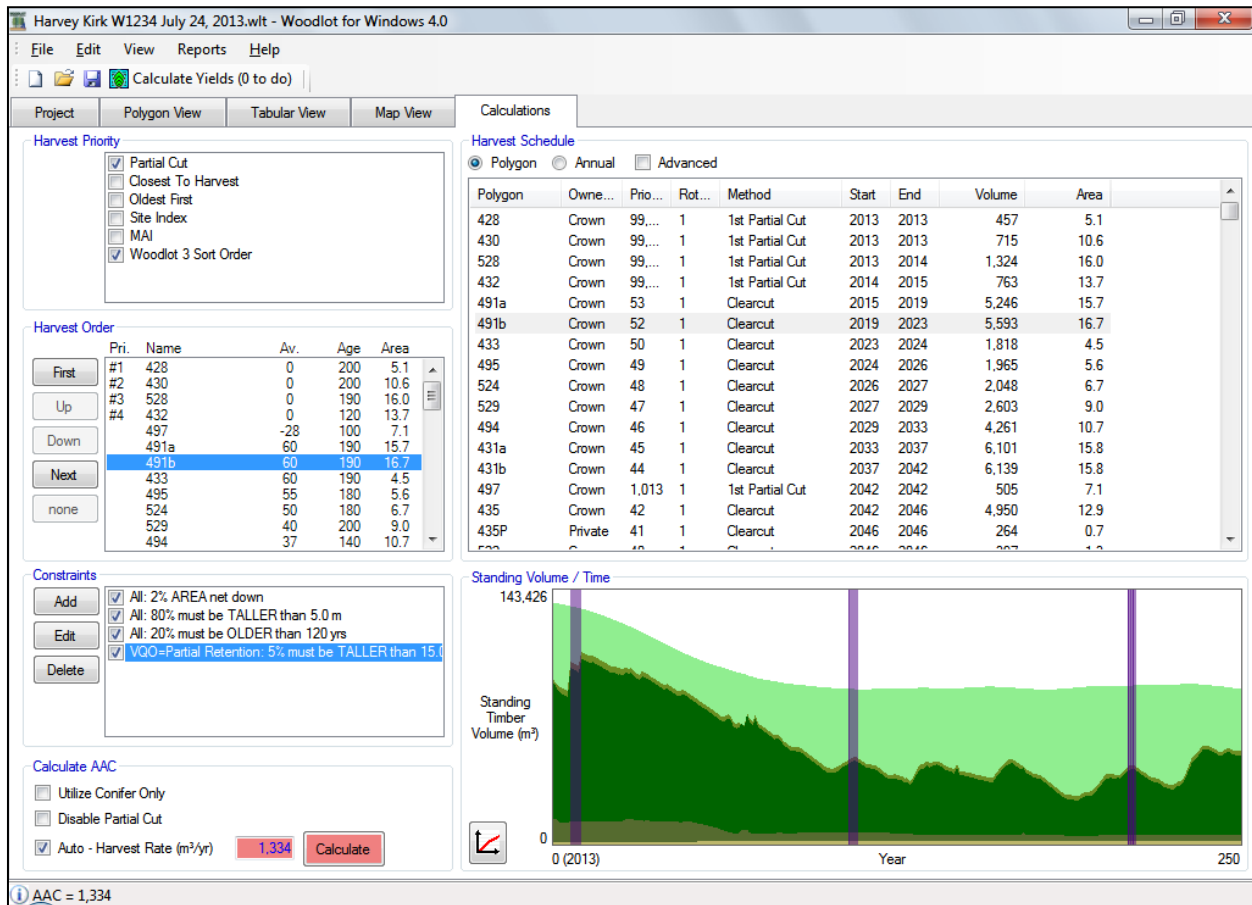

In Woodlot 4, like Woodlot 3.2, a non-declining even flow (flat line) sustainable harvest rate is calculated over a 250-year planning horizon, which is FLNROD policy for woodlot licences in BC.

An iterative harvest rate calculation is performed on polygons identified in the Harvest Order. Calculations use the forest polygon yield and management information shown in the Polygon View tab. Forest cover constraints can be applied to simulate the impact on timber supply of non-timber values that do not preclude harvesting.

The sustainable annual harvest rate (m^3/year) is shown next to the Calculate button and in the information bar at the bottom. The resulting harvest schedule is displayed in the table at the top right and can be viewed in several helpful ways by selecting on one of the radio buttons. The resulting volume over time graph is displayed at the bottom right. Reports and graphs can be generated from the Reports menu item.



The Calculations tab is split into the following functional sections, described below:

- Harvest Priority
- Harvest Order
- Constraints
- Calculate AAC
- Harvest Schedule
- Standing Volume/Time graph

Click the Calculate button to calculate the sustainable harvest rate once you have identified the harvest priority and harvest order. The Calculate button will show red if any data or assumptions have changed since the last time a harvest rate was calculated. A new harvest schedule and Standing Volume/Time graph will display for your review. You can also produce a Woodlot Harvest Planning Report and graphs.

10.1 Harvest Priority

The harvest priority section is used to identify the order in which polygons will be scheduled for harvest first. The priority can be based on up to six (6) prioritizing options starting with the highest priority at the top. You add these by selecting on the checkboxes.

The screenshot shows the 'Harvest Priority' section on the left, which is highlighted with a red box. It contains a list of checkboxes for prioritizing options: ☒ Partial Cut, ☐ Closest To Harvest, ☐ Oldest First, ☐ Site Index, ☐ MAI, and ☒ Woodlot 3 Sort Order. Below this is the 'Harvest Order' section, which displays a table of polygons with columns for Priority, Name, Average Age, and Area. The 'Harvest Schedule' section on the right shows a table with columns for Polygon, Owner, Priority, Rotation, Method, Start, End, Volume, and Area. The 'Calculations' tab is active, and the 'Harvest Schedule' sub-tab is selected.

Pri.	Name	Av.	Age	Area
#1	428	0	200	5.1
#2	430	0	200	10.6
#3	528	0	190	16.0
#4	432	0	120	13.7
	497	-28	100	7.1
	491a	60	190	15.7
	491b	60	190	16.7
	433	60	190	4.5
	495	55	180	5.6
	524	50	180	6.7
	529	40	200	9.0
	494	37	140	10.7

Polygon	Own...	Pri...	Rot...	Method	Start	End	Volume	Area
428	Crown	99...	1	1st Partial Cut	2013	2013	457	5.1
430	Crown	99...	1	1st Partial Cut	2013	2013	715	10.6
528	Crown	99...	1	1st Partial Cut	2013	2014	1,324	16.0
432	Crown	99...	1	1st Partial Cut	2014	2015	763	13.7
491a	Crown	53	1	Clearcut	2015	2019	5,246	15.7
491b	Crown	52	1	Clearcut	2019	2023	5,593	16.7
433	Crown	50	1	Clearcut	2023	2024	1,818	4.5
495	Crown	49	1	Clearcut	2024	2026	1,965	5.6
524	Crown	48	1	Clearcut	2026	2027	2,048	6.7
529	Crown	47	1	Clearcut	2027	2029	2,603	9.0
494	Crown	46	1	Clearcut	2029	2033	4,261	10.7
431a	Crown	45	1	Clearcut	2033	2037	6,101	15.8
431b	Crown	44	1	Clearcut	2037	2042	6,139	15.8
497	Crown	1,013	1	1st Partial Cut	2042	2042	505	7.1
435	Crown	42	1	Clearcut	2042	2046	4,950	12.9
435P	Private	41	1	Clearcut	2046	2046	264	0.7

The order will be displayed in the Harvest Order section below, starting with the highest priority first. The harvest schedule is then run in this sequence. If a polygon has not met its harvest parameters by the time it is scheduled for harvest, it will be put in a queue and harvested once they are met.

The harvest priority for the first few polygons can be forced by manually scheduling their priority in the Harvest Order section (see below). Those polygons must first meet their harvest parameters as well before harvest.



The harvest priority options include:

- Partial Cut – partial cuts take priority in the harvest sequence since they usually have timing constraints once they reach a harvestable age. Woodlot will defer harvesting a polygon until the new minimum is reached. Users can over-ride the default by entering their own minimum re-entry volume.
- Closest to Harvest – schedules the harvest based on when polygons have met or will meet in the future all their harvest parameters. Polygons that have met their harvest parameters for a long time will have a high availability (which will be displayed as a high “Av” number in the Harvest Order); conversely, polygons that require a long time before meeting their harvest parameters will show with a low availability or negative availability “Av” number of years. “Av” refers to number of years that a polygon has met its harvest parameters for, and has been ready for harvest.
- Oldest First – the classic timber supply priority that schedules harvesting based on the oldest polygons first, assuming they first meet their harvest parameters.
- Site Index – schedules harvesting based on the highest site index polygons first, assuming they first meet their harvest parameters.
- MAI – schedules harvesting based on polygons that have the highest mean annual increment first, assuming they first meet their harvest parameters.
- Woodlot 3 Sort Order – for use with old Woodlot 3.2 lot files only. Woodlot 4 will carry over and display your original AAC calculation result, and will structure the order for harvest based on the sort order from the lot file. This will help you assess changes in calculation methodology between Woodlot 3.2 and Woodlot 4.
- The Woodlot 3 Sort Order option will only be displayed when a lot file is imported. New projects will not display this option.

Internally in Woodlot 4, a weighting is applied to each polygon based on the priority chosen. The higher up the displayed list, the higher the priority weighting. The weighting is displayed in the Harvest Schedule. Partial cut polygons are given a high priority for harvest because they are time sensitive.

As a reminder, Woodlot 4 will default the stand harvest age to the older of a) culmination age and b) the age at which all the harvest parameters are met. The default can be overridden by manually entering a custom harvest age in the Polygon View tab, overriding the default [] square bracketed harvest age.



10.2 Harvest Order

The harvest order section lists the order in which polygons will be harvested based on the harvest priorities set above, and any manual harvest order you apply in this section. Users have the flexibility to schedule in blocks that they wish to harvest first. If you manually sequence a polygon, it will move to the top of the priority for harvest.

To manually sequence polygons, select the polygon from the list and use the navigation buttons at left to move them up or down:


- First – sends the selected polygon to the top, first position for harvest.
- Up and Down – sends the selected polygon up or down a position(s).
- Next – adds the polygon you select to the next position for harvest.
- None – removes the manually sequenced priority from the selected polygon.

The column headers include

- “Pri” = priority.
- “Name” = polygon number.
- “Av.” = number of years the polygon has been available for harvest and met the harvest parameters.
- “Age” = current age of the polygon leading species.
- “Area” = polygon area in hectares (ha).

10.3 Constraints

Timber harvesting constraints that model the impact of stewardship and non-timber resource management on timber supply can be applied using the Constraints feature. This works similar to Constraints in Woodlot 3.2, although the feature now has expanded capability.

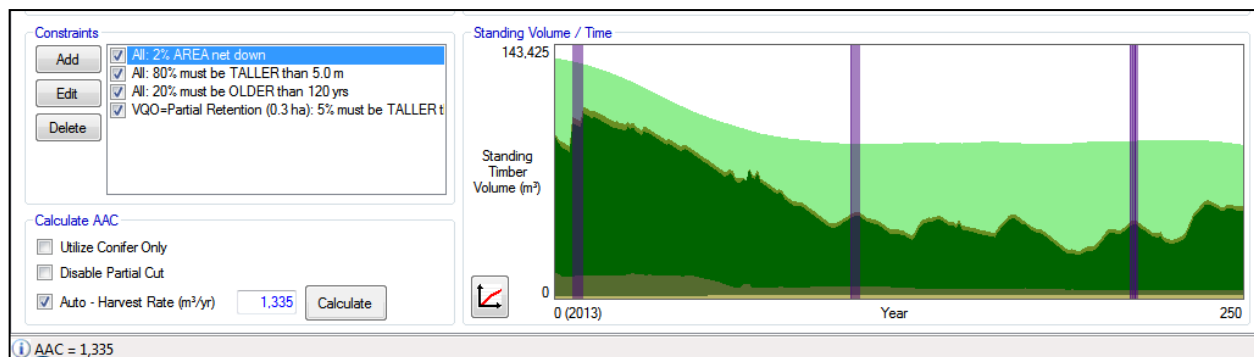

Constraints can be applied universally to your entire woodlot, and/or to specific classifications of polygons created/selected in the Polygon View tab. Constraints can be applied for % area netdowns, stand height constraints, stand age constraints or any combination of these.




Polygons will be harvested once the current inventory meets the prescribed constraint parameters, on a going forward basis. Several or all constraints can be met at the same time, constraints are not cumulative. Timber required to meet one constraint can also be used to meet other constraints.

To activate constraints in your harvest calculation, select the check boxes for the constraints you have set up, and you wish to activate. They will not activate if they are not checked.



10.3.1 Adding and Editing Constraints

To add a constraint, in the Constraints section click the Add button. This will bring up the Add Constraint window as follows:

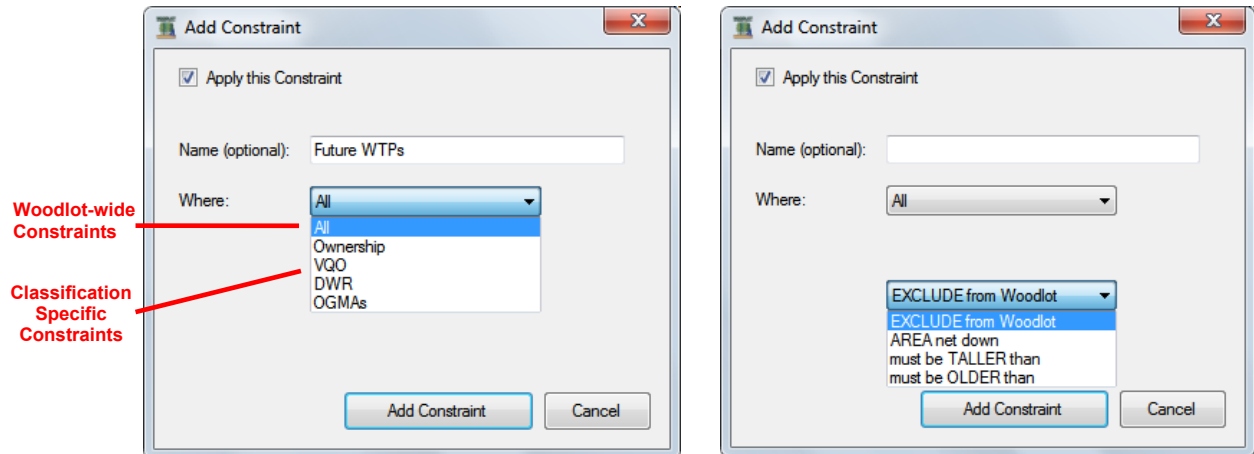


Constraints can be applied to the entire woodlot (global) or to an individual classification only (classification specific) as follows:

- Global constraints - to apply constraints globally across all polygons in your woodlot, from the “Where” list box, select **All**. Select the type of constraint from the list box.
- Classification specific constraints - to apply constraints to one of your classifications, from the “Where” list box, select the classification you wish to apply constraints to. In the example above, four classifications are identified (Ownership, VQO, DWR, OGMA) in addition to All (the whole woodlot).

To edit a constraint, select the constraint in the Constraints section checklist, click the Edit button to bring up the Edit Constraint dialogue window and make your changes.


To delete a constraint, select it in the Constraints section checklist, and click Delete.

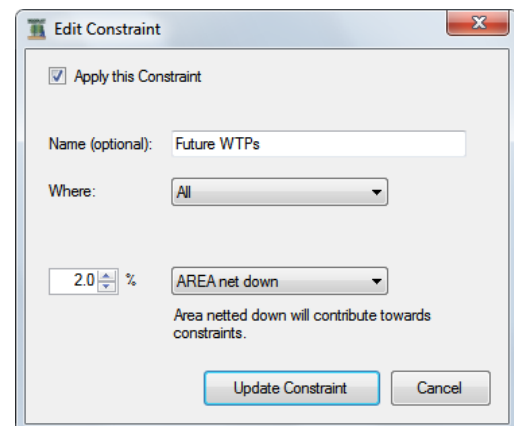

10.3.2 Types of Constraints

There are four general types of forest cover constraints that can be applied to the timber supply in Woodlot 4. These can be added, edited and deleted from the Constraints section of the Calculations tab.

After you have selected to Add a constraint, choose the one you wish to use and select the “Apply this Constraint” checkbox to apply it to the chosen polygons listed under the “Where” drop down list box. Un-check if you wish to turn them off. You can also turn constraints on or off in the Calculations tab by selecting the check-boxes there. Constraints will stay listed even if they are not applying.

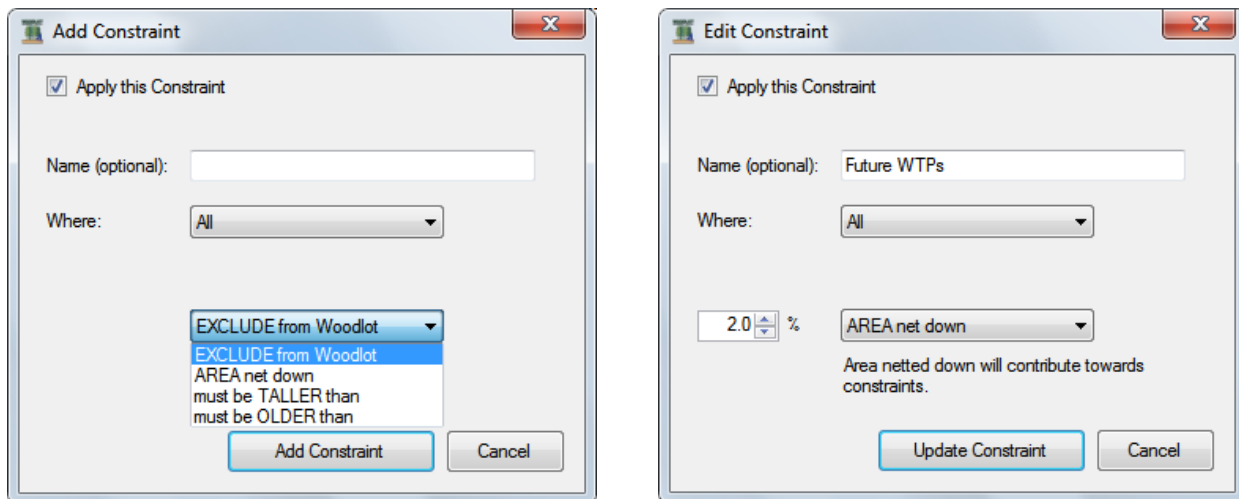

Choose one or all of the following cover constraints:

- EXCLUDE from Woodlot** – this constraint is available in the event you wish to completely remove a classification group of polygons from the timber harvest rate. Use this only on a classification, not globally. EXCLUDE polygons will not be harvested and will not contribute to the forest cover constraints, and will not display in the Standing Volume/Time graph.
 This constraint could be used to test the impact of excluding private land from the timber supply.
- AREA netdown** – this constraint is used to apply a broad % netdown across all polygons contributing to the timber harvest rate. It is in effect a scaler function, reducing the amount of available timber from those areas by that %. An area netdown will reduce the timber management area on the woodlot by the indicated amount. The standing and future volume from that area will not be available for harvest, but the forest will contribute towards forest cover constraints on the woodlot. It will display as a tan section in the Standing Volume/Time graph.
 For example, a 2% area netdown on a 100-ha woodlot will reduce the area by 2 ha of land and timber from the harvest, although the area and timber will contribute to meeting forest cover constraints, such as ungulate winter range or visual quality objectives.



- Must be TALLER than – a height constraint requiring that x % of the forest cover in the classification the constraint applies to must be TALLER than y m. This constraint is used typically to model visual quality objectives or hydrology management.

For example, a polygon or set of polygons that are managed with a VQO of Partial Retention might allow up to 15% of the area to be harvested and in a non-VEG state. The area may be considered VEG once it achieves 5m green-up. To model this constraint with a forest cover constraint in Woodlot for Windows, the constraint might read “**85% must be TALLER than 5m**”. Woodlot for Windows will then check that 85% of the area covered by this constraint has trees at least 5m tall before allowing harvesting. To test the implications of this constraint, uncheck the Calculate AAC Auto Harvest Rate (m3/yr.), enter in a higher AAC, recalculate the AAC and observe where the graph has red bars; these are periods when the constraint cannot be met at the higher AAC.

- Must be OLDER than – an age constraint requiring that w % of the forest cover in the classification the constraint applies to must be OLDER than z yrs. This constraint is used typically to model ungulate winter range or old growth management needs.

For example, if you have a requirement to manage for ungulate winter range on 40% of the woodlot area. To model this constraint with a forest cover constraint in Woodlot for Windows, the constraint might read “**40% must be OLDER than 120 years**”. Woodlot will then check the area of your woodlot and ensure that at least 40% of the area has stands that are older than 120 years of age before allowing harvesting. To test the implications of this constraint, uncheck the Calculate AAC Auto Harvest Rate (m3/yr.), enter in a higher AAC, recalculate the AAC and observe where the graph has red bars; these are periods when the constraint cannot be met at the higher AAC.


- The order for constraints in the calculations is to EXCLUDE, then AREA Netdown, then TALLER than, and finally OLDER than.

You can name the descriptor for classification specific constraints by completing the “Name (optional)” box. The descriptor name will display in the Constraints section of the Calculations tab for classification specific constraints, but not for global constraints.



10.4 Calculate AAC

To calculate the harvest rate, click the Calculate button at the bottom of the Calculation tab. This will generate the estimated sustainable, non-declining even flow harvest rate in cubic meters of timber per year over a 250-year planning horizon. The harvest rate will be displayed next to the Calculate button; it will also display at the bottom of the screen in the information bar.

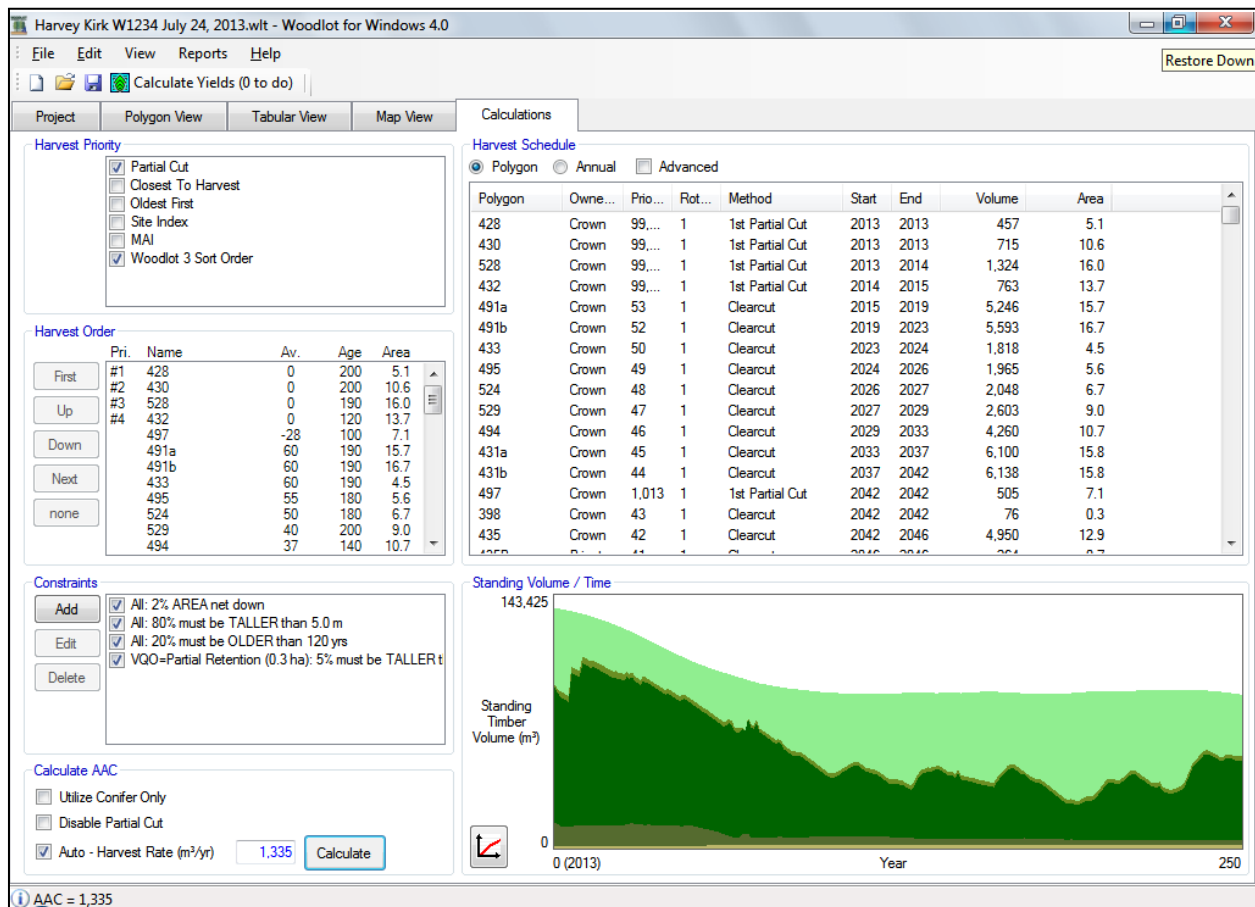

The Harvest Schedule will update, as will the Standing Volume/Time graph. In the graph:

- dark green and dark brown represents volume that is available for harvest at each year,
- light green and light brown represents volume scheduled for harvest and will become available once the parameters have been met, and
- mustard brown indicates volume not scheduled for harvest over the 250-year horizon.

For a more detailed description of the shaded areas refer to the Standing Volume/ Time Graph within section 10.6.

The calculation is based on meeting the harvest priorities, the harvest order (if any specified), the harvest parameters and harvest ages for existing and future forests, and the harvest constraints you set.



If the harvest rate is a sustainable non-declining even flow harvest rate over the 250-year planning horizon, having met the harvest parameters and constraints, the annual volume should display the same for each year in the Harvest Schedule at the right; no issues should appear.

The Calculate button will display red if the harvest rate needs to be calculated or recalculated, indicating that there has been a change in data or settings since the last calculation.

You can choose to calculate the harvest rate either automatically or manually, as follows.

10.4.1 Automatic Calculations

Three automatic setting options are available for running harvest calculations.

- Utilize Conifer Only – this will harvest all conifer and deciduous timber, but will utilize the conifer volume only and will not include the deciduous component in the AAC. This feature is commonly used to test the contribution of deciduous volume in the harvest rate, or to test excluding deciduous harvest because of limited or no current merchantability.
- Disable Partial Cut – this will convert partial cut polygons to clearcut. This feature is commonly used as a test of the implications of partial cutting on the AAC.
- Auto – Harvest Rate (m3/yr.) – this will harvest the woodlot in the manner you have prescribed above. If you have activated the Utilize Conifer Only or Disable Partial Cut, the Auto Harvest will simply harvest the woodlot based on meeting those options in addition to the normal harvest priorities, parameters and constraints you have set for the woodlot.

The resulting harvest schedule will be displayed at the top right. The Standing Volume/Time graph will display at the right, showing the available timber supply over the 250-year planning horizon.

10.4.2 Manual Calculations, Testing Harvest Rates (and Implications)

You may also want to undertake a manual harvest rate calculation. This feature is a very good way to test the sensitivity of your woodlot timber supply to harvest parameters, constraints or to simply check the implications of a higher or lower harvest rate on your timber supply.

To do this, un-check the automatic calculation checkboxes, enter your own harvest rate in the Calculate box and click Calculate. You will be presented with an updated Harvest Schedule and Standing Volume/Time graph, with comments or denotations depicting whether the harvest rate is higher or lower than the sustainable level.

Where the **harvest rate is higher than a non-declining even flow harvest rate** (i.e. above the auto-calculated rate), vertical red bars or blue bars will be displayed in the graph for the times when there is not enough eligible volume to harvest. An “Issue” will be denoted in the Harvest Schedule Annual View Issues column describing what has not been met.

Testing Higher Harvest Rates


The Standing Volume/Time graph depicts the sum total of timber volume on the woodlot at any point in time over the 250-year planning horizon. When a harvest calculation occurs, the



sustainable harvest rate will be reported. No vertical red or blue bars indicates that constraints will be met.

Un-check the “Auto-Harvest Rate (m³/yr.)” checkbox and enter a higher harvest level than the one calculated. For example, if the sustainable rate is 1,335 m³/yr., enter 2,000 m³/yr. and click the “Calculate” button.

If you see red or blue bars, the harvest rate is partially achievable; but not sustainable over the 250-year planning horizon. Red bars indicate that there is sufficient volume but it is constrained, and the harvest will result in not achieving those cover constraints. In the Harvest Schedule, under Issues, Woodlot will indicate “Constraints”. Blue bars indicate that there is simply not enough merchantable volume to make the desired harvest rate. Woodlot will harvest the portion of merchantable volume that is available or, if none is available, will defer the harvest until there is some volume available. In this case, Woodlot will indicate “Nothing to Harvest” as the issue. It is quite likely that there is volume on the woodlot at these times, however this has not met merchantability limits (as denoted by the lighter green colour).

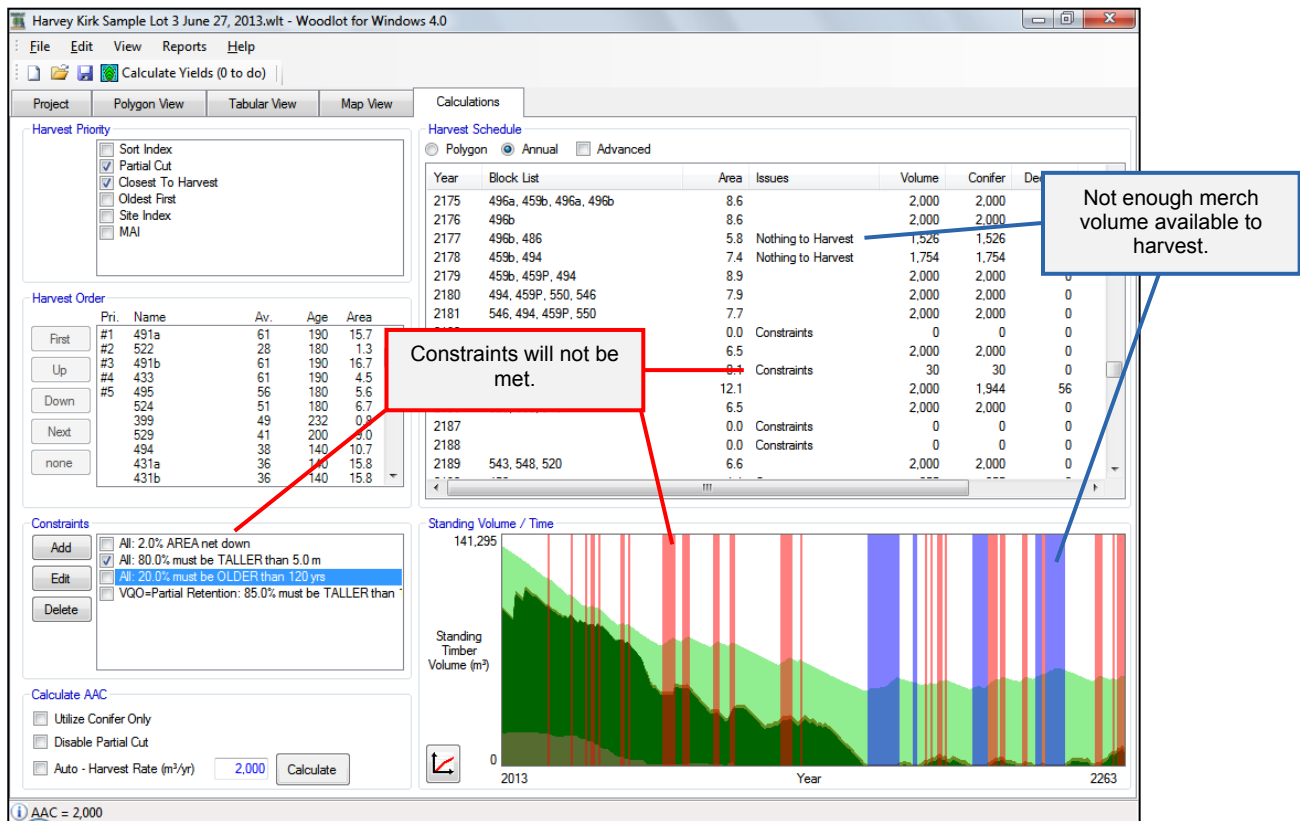

Blue bars indicate that there is simply not enough merchantable volume to make the desired harvest rate. Woodlot will harvest the portion of merchantable volume that is available or, if none is available, will defer the harvest until there is some volume available. In this case, Woodlot will indicate “Nothing to Harvest” as the issue. It is quite likely that there is volume on the woodlot at these times, however this has not met merchantability limits (as denoted by the lighter green colour).


In the example above, the sustainable harvest rate was 1,335 m³/yr. The forced manual harvest for testing purposes is 2,000 m³/yr. Issues are denoted by vertical red bars and vertical blue bars in the graph, and in the Issues column in the Harvest Schedule. The forced cut has enough timber of merchantable size available to harvest through some of the constraints, but it will violate constraints. Blue vertical bars appear when there is insufficient merchantable



volume of any kind available to harvest, with or without constraints. In these situations, Woodlot will harvest all available volume but the annual harvest volume will be lower than the target. In automatic mode, Woodlot would normally defer harvesting until there is sufficient volume to meet the constraints, resulting in a harvest of 1,335 m³/yr.

Testing Lower Harvest Rates

To test a lower harvest rate, uncheck the “Auto - Harvest Rate (m³/yr.) checkbox, enter your harvest rate in the Calculate cell and click “Calculate”. The resulting Harvest Schedule and graph will typically show a building inventory of merchantable timber. No constraints will be broken; you will simply be harvesting below the sustainable harvest rate. This may be useful to test the implications of not harvesting at the sustainable harvest rate.

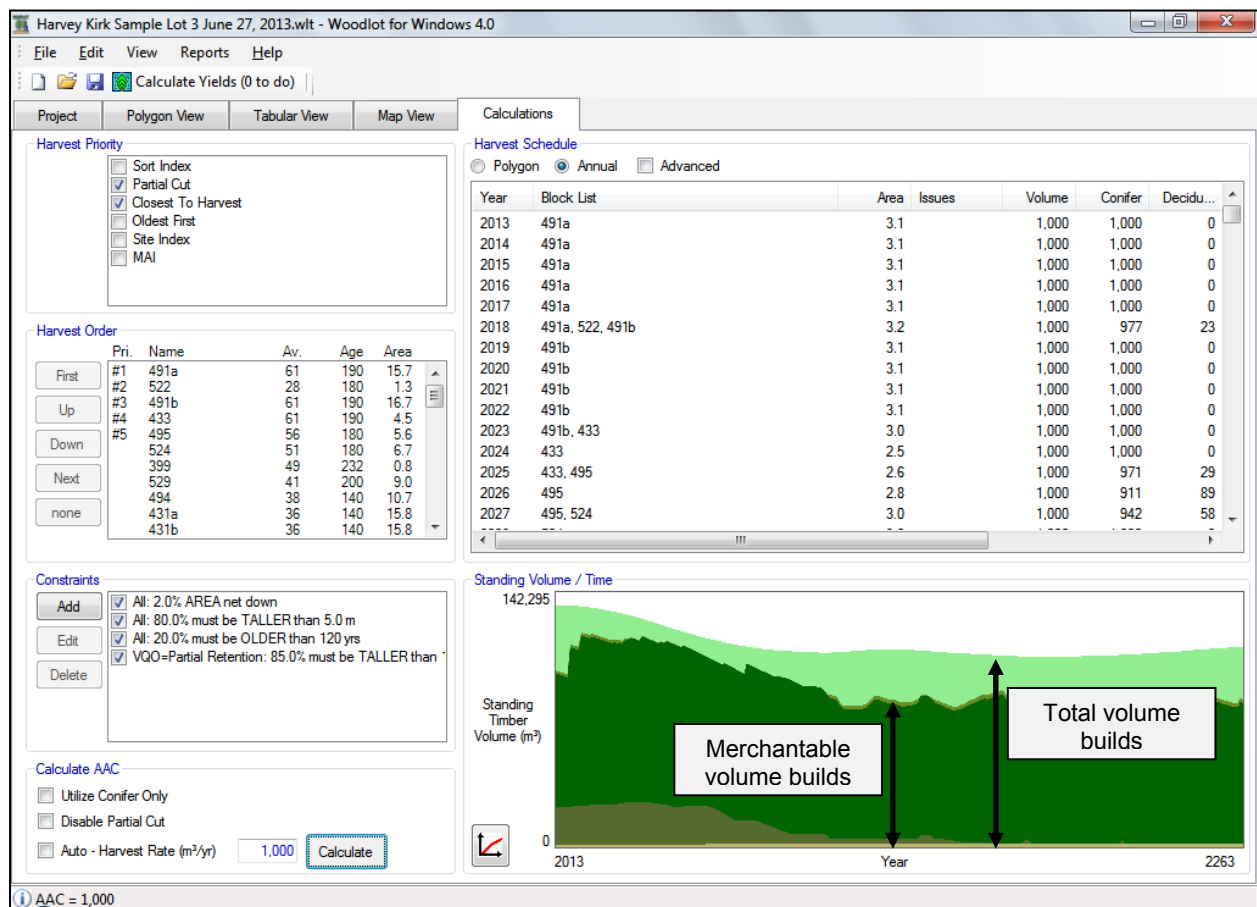

The example above demonstrates how a lower harvest will be displayed. A sustainable harvest rate was calculated at 1,335 m³/yr. A lower forced harvest of 1,000 m³/yr. is proposed. There are no issues denoted in the Harvest Schedule or vertical lines on the graph, indicating that there is more than enough merchantable timber available to meet that harvest level. The merchantable volume (dark green and dark brown) and total available volume (top of light green) builds over time.

See below for more information on the Harvest Schedule and the Standing Volume/Time graph.

10.4.3 LRSY and MAI


The Long Run Sustained Yield (LRSY) is the theoretical Long-Run Sustained Yield for a forest planning area, resulting in the maximum theoretical harvest level. In Woodlot,

1. $\text{LRSY (m}^3/\text{yr.)} = \text{Culmination Mean Annual Increment (m}^3/\text{ha/yr.) of the future stand} \times \text{Net Woodlot area (ha)}.$
2. $\text{Net Woodlot area (ha)} = \text{Net area (ha)} \times \text{THLB inclusion factor (if any)}.$

The Net Woodlot Area has also been netted down to remove area listed in the “EXCLUDE from Woodlot” area constraints.

Effective July 2018, the LRSY is displayed on the Calculate AAC panel, located in the lower left corner of the Calculations tab.

You can set the harvest rate to use the LRSY annual rate by simply **clicking** on the underlined LRSY text.

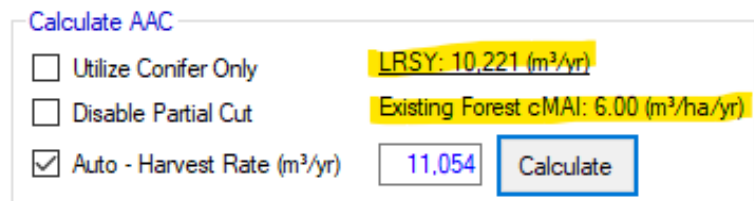

Calculate AAC

☐ Utilize Conifer Only LRSY: 10,221 (m³/yr)

☐ Disable Partial Cut Existing Forest cMAI: 6.00 (m³/ha/yr)

☒ Auto - Harvest Rate (m³/yr) 11,054 Calculate

The existing forest culmination Mean Annual Increment (cMAI) has been added to the Calculate AAC panel.


The Annual Increment (m³) has been added to the Advanced Annual harvest report, located on the Harvest Schedule panel in the Calculations Tab.



10.5 Harvest Schedule Panel

The harvest schedule panel will display the calculated results of your harvest calculation. The results displayed are useful for you to assess your AAC analysis.

If your harvest rate is sustainable, meeting all the harvest parameters and constraints, the annual volume should display the same for each year in the Harvest Schedule, and no issues should appear. This denotes a non-declining even flow harvest rate over the 250-year planning horizon. In the example above, the non-declining even flow harvest rate is 1,554 m³/yr. (Refer also to Manual Calculations above if you have vertical red or blue bars appearing in the graph, or Issues identified.)

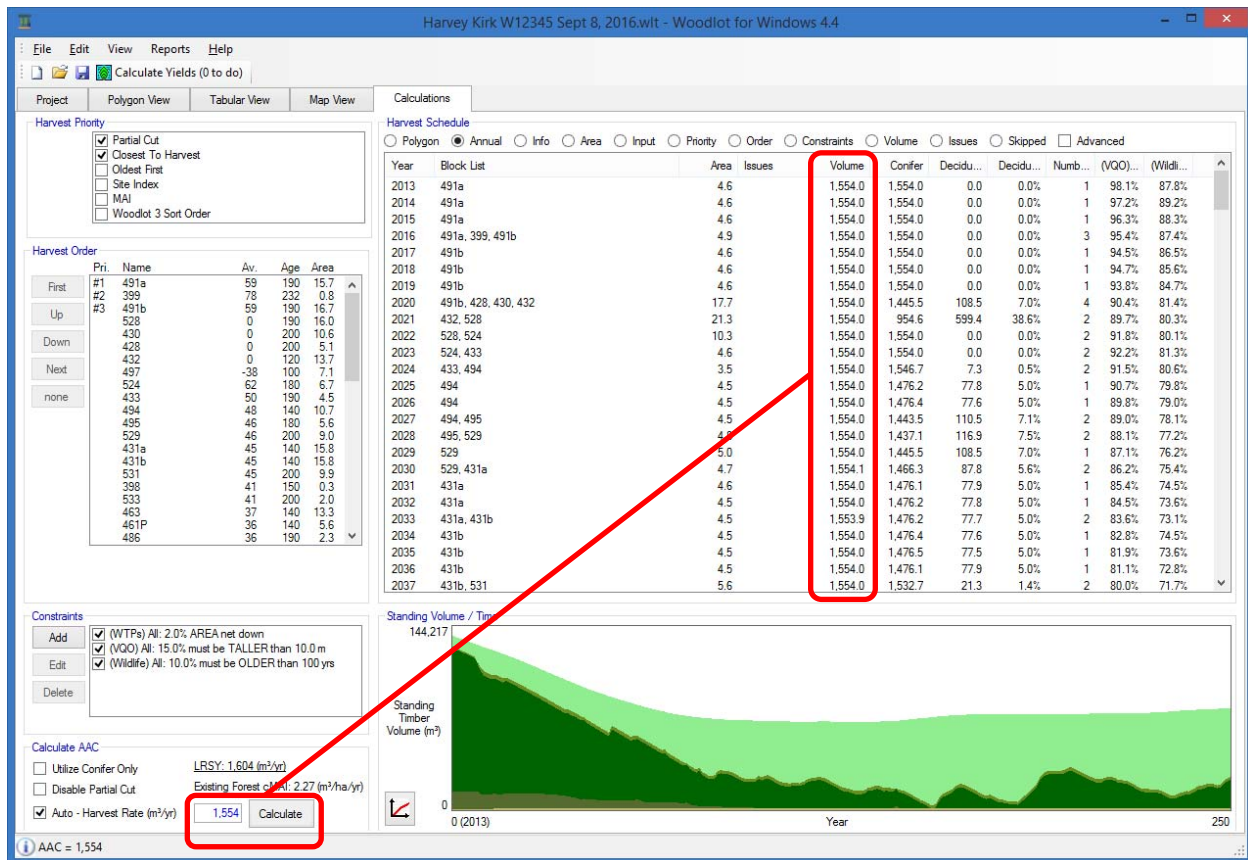


10.5.1 Harvest Schedule Reports

View several summary reports for your harvest schedule by selecting on one of the radio buttons in the Harvest Schedule panel. Results are provided in a basic mode and an advanced mode. The basic mode provides typical columns of information you will want to review for your calculations, and will be displayed unless the Advanced checkbox is selected.


Check on the Advanced box to display more columns of data for the Polygon report and the Annual report.

The reports can be copied out of Woodlot and pasted into another application, such as Excel. To do this, select on any report in the Harvest Schedule panel, then under the Edit menu item choose "Copy Harvest Schedule". This will copy the table you are viewing to memory ready for you to paste into your other application.

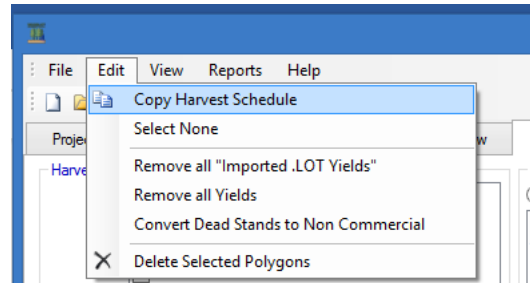

Note: the software cannot wrap column header names, you will need to slide the columns wider to display the names. Columns can be moved by clicking and dragging them to a new position.

Select from the following Harvest Schedule reports:

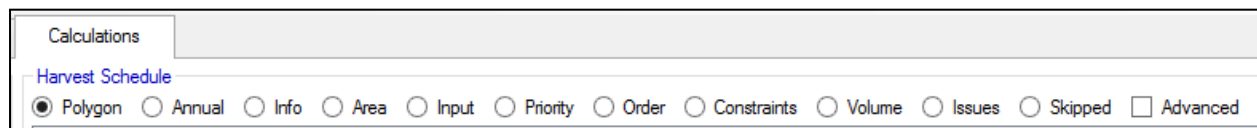

1. Polygon – displays your harvest calculation results on a polygon specific basis.

- Polygon name.
- Ownership.
- Priority for harvest – this is a calculated number in Woodlot used to establish harvest sequence.
- Rotation harvested.
- Method – clearcut versus partial cut, including the occurrence.
- Start – starting year for harvest.
- End – final year for harvest.
- Volume – total volume harvested (m³).
- Area – total area harvested (ha)

2. Annual – displays your harvest calculation results on an annual basis. For each year:

- Year – harvest year.
- Block list – list of polygons harvested in that year.
- Area harvested (ha).
- Issues – either:



- o blank, meaning there was sufficient merchantable timber available to harvest and no issues;
 - o “Nothing to Harvest”, meaning there is no merchantable timber available to harvest; or,
 - o “Constraints”, meaning that at least one of your harvest constraints are not met.
 - Volume – total volume harvested (m³).
 - Conifer – coniferous volume harvested (m³).
 - Deciduous – deciduous volume harvested (m³).
 - Deciduous % - % of deciduous in the harvest.
 - Number of Polygons – number of polygons harvested in that year.
 - Classifier Constraints – a column for each classifier constraint will display the % of the forest that meets the constraint, for example:
 - o Height Constraint – if there is a height constraint, this will display the % of the forest that meets the constraint.
 - o Age Constraint – if there is an age constraint, this will display the % of the forest that meets the constraint.
3. Info – new in Woodlot 4.4, provides summary information on the Woodlot.
 4. Area – new in Woodlot 4.4, provides a woodlot area summary.
 5. Input – new in Woodlot 4.4, provides input data used.
 6. Priority – new in Woodlot 4.4, provides the harvest priority you set in the Calculations screen.
 7. Order – new in Woodlot 4.4, provides lists the polygons you force an order on.
 8. Constraints – new in Woodlot 4.4, provides describes constraints used in your run.
 9. Volume – new in Woodlot 4.4, provides a volume summary.
 10. Issues – new in Woodlot 4.4, provides a summary of harvest issues by year and reason.
 11. Skipped – new in Woodlot 4.4, provides a listing of polygons not harvested and the reason why.
 12. Advanced columns provide extended data for each of the following reports when the Advanced box is checked on:
 - Polygon report
 - Annual report

Harvest Schedule


☐ Polygon
 ☐ Annual
 ☐ Info
 ☒ Area
 ☐ Input
 ☐ Priority
 ☐ Order
 ☐ Constraints
 ☐ Volume
 ☐ Issues
 ☐ Skipped
 ☐ Advanced

Description	Area (ha)	Area (ha)	Volume (m ³)	Count
Total Area	2107.0		0.0	410
- Non Forest	0.0		0.0	0
- Non FMLB (VRI)		0.0	0.0	0
- Non FMLB (Lake)		0.0	0.0	0
- Non FMLB (Ocean)		0.0	0.0	0
= FMLB (forest management landbase)	2107.0		898,355.2	410
- Reduction		22.6	6,363.1	61
- Future Roads		0.0	0.0	0
= Net Area	2084.4		891,992.0	410
- Excluded (Constraints)	0.0		0.0	0
= Contributing Forest	2084.4		891,992.0	410
- Missing yield data		0.0	0.0	0
- Area Net down (constraint)		0.0	0.0	0
- Minimum Parameters Not met		242.5	7,188.1	47
- Silviculture System - Do Not Harvest		0.0	0.0	0
= THLB (timber harvesting landbase)	1841.8		884,803.9	363



10.6 Standing Volume/Time Graph

After a calculation is run, the colour Standing Volume/Time graph will be displayed. This is a graph showing the total volume of timber on the woodlot at any point in time over the 250-year planning horizon. For best results, the graph should be read in conjunction with the Harvest Schedule.

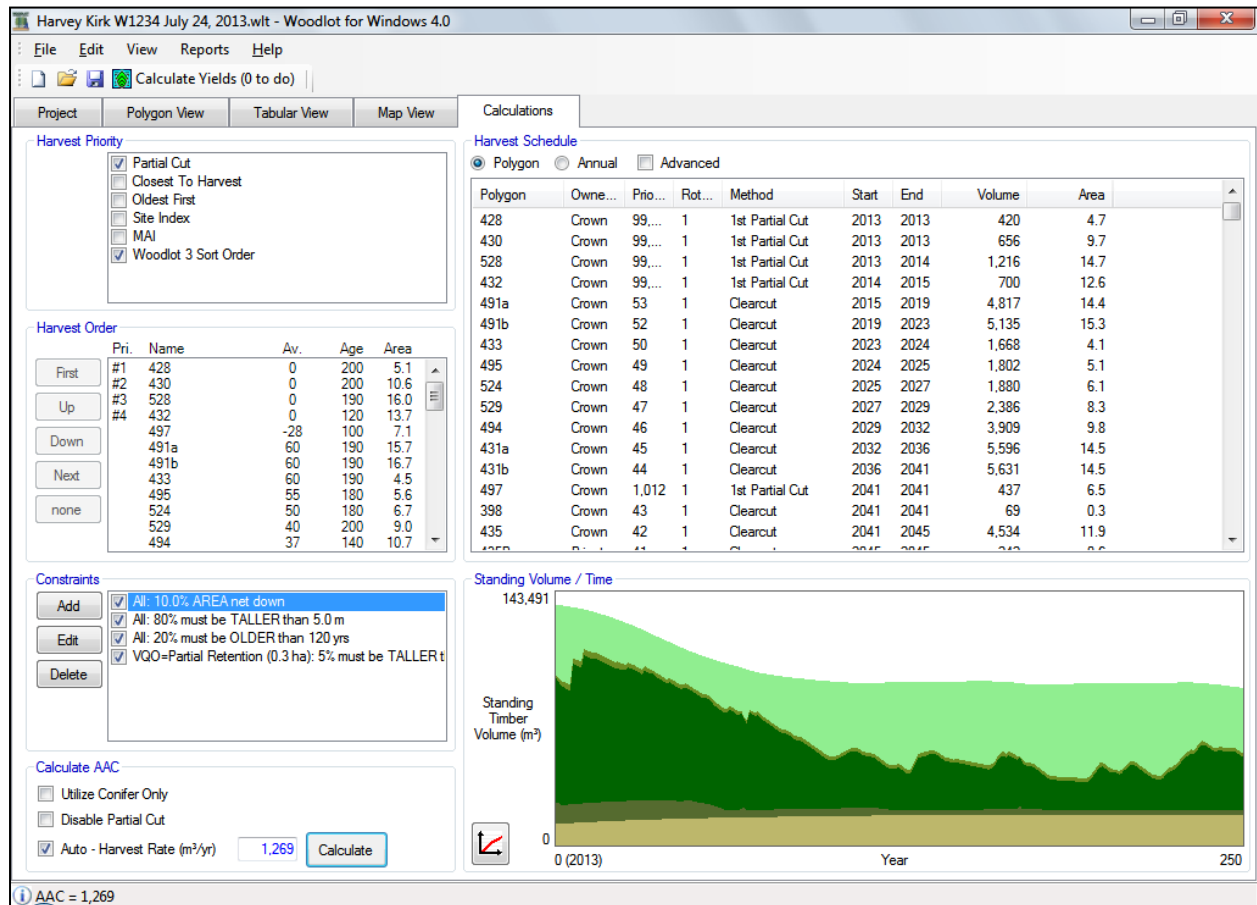

The vertical axis displays total net merchantable timber volume in (m³) after allowances for decay waste and breakage. The horizontal axis shows time over a 250-year planning horizon, from the current year (year 0) to 250 years in the future.


The graph is a stacked graph, showing the following volumes at any point in time. They add cumulatively from the bottom to the top for each of the following segments:

- Mustard Brown – timber of all ages that will not be harvested within the 250-year planning period. This results from either the area netdowns or polygons classified as not harvestable. It will contribute to meeting the forest cover constraints, but will never be harvested. This is shown as the lowest layer on the graph.




- Dark Brown – mature deciduous timber that meets the harvest parameters set for the woodlot (age, diameter, vol/ha) and the minimum harvest age of each polygon. This timber is available for harvest and is considered mature deciduous.
- Dark green – conifer timber that meets the harvest parameters set for the woodlot (age, diameter, vol/ha) and the minimum harvest age of each polygon. This timber is available for harvest and is considered mature conifer.
- Light brown – deciduous timber that has not yet met harvest parameters or not of harvestable age, and will at some point become available for harvest. Considered immature deciduous.
- Light green – conifer timber that has not yet met harvest parameters or not of harvestable age, and will at some point become available for harvest. Considered immature conifer.

The total volume standing on the woodlot, mature and immature, at any point in time is shown along the top edge of the light green.

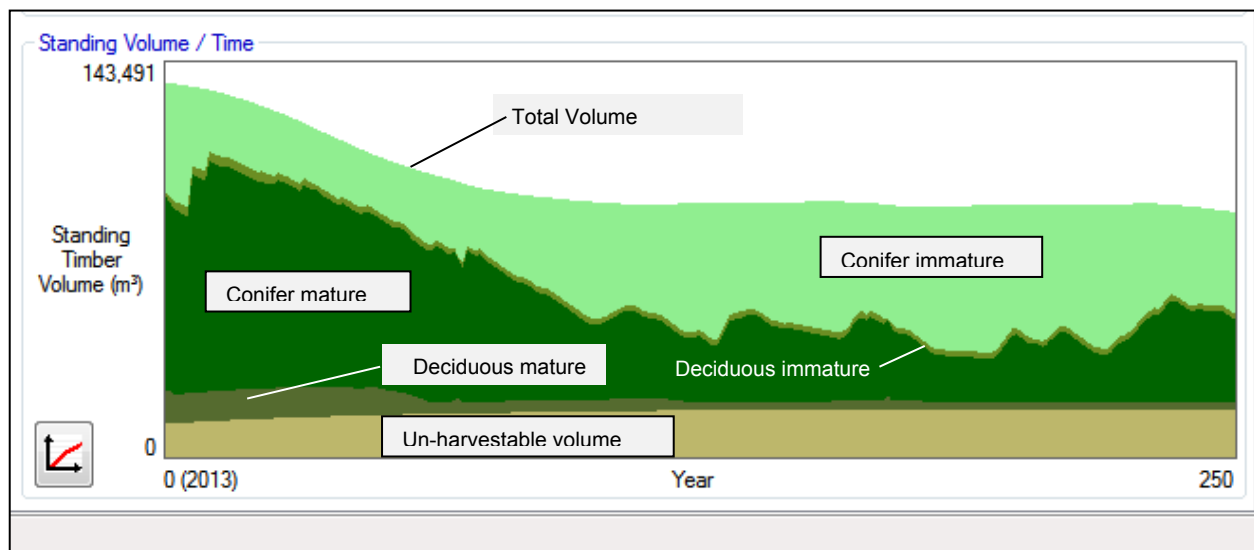

You can select a polygon or group of polygons in the Harvest Schedule, these will be highlighted on the graph for the periods selected.

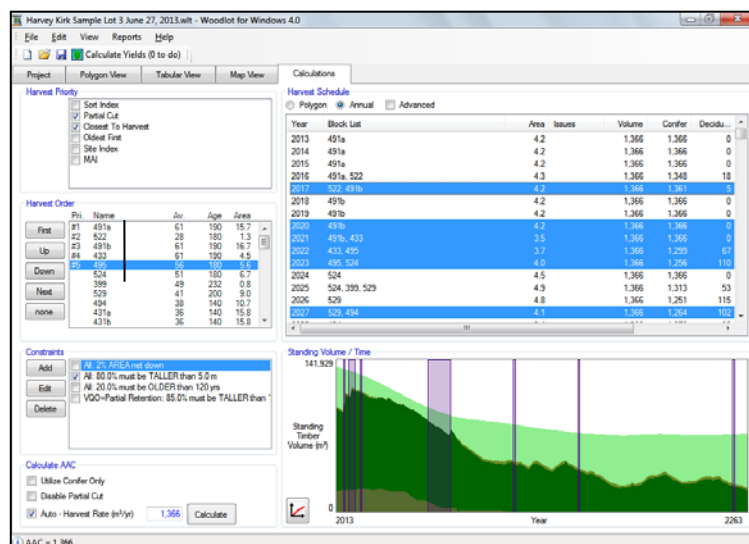


If you have forced a cut higher than the sustainable rate, vertical red bars or blue bars will be displayed in the graph for the times when there is not enough eligible volume to harvest. An “Issue” will be denoted in the Harvest Schedule Annual View Issues column describing what has not been met. This situation will normally occur if the manually forced harvest rate is higher than the auto-calculated harvest rate.

Red bars represent where a constraint will not be met, but there is sufficient volume. In this case, Woodlot will force the cut and indicate “Constraints” as the issue.

Blue bars represent where there is not sufficient merchantable volume to make the desired cut. In this case, Woodlot will harvest the little volume that is available or, if none is available, will defer the harvest until there is some volume available. In this case, Woodlot will indicate “Nothing to Harvest” as the issue.

Refer also to Manual Calculations above.

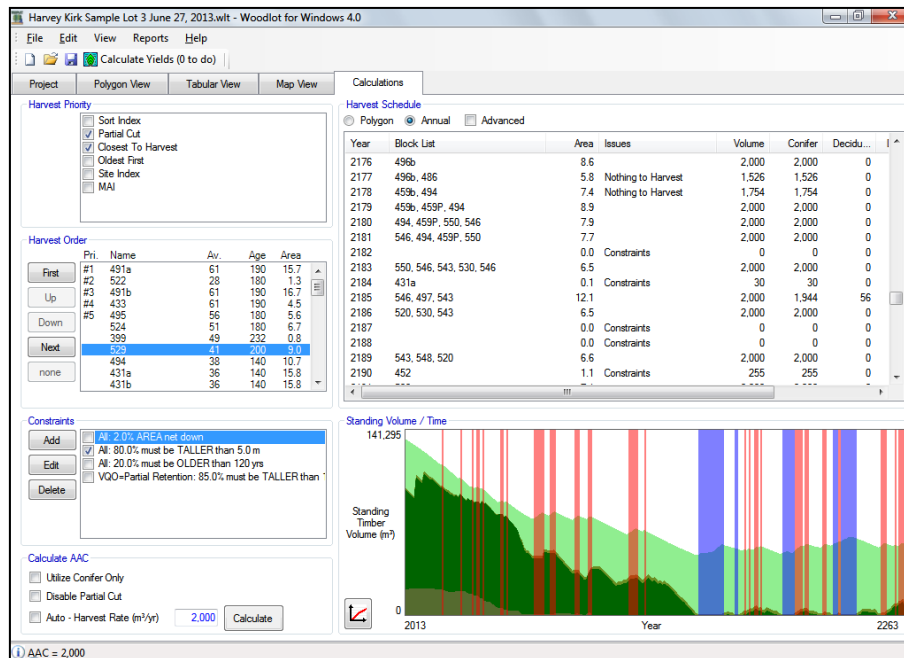


11. Reports and Graphs

Reports and graphics can be produced in Woodlot 4 to summarize the results of your analysis. Important data used in your analysis and generated in the harvest calculation is summarized in the woodlot report for your use and editing in MS Word. The report-writing feature works much the same way as in Woodlot 3.2, although it is now activated from the Report menu.

Graphing has been updated to utilize the FLNROD graphing program Plotsy. Plotsy is a powerful plotting program that will give you added flexibility for comparing scenarios and creating custom graphs for your woodlot. For more information on the use of Plotsy, please refer to the Plotsy Help menu or contact the FLNROD Forest Analysis and Inventory Branch.

To generate reports and graphs, from the Report menu item select one of the options listed. These are described below.

You will need to run a calculation or have a previous calculation run in order to generate a report. You will need to run a calculation when you generate graphs.

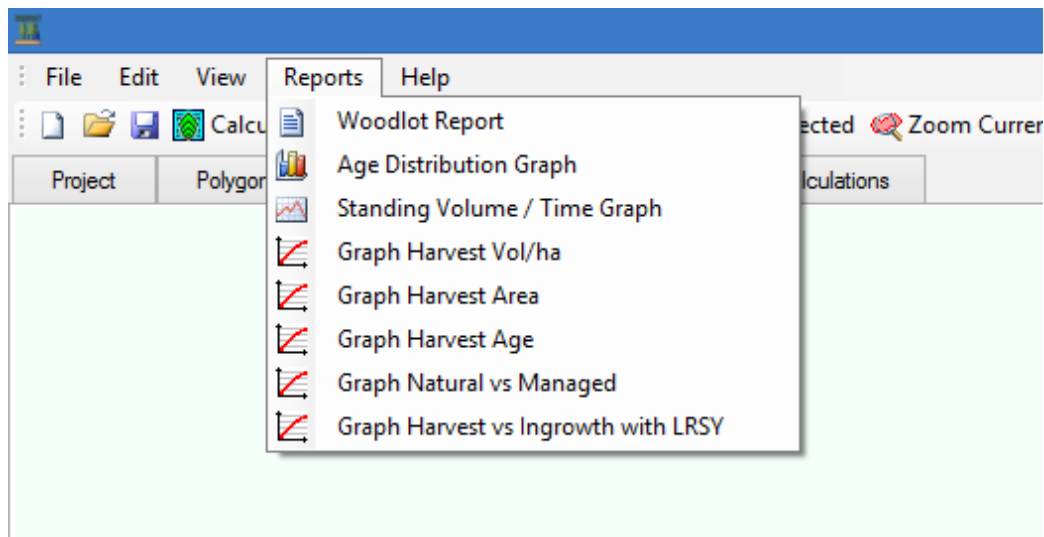

11.1 Woodlot Report

Select Woodlot report if you would like to generate a Woodlot Licence Harvest Planning report for the woodlot project you are working on. This will launch MS Word and display the report as a rich text file (rtf); a copy will be saved to your working directory as "report.rtf". You can make edits and add graphics as you normally would in MS Word. When you are finished editing, save the file as a .doc file.

The Woodlot report has been updated to include a section to display polygon comments.

The header has been updated to include project defaults.

Woodlot Licence Harvest Planning report

Date: April 23, 2019 - 2:00 PM
 Woodlot File: Interior VRI Sample Mar 5, 2018.wlt
 Harvest Rate: 11.053 m³/year
 Tenure:
 Company Name:
 User Name:
 Scenario Number:
 Forest District:

Beta 4.4.0.0 (April 18, 2019)
 VDYP Version: VDYP7Console 7.14b: 7, 14, 2, 81
 TIPSYS Version: BatchTIPSYS: 4, 4, 2, 0
 Sindex Version: Sindex: 1.52

Summary

Total Area: 1,704.4 ha
 Net Area: 1,704.4 ha
 THLB Area: 1,849.6 ha
 LRSY: 10.180 m³/year
 Existing Forest cMAI: 6.02 m³/ha/year

Woodlot Settings

Coast/Interior: Interior
 Default VDYP Utilization: 2G - Second Growth
 Default BEC: CWH
 Minimum Harvest Age: 40 years
 Minimum Harvest Diameter: 20 cm
 Minimum Harvest Vol/ha: 150 m³/ha
 Default TIPSYS OAF1: 0.85
 Default TIPSYS OAF2: 0.95
 P.C. Adjustment Factor: 0.80
 P.C. Minimum Vol/Ha: 50 m³/ha
 Planning Horizon: 250 years
 Base Year: 2018

Project Description: This is a new section added to Woodlot 4.3 in July 2018 by the good guys at Enfor.

1.0 Introduction

This section summarizes information used to calculate a long-term harvest rate on Woodlot Licence No. . The calculated harvest rate can be used to assist in determining the allowable annual cut (AAC). It should be assessed in light of the assumptions used, social and economic considerations in determining the AAC.

2.0 Summary

a) Area Summary

Description	Area (ha)	Area (ha)	Volume (m ³)	Polygons (#)
Total Area		1704.4		146
- Non-Forest		0.0		0
- Non FMLB (Rock)	0.0			0
- Non FMLB (Quarry)	0.0			0
- Non FMLB (Non-Productive)	0.0			0
- Non FMLB (Lake)	0.0			0
- Non FMLB (Ocean)	0.0			0
= FMLB (forest management land base)		1704.4	924,866.8	146
- Reduction	0.0			0
- Future Roads	0.0			0
= Net Area		1704.4	924,866.8	146
- Excluded (Constraints)		0.0		0
= Contributing Forest		1704.4	924,866.8	146
- Missing yield data	0.0			0
- Area Not down (constraint)	0.0			0
- Minimum Parameters Not met	51.4			5
- Silviculture System - Do Not Harvest	3.4			2
= THLB (timber harvesting Landbase)		1649.6	924,866.8	158

April 23, 2019
Page 1 of 4
Enfor Consultants Ltd.



11.2 Graphs


- **Age Distribution Graph** – select this to generate an age class distribution graph over time for the woodlot project you are currently working on. The woodlot project filename and AAC are displayed in the graph header.

Graphs are generated in Plotsy and can be exported from Plotsy in several graphics file formats, which you can later import into a report. It is best to maximize the Plotsy window before export to improve the resolution of the exported graphic.


Age class distribution graphs are saved with your woodlot (.wlt) file.

You can choose between two age class distribution graph templates provided in Woodlot:


- o **Age Class Distribution – Over Time.** Displays the age class distribution of the forest in 50-year increments from current date using a multi-colour age class distribution graph. (Current year = 0.)

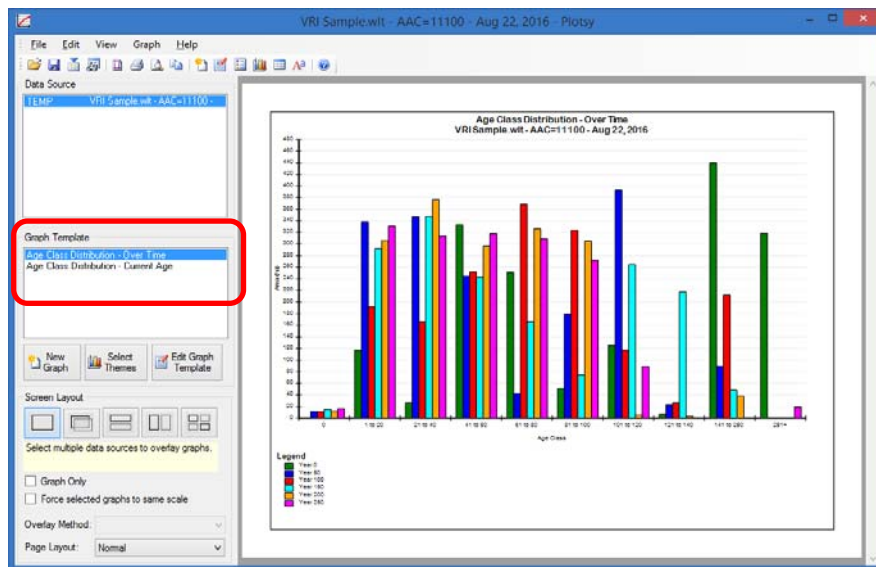


- o **Age Class Distribution – Current Age.** Displays the age class distribution of the forest as of today using a single colour age class distribution graph. (Current year = 0.)

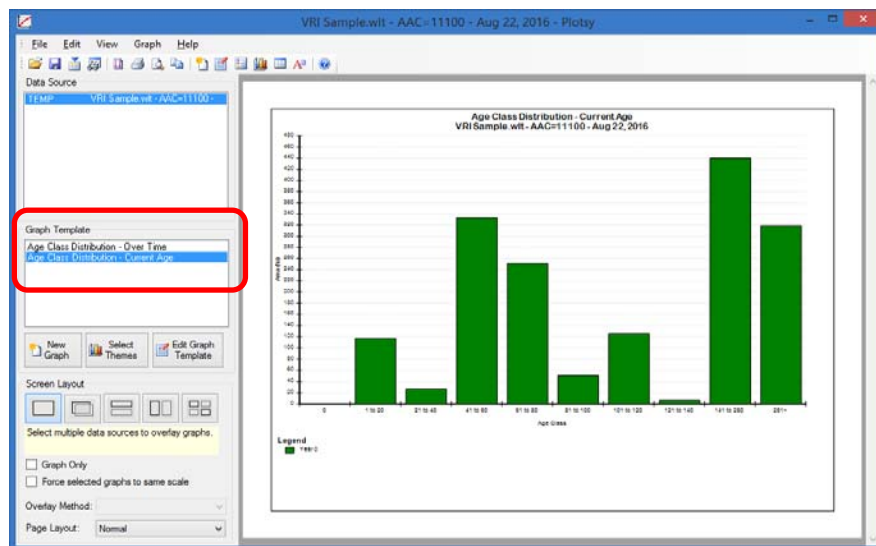


- Standing Volume/Time Graph** – select this to generate a graph of merchantable volume over time for your woodlot project. Graphs are generated in Plotsy and can be exported from Plotsy in several graphics file formats, which you can later import into a report. It is best to maximize the Plotsy window before export to improve the resolution of the exported graphic.

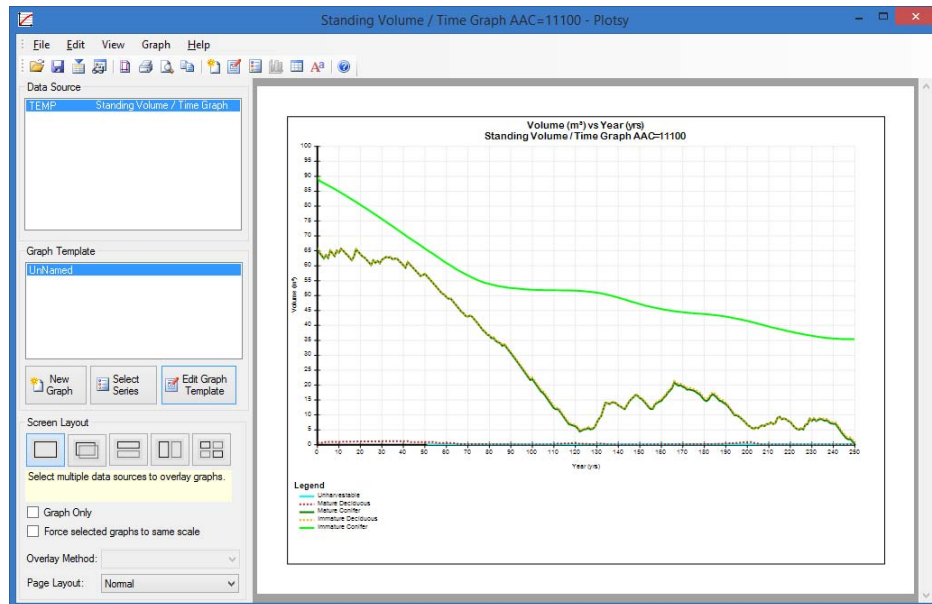

- Harvest Vol/ha Graph** – added in July 2018, this provides a graph of the average volume per hectare harvested (m^3/ha) each year for your harvest calculation.

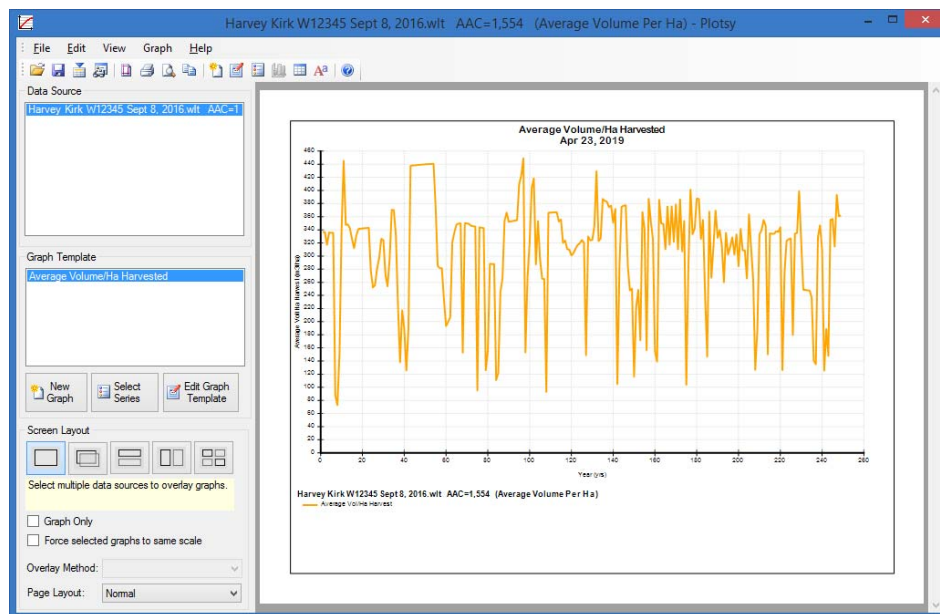

- **Harvest Area Graph** – added in July 2018, this provides a graph of the average amount of area harvested (ha) each year for your harvest calculation. The area is also displayed in the Calculation tab Harvest Schedule.

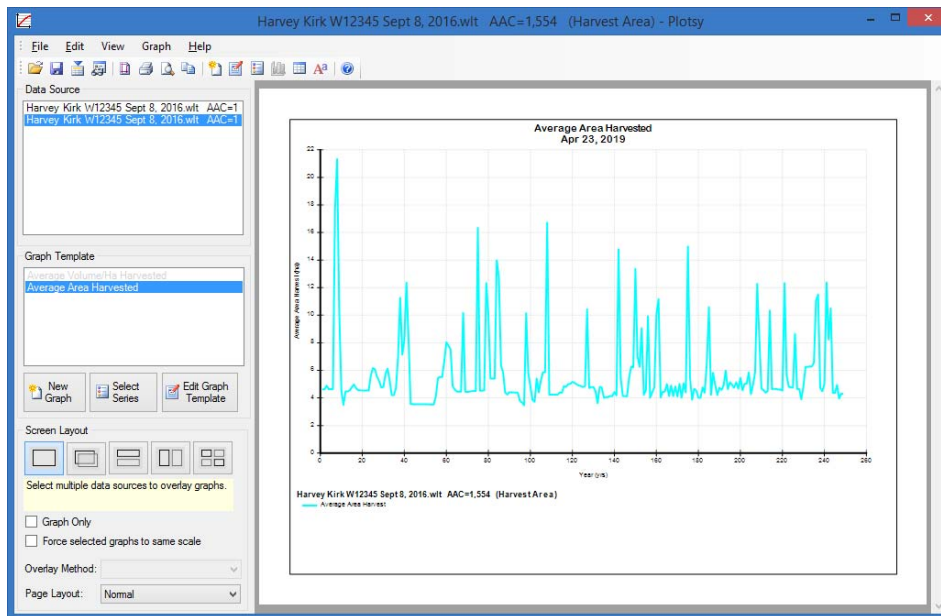


Partial cut polygons include the area of the partial cut polygon harvested and displayed in the Harvest Schedule. Clearcut polygons include the area of the clearcut polygon harvested and displayed in the Harvest Schedule.


Polygon	Own...	Pro...	Rot...	Method	Start	End	Volume	Area
092C085 34	Crown	1,000	1	1st Partial Cut	2018	2018	2,504	28.9
092C095 187	Crown	228	1	Clearcut	2018	2018	6,377	7.9
092C095 204	Crown	227	1	Clearcut	2018	2018	1,912	2.3
092C095 207	Crown	222	1	Clearcut	2018	2020	14,989	19.5
092C095 188	Crown	227	1	Clearcut	2020	2020	365	0.7
092C095 185	Crown	220	1	Clearcut	2020	2020	1,051	1.6
092C095 73...	Crown	219	1	Clearcut	2020	2023	36,371	44.3
092C085 35	Crown	216	1	Clearcut	2023	2023	1,354	2.2
092C095 106	Crown	215	1	Clearcut	2023	2024	4,224	5.9
092C085 41	Crown	215	1	Clearcut	2024	2024	2,951	5.0
092C095 218	Crown	214	1	Clearcut	2024	2024	2,951	5.0
092C095 217	Crown	215	1	Clearcut	2024	2025	2,350	3.8
092C095 101	Crown	216	1	Clearcut	2025	2026	20,468	32.9
092C095 98	Crown	213	1	Clearcut	2026	2026	763	1.4
092C095 98	Crown	213	1	Clearcut	2026	2027	9,979	12.9
092C095 103	Crown	208	1	Clearcut	2027	2028	2,915	5.8
092C095 286	Crown	207	1	Clearcut	2028	2028	2,165	2.5
092C095 108	Crown	207	1	Clearcut	2028	2028	2,802	3.2
092C095 273	Crown	201	1	Clearcut	2028	2028	482	0.6
092C095 271	Crown	201	1	Clearcut	2028	2028	3,352	4.3
092C095 107	Crown	201	1	Clearcut	2028	2029	1,618	3.9
092C095 272	Crown	202	1	Clearcut	2029	2029	8,531	10.8
092C085 40	Crown	201	1	Clearcut	2029	2030	8,744	23.4
092C095 216	Crown	202	1	Clearcut	2030	2032	18,003	48.1
092C095 214	Crown	203	1	Clearcut	2032	2032	254	0.8



- **Harvest Age Graph** – added in July 2018, this provides a graph of the average stand age (yrs) harvested in each year for your harvest calculation.

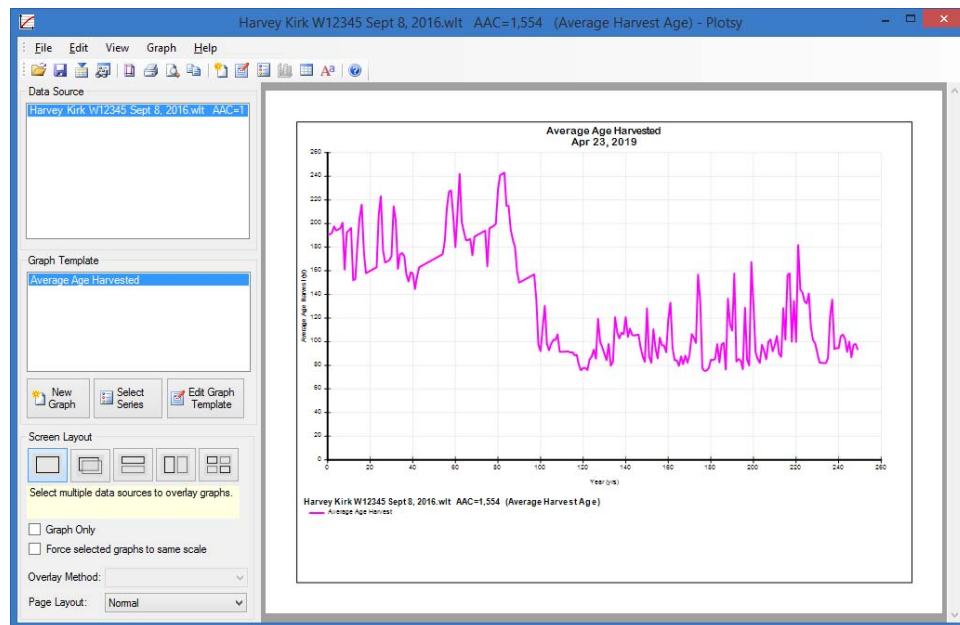


- **Natural vs Managed Graph** – added in July 2018, this provides a graph of natural volume (m3) harvested versus managed volume (m3) harvested in each year of your harvest calculation.

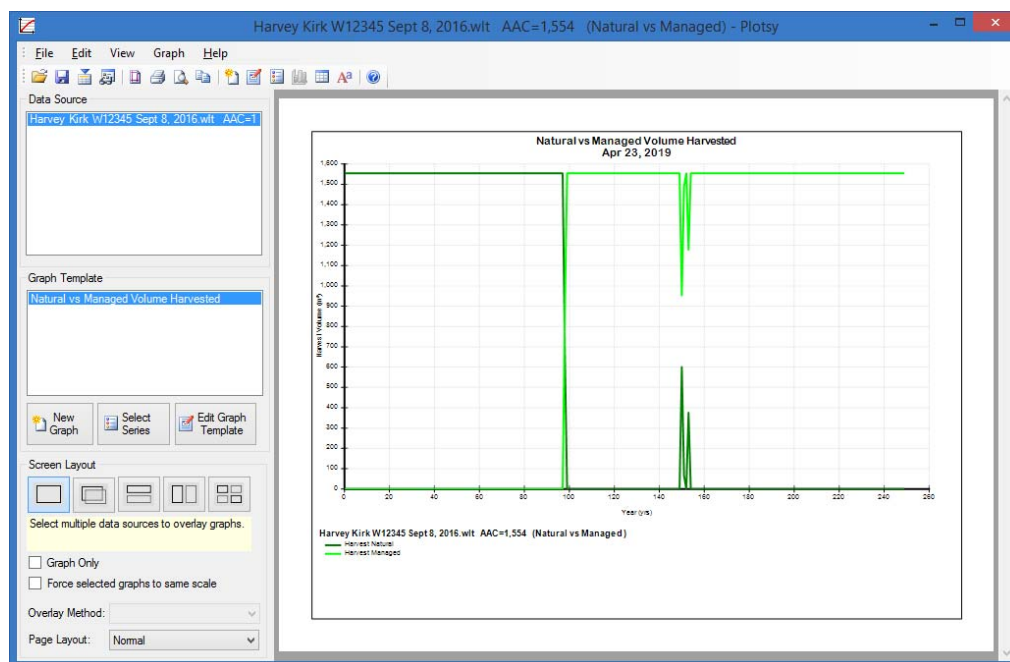

- **Harvest vs Ingrowth with LRSY Graph** – added in July 2018, this provides a graph of the volume (m3) harvested each year (shown as dark green in this example) versus the ingrowth volume (m3) each year (shown as light green in this example).


Also shown is the LRSY level (m3/yr.) (shown in cyan in this example) as a quick reference.

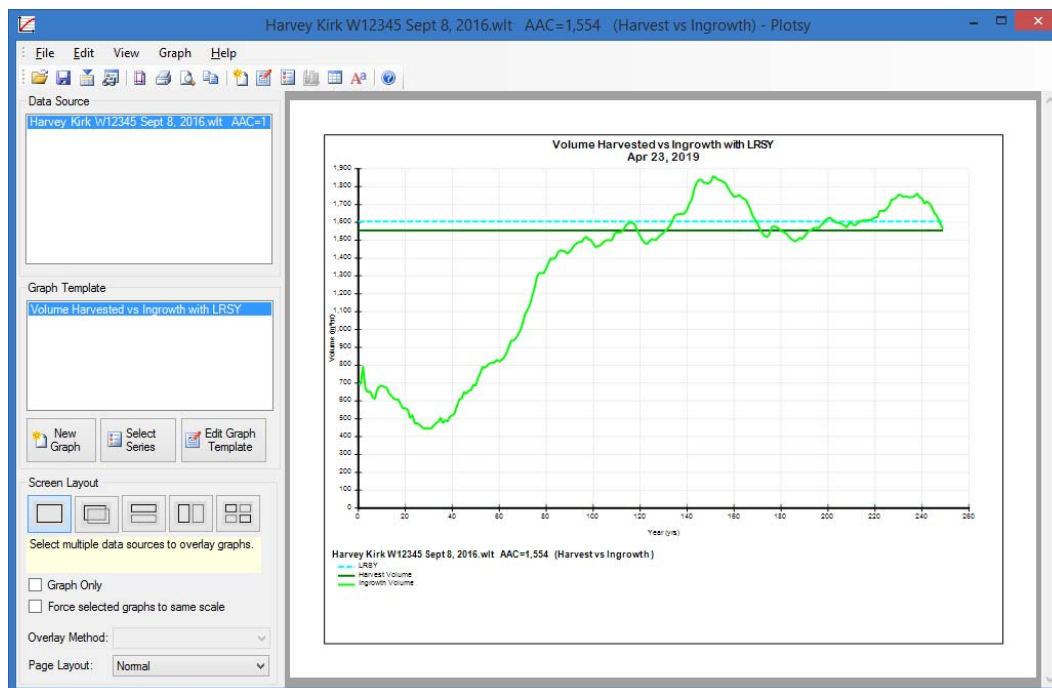

Interpreting the Standing Volume/Time Graph

The volume over time graph displays merchantable volume (m³) on your woodlot project in the following sequence of layers, which add cumulatively to the total line at the top. The volume attributed to each category is measured as the vertical distance drawn between each layer. Volumes are reported in the Calculation Screen Harvest Schedule (Annual Advanced) and also in Plotsy (click the View Data Source icon). For the example below, the merchantable volumes are:

- Total merchantable volume: shown by the top line as cumulative of all volumes (e.g. 539,353 m³).
- Immature Coniferous volume: volume between the light green line and goldenrod dashed line (e.g. 170,462 m³).
- Immature Deciduous volume: volume between the goldenrod dashed line and dark green line (e.g. 2,148 m³).
- Mature Coniferous volume: volume between the dark green line and brown dashed line (e.g. 364,985 m³).
- Mature Deciduous volume: volume between brown dashed line and cyan line (e.g. 1,231 m³).
- Un-harvestable volume: volume between the cyan line and bottom of graph (e.g. 528 m³).

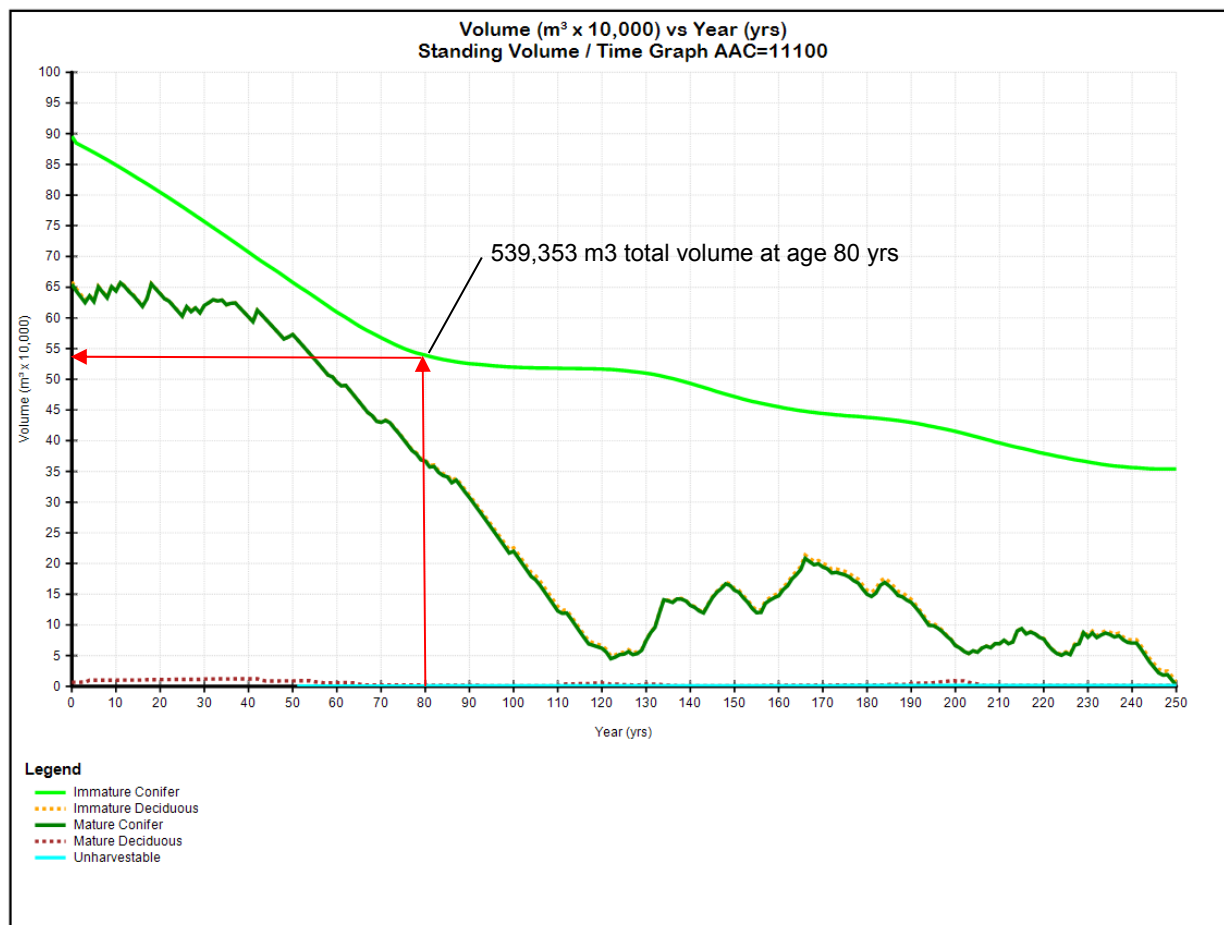

12. Other Improvements to Woodlot

Several other improvements have been added since creating Woodlot 4.


In Woodlot 4.3:

- A new zoom feature was added to the map.
- Fixed column width issues on the Tabular screen.
- Adjusted Classifiers so they are not case sensitive.
- Improved column formatting in the Woodlot report.
- Force the BEC to refresh on each forest polygon if the global BEC is changed in the Project screen.
- Fixed the Area on FMLB Summary, section 2a in the Woodlot report.
- Fixed Volume per Hectare (VPH) rounding.

In Woodlot 4.4:

- Woodlot now validates the project settings before allowing you to view a yield curve.

A warning message will be displayed if you have not set your region or other project default parameters in the Project tab. If you get this warning, please return to the Project tab to check and update your project defaults.

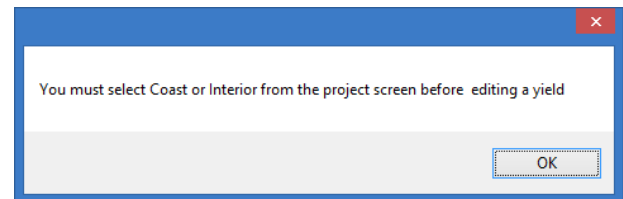

- Stand age checking has been updated. Entering a stand age of 0 or lower was setting established year to 0 not relative to the current year like 2019.

For example, now if the age is less than -20 then the stand age will be set to 0 and an "n/a" will be displayed. If the year is 2019 and -20 is entered the established year would be 2039 (2019 - -20), but if -21 was entered the stand age would be set to 0 and n/a would be displayed.

- The Disable PC feature now also forces the harvest priorities to treat PC as CC.



13. For More Information

We hope that you find Woodlot 4 useful. Should you have any questions please contact one of the following:

**Ministry of Forests, Lands and Natural Resource Operations and Rural Development
Forest Tenures Branch**

Victoria, BC
V8W 9C2 Canada

Website: <https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool>

**Ministry of Forests, Lands and Natural Resource Operations and Rural Development
Forest Analysis and Inventory Branch**

Victoria, BC
V8W 9C2 Canada

Tel: (250) 356-5947

Website: <https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/timber-supply-review-and-allowable-annual-cut>

Federation of BC Woodlot Associations

Brian McNaughton, General Manager
381 Pheasant Road
Williams Lake, BC
V2G 5A9 Canada

Tel: 1 (866) 345-TREE (8733)
Email: gen_manager@woodlot.bc.ca
Website: <https://woodlot.bc.ca/>

Woodlot licensees may contact the following for user support questions:

Mike Bandstra, RPF
Email: mbandstra@forsite.ca
Tel: (250) 847-4822.


Ministry staff and other users may contact the following for Woodlot timber supply analysis questions:

Doug Beckett, RPF
Forest Analysis Section,
Ministry of Forests, Lands, Natural Resource Operations and Rural Development
Prince George
Email: Doug.Beckett@gov.bc.ca
Tel: (250) 565-6265



Appendix 1 Silviculture Systems in Woodlot


Woodlot 4 offers two silviculture systems for timber supply analysis, clearcut and partial cut. Silviculture systems can be selected by forest polygon. In the Polygon View tab, select the silviculture system in the Existing Forest section. Refer also to Section 7.9.1 of this user guide.

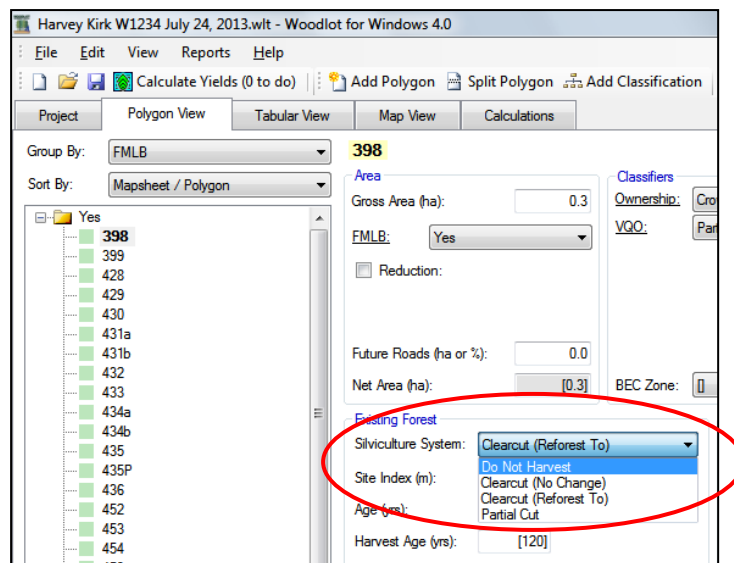

The clearcut method also provides for commercial thinning of certain species in managed stands by way of using TIPSy when you select your yield settings.

Clearcut

The first harvest entry will occur at or later than the harvest age selected in Polygon View. The actual harvest age will depend on the order selected in the Calculations tab and actual position in the queue of polygons being harvested. (Note that the minimum volume Graphically, the clearcut methodology is as follows:

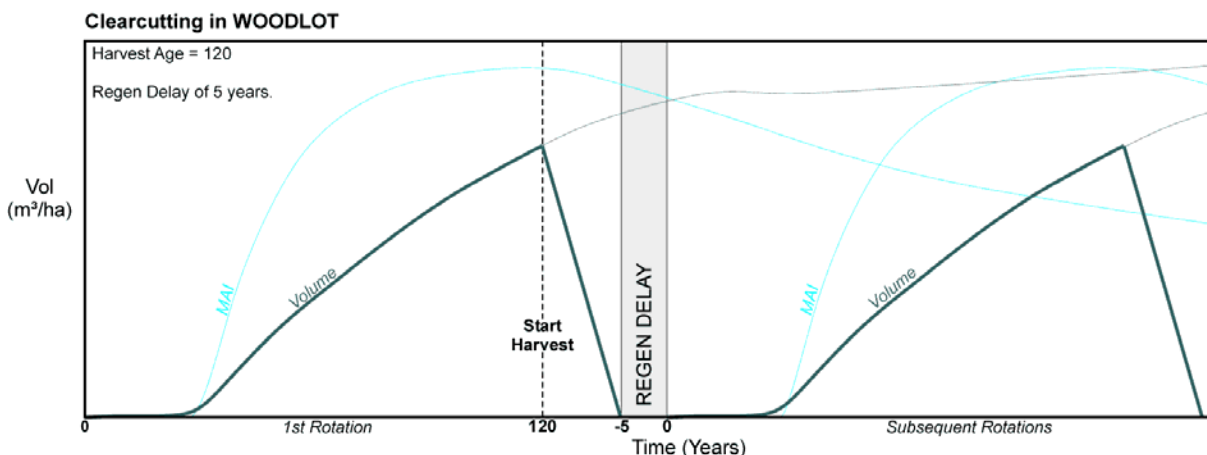

Partial Cut (Average Age Method)

The following appendix describes the functionality of the “average age” partial cut feature, used in Woodlot 3.2 and carried over to Woodlot 4.

How the Average-Age Partial Cut Method Works (and PCAF)

Woodlot 4 uses, as one method, a simple approximation “average age” technique to predict future yields and measure in-growth from partially cut stands, using VDYP natural yields and a Partial Cut Adjustment Factor (PCAF). This approximation technique is considered to be most accurate when a stand is harvested close to its culmination age. It may be appropriate to use a different PCAF with adequate justification.

This method is used in the absence of yield models for partially cut stands in BC and has been accepted by FLNROD staff for use in Woodlot. (PrognosisBC was considered for use in Woodlot but has not been included due to the small number of ecosystems that it supports and the lack of ground cruise plots to run it.)

Woodlot 4.2 defaults to require a minimum 50 m³/ha before re-entry on partial cut stands. This will avoid a user accidentally specifying a re-entry % where the resulting re-entry volume is unreasonably low (e.g. 2 m³/ha). Woodlot will defer harvesting a polygon until the new minimum is reached. Users can over-ride the default by entering their own minimum re-entry volume.

In Woodlot, partial cutting works in the following manner:

1. In the Polygon View tab, navigate to Existing Forest. At Silviculture System, select Partial Cut. In the Reforest window, a Partial Cut feature will display. Select Average Age, the % removal and re-entry period.
2. Click the Calculate Yields toolbar. Yield curves are derived, as they would be for all polygons. Partial cutting uses only VDYP natural yields in Woodlot.
3. The first harvest entry will occur at or later than the harvest age selected in the Polygon View tab. The actual harvest age will depend on the order selected in the **Calculations** screen and actual queue in the line of polygons being harvested. A volume of timber is removed which effectively reduces the stand to the same condition it would be in at an earlier age with the same residual volume; the stocking and growth characteristics will be assumed to be the same as the fully stocked younger stand unless a Partial Cut Adjustment Factor is used to simulate the short term retarding effect of partial cutting (see below). Woodlot moves the stand growth down the yield curve to this reduced volume/ha point on the volume-age curve where it restarts growing from.
4. To measure volume removed on the first entry, Woodlot will first determine the residual volume *to be reduced to* base on the % removal. The residual volume is the difference in volume at the specified harvest age, less the % removal.
5. To model the in-growth and volume to be removed on subsequent entries, the residual volume is compared to the VDYP yield curve and assumed to grow like a similar stand in




stocking at the younger age that matches this residual volume. The stand is assumed to grow at the same rate and stocking as the naturally occurring well-stocked stand did (adjusted as noted below for a PCAF) and is re-harvested at the specified re-entry period.

6. To adjust for any upward or downward bias in this methodology due to regeneration lags, crown expansion, and other factors that may affect the recovery of a stand, a Partial Cut Adjustment Factor (PCAF) was introduced. The yield generated is reduced (or can be increased) by this amount. Woodlot defaults the PCAF to 0.8, which assumes a conservative 20% reduction on ingrowth to account for the methodology bias.

A PCAF of 1 assumes that the ingrowth will not be affected by a partial cut and will produce yields at exactly the same rate (and shape of the yield curve) for the ingrowth period as it would if the stand had not been harvested at all.

The PCAF can be reset in the Harvest Parameters screen. The PCAF is applied to the in-growth, and the net amount is used for harvest calculations (i.e. volume used for partial cut polygon in harvest calculations = in-growth * PCAF).

7. At re-entry age, the in-growth is removed, and the stand is reduced to the younger age again. The stand re grows again, until it is harvested at the next re-entry period, and the cycle continues. A graphical and tabular example is provided below for the average-age method for partial cutting in Woodlot 4. (Note: numbers in the graph may not agree with table due to changes in the way Woodlot 4 now handles partial cutting. Tabulated numbers are correct; the graph is correct in concept.)

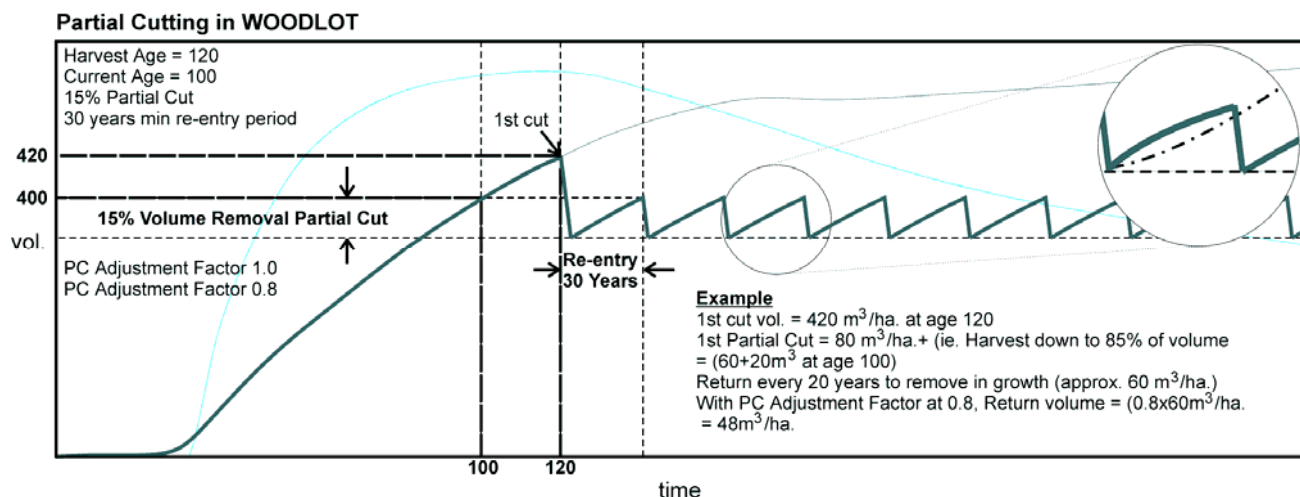

The neat stair step with consistent harvest volume shown above is the desired partial cut yield scenario.

Inappropriate combinations of (a) the interval between partial cut harvests and (b) the percent of stand volume removed at each harvest can lead to unintended results. Harvesting too much/too soon will drive net stand volume towards zero over time, and lead to underestimation of AAC. Cutting too little/too infrequently will result in accumulation of unharvested volume, and lead to underestimation of AAC. Review of the detailed harvest records (tell them where access to details it is discussed) and fine tuning of harvest parameters for stands managed under a partial cut regime is recommended.




Example Item	Numerical values	Comment
Current Age of stand (years)	110 years	Does not affect calculations. If the current age is > the harvest age, then the current age and volume at this age will be used for the first harvest age.
Target Harvest Age (years) (existing Management = 1 st harvest age)	100 years	User selected.
Example actual harvest age (years)	120 years	Typical example actual harvest age used by Woodlot due to delayed sequence in Calculations or queue
Total Volume at actual harvest age (m ³ /ha)	420 m ³ /ha	VDYP generated.
% volume to be removed	15%	User selected. This will reduce the volume available to 85% of the volume at the actual harvest age.
Minimum Re-entry period (years)	30 years	User selected. This is the in-growth period. Volume grown over this period will be harvested on the next entry.
Residual Volume (Volume to be harvested down to) in all partial cuts (m ³ /ha)	$420 - (15\% \times 420) = 357 \text{ m}^3/\text{ha}$	Woodlot calculated as the residual volume to measure from.
Volume removed at first harvest (m ³ /ha)	$420 - 357 = 63 \text{ m}^3/\text{ha}$	Volume that Woodlot will include in the harvest rate calculations for the first entry.
Assumed stand age which in-growth is assumed to occur from (years)	Volume of 357 m ³ /ha occurs at 85 years' age on a normal VDYP stand	VDYP generated.
<i>Regen Delay</i>	<i>N/A</i>	<i>This feature was removed in version 3.1</i>
Assumed stand age at next and subsequent harvests (years)	$85 + 30 \text{ years} = 115 \text{ years}$	Woodlot will use the volume at this age.
Volume for a normal stand at 115 years (m ³ /ha)	410 m ³ /ha	
In-Growth (m ³ /ha)	$410 - 357 = 53 \text{ m}^3/\text{ha}$	Unadjusted in-growth, which will vary depending on the actual subsequent harvest age.
PCAF	0.8 (Default Value)	Partial Cut Adjustment Factor is user selected. The default value assumes a 20% reduction in volume to account for a possible overestimation from fully stocked and full density clearcut based yield curves at the corresponding age.
In-growth volume used for subsequent harvest calculation	$0.8 \times 53 \text{ m}^3/\text{ha} = 42.4 \text{ m}^3/\text{ha}$	Volume that Woodlot will include in the subsequent harvest rate calculation.



Appendix 2 Managed or Natural Stands

(Source: Ministry of Forests, Lands and Natural Resource Operations website <http://www.for.gov.bc.ca/hre/gymodels/GY-Model/compare.htm#ComparingandSelectingModels>, July, 2013)

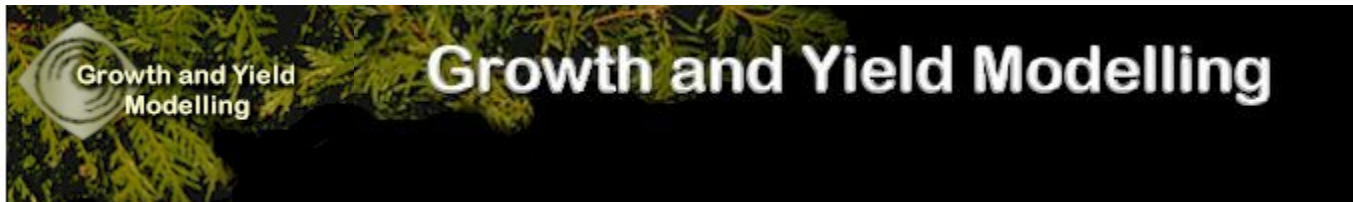

Comparing and Selecting Models

Table 1 (see following page) lists and compares a number of model characteristics and features that may be helpful in selecting an appropriate model for a given situation. Even though there are several models available, it is entirely possible that there may be situations where none of them are appropriate or where even the "best" one should be used with caution. There are a few simple, intuitive steps or questions that can help us select growth and yield models.

- Keep in mind your intended application; for example, is it silviculture, inventory or planning?
- What type of stand do you have and what kind of information do you currently have about it? You can set aside models that are not calibrated for your species and stand types. You can also determine if you currently have sufficient data to run a particular model, as some require more detailed data than others (e.g., permanent sample plot data versus inventory data).
- What type of density management treatment(s) you are interested in and how much treatment flexibility do you require? Although all the models in the table have some capability for stand density management, most only support a limited number of options.
- Finally, you will no doubt be exposed to conflicting results regarding these and other growth and yield models. Some differences are due to the models themselves but others stemming from an emphasis on biology versus economics, or different interpretations of the historic theory versus science. Data from reproducible experiments should always be the ultimate arbitrator for both scientific theories and models. ***"In God we trust; all others bring data"*** (K. Iles, personal communication)

Please also refer to <https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/growth-and-yield-modelling> for more information on comparing and selecting growth and yield models in BC (April 30, 2019).



Table 1. Model Comparison Table (Stearns-Smith, 1999)

	<u>Prognosis BC</u>	Mixedwood Growth Model (MGM)	Variable Density Yield Prediction (VDYP)	Tree and Stand Simulator (TASS)	Table Interpolation Program for Stand Yields (TIPSY)
Developer	USFS Intermtn variant adapted to BC by BCFS	Steve Titus, U of Alberta	BCFS	Ken Mitchell, BCFS	BCFS
Distributor and Cost	BC MOF (free)	U of Alberta free (web)	BC MOF (free, web)	not distrib. BC MOF does free runs	BC MOF (free, web)
Model Type	Individual tree, distance independent	Individual tree, distance independent	whole stand	Individual tree, distance dependent	see TASS
Tree Input Data	Tree list	Tree list or stand description	Species composition, crown closure	Establishment density & spatial dist.	Establishment density
Site Productivity Input	Not SI, uses BC BEC and physiography	Site Index (SI)	SI	SI	SI
Species	Pw, Lw, Fd, Bg, Hw, Cw, Pl, Se, Py, Hm	Sw, At, Pl, (Sb)	32 commercial BC species	Fdc, Fdi, Hwc, Hwi, Ss, Bg, Cw, Pl, Sw	Fdc, Fdi, Hwc, Hwi, Ss, Bg, Cw, Pl, Sw (see notes below)
Stand Types	single and mixed-spp, even and uneven aged	mixedwood, even and uneven aged	single and mixed-spp, even aged	single-spp, even aged	single-spp, even aged (multi-spp area prorated)
Post-estab. activities supported	PCT, partial cutting	PCT, partial cutting		PCT, partial cutting, fertilization, pruning	PCT
Other growth modifiers	root disease		Decay, waste and breakage and VAF's	OAF's, some pests and diseases	OAFs, Lodgepole repression
Output besides yield tables	projected tree lists, diameter distributions	projected tree lists, crop plans	ave diameter and culmination MAI	stand and tree visualization, wood characteristics, projected tree lists, etc.	diameter distribution, lumber and logs, mortality and snags, economic analysis
Development Data Sources	USFS CFI and EP plus PSP from BC S. Interior	Alberta PSP	TSP	PSP & EP. BC, AB, WA, OR	see TASS
Unique Features & Applications	partial cutting in complex stands; pest and habitat models available	boreal mixedwood Requires EXCEL 97	natural stands CFI updating and timber supply analysis	spatially explicit; crown based, timber supply analysis, custom runs on request	yields from TASS, timber supply analysis and economic analysis

Abbreviations: BC MOF=BC Min of Forest; USFS=US Forest Service; OMNR=Ontario Min of Nat Res; CFS=Canadian Forest Service; PCT=pre-commercial thinning; EP=experimental plots; PSP=permanent sample plots; TSP=temporary sample plots; CFI=continuous forest inventory; OAF's=operational adjustment factors, VAF's=volume adjustment factors; MAI=mean annual increment; BEC=Biogeoclimatic Ecological Classification

Notes: TIPSY has been updated since the date of this publication to now include species At and Dr. Bg is derived from HWC.



Managed vs. Unmanaged Stands What Model Might be used?

(Source: Ministry of Forests, Lands and Natural Resource Operations website <http://www.for.gov.bc.ca/hre/gymodels/GY-Model/compare.htm#Managedvs.UnmanagedStandsWhatModelMightbeused?> , July, 2013)

The following information will help planners identify **managed vs. unmanaged** stands (polygons), for the application of appropriate yield models (curves). The distinction is important because managed stands tend to be more productive. A decision tree is provided to help make the distinction between **managed** and **unmanaged** stands and suggest yield models for various stand types (Nussbaum, 1998).

Managed stands

Managed stands are even-aged stands that have benefited from management activities to encourage their growth potential. They have known establishment conditions including species, density, and distribution of stems. **Managed** stands can be:

- planted or natural origin but have not experienced repression or overstory competition.
- harvested stands regenerated after 1986 that have achieved "free growing" status, as specified in the regional free growing guidebooks. For stands regenerated before 1987, silviculture records, management plans, and local knowledge are needed to determine if stands are managed.
- young spaced and fertilized stands if the establishment conditions can be approximated
- partially harvested stands, such as commercially thinned stands if they were unsuppressed or unrepressed during establishment, establishment conditions can be approximated, and removals are documented.

Unmanaged Stands

Even-aged stands have not had the benefits of management and their establishment conditions are unknown. Although some stands may achieve their potential, others may have inadequate stocking, experience overstory competition, or repression.

Uneven-aged stands are considered **unmanaged** for this exercise, as the concept of establishment conditions holds little meaning, and a large number of stems could be suppressed by an overstory. These stands generally contribute to non-timber objectives where maximizing growth is not the primary concern. They have historically been handled as "naturals".

Refer also to https://en.wikipedia.org/wiki/Forest_growth_models_of_Canada for more information on modeling managed vs unmanaged stands.

What's the Difference?


Recall that a managed stand has had some level of stocking control provided, often a result of planting or spacing or some level of human effort to bring the stand to a free growing state. While an unmanaged stand is typically a naturally established stand that has had no human activity influence in its establishment or to bring to a free growing state, often associated with naturally occurring wild stands. A stand that results by natural regeneration after a harvest is not an unmanaged stand because it was initiated (cleared) as a result of human activity.



Models Decision Tree

(Source: Ministry of Forests, Lands and Natural Resource Operations website <http://www.for.gov.bc.ca/hre/gymodels/GY-Model/flochart.htm> , July, 2013)

Forest growth and yield models have been developed for many different purposes. It is important to choose the proper model and understand its assumptions and limitations. Models can be sophisticated computer models or simple yield tables derived from appropriate data.

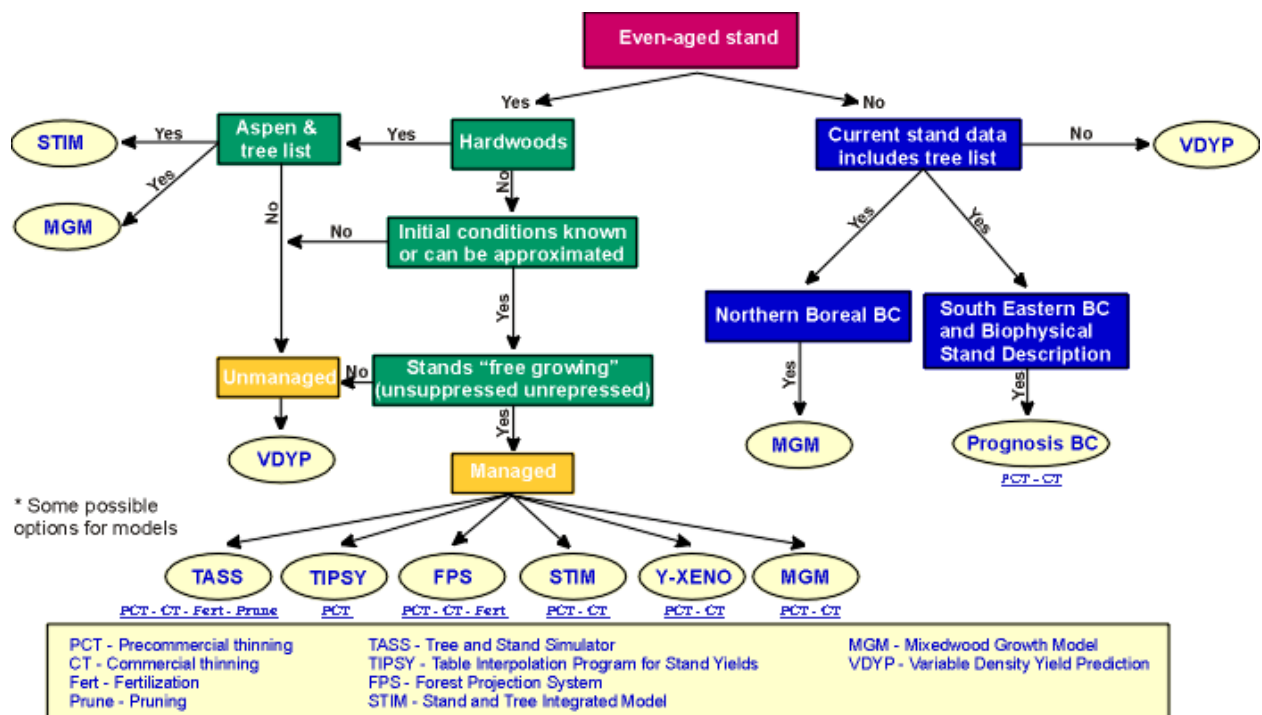

* Note: This doesn't constitute Ministry of Forests approval of all yield curve outputs from these models, nor does it restrict use to just these models.

A word of caution about models!

(Source: Ministry of Forests, Lands and Natural Resource Operations website <http://www.for.gov.bc.ca/hre/gymodels/GY-Model/compare.htm#ModelsDecisionTree> , July, 2013)

Forestry and statistically based biological experimentation are both relatively new sciences whose joint development is governed largely by the (slow) rate of tree growth. Seeming contradictions among the limited existing experiments serve to highlight our imperfect understanding of complex biological systems and discourage risk-laden investment decisions based on limited (or select) information. Decision making given imperfect information requires risk analyses that take into account the uncertainties regarding future biological and economic consequences. Models can be important tools, but we should not rely solely on them for making decisions. Use your professional judgment to examine your own data and assumptions before making the final management decision.



Model Application and Use

(Source: Ministry of Forests, Lands and Natural Resource Operations website <http://www.for.gov.bc.ca/hre/gymodels/GY-Model/compare.htm#ModelsDecisionTree> , July, 2013)

Selecting a model is only half the battle. Proper use of a model also depends on proper selection and preparation of the input data and proper interpretation of the model output. This is why most regulatory agencies avoid any open or implied sanctioning of specific models in favour of yield table approvals.

The main uses of growth and yield predictions are to:

- increment and update forest inventories
- compare silviculture treatments by simulating treatments and predicting outcomes
- influence stand and forest level decision making
- provide input for forest management planning including timber supply analysis, Allowable Annual Cut (AAC) determinations and policy making
- assess the impact of timber losses due to pests and fire
- allow extrapolations for missing or inadequate data
- explore and teach tree and stand dynamics

The application of any model in silviculture decision support also requires a clear statement of management objectives translated into appropriate quantitative values that can be identified in model output. Care must be taken to understand the implications and limitations of using various quantitative measures as surrogates for management objectives.



Appendix 3 VDYP vs TIPSY

(Source: adapted from TIPSYS 4.3.0 Help File, Ministry of Forests, Lands and Natural Resource Operations, May 6, 2013 and the VDYP7 website <http://www.for.gov.bc.ca/hts/vdyp/> July, 2013)

VDYP 7

The Variable Density Yield Prediction (VDYP 7) Model is an empirical yield prediction system that replaces VDYP6. The new model is more sensitive to changes in stand density such as basal area and trees per hectare. It is intended for use in unmanaged, natural stands of pure or mixed species composition. VDYP 7.0 was released on 2nd April 2007.

The VDYP system was developed by Resources Inventory Branch (now the Forest Analysis and Inventory Branch of the Ministry of Forests and Range) using randomly located plots that cover the full range of conditions found in our forestland base. Consequently, VDYP projects the average yield of naturally regenerated stands that have not been treated. The empirical yields from VDYP will invariably be lower than the potential yields given by TASS and TIPSYS, although TIPSYS yields can be adjusted for operational conditions.

Density traditionally refers to any quantitative measure of crowding in stands. In TIPSYS we use Number of Trees/ha (see Number of trees). "Residual Density" refers to the number of trees alive after thinning. For more information on VDYP, please refer to:

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/growth-and-yield-modelling/variable-density-yield-projection-vdyp>

TIPSY (TASS)

TASS generates the yield tables in TIPSYS's database. TASS is a computer model that simulates the growth of individual trees and stands in three dimensions. The crowns of individual trees expand and contract asymmetrically as branch extension responds to internal growth processes, physical restrictions imposed by the crowns of competitors, environmental factors and silvicultural practices. The crowns add a shell of foliage each year that benefits the trees in diminishing amounts for several years. The volume increment produced by the foliage is distributed over the bole annually and accumulated to provide tree and stand statistics.

TASS is based on growth trends observed in fully stocked research plots growing in a relatively pest free environment. The yields will be very close to the potential of a specific site, species and management regime. Research Branch maintains the system. For more information on TIPSYS (TASS), please refer to: <https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/growth-and-yield-modelling/table-interpolation-program-for-stand-yields-tipsy>


The latest version of TIPSYS and VDYP is available from:

<https://www2.gov.bc.ca/gov/content/industry/forestry/managing-our-forest-resources/forest-inventory/field-forms-and-software/software-download>



Appendix 4 Tree Species Used in Woodlot 4

Table 5-1 below provides a list of VRI tree species codes used in Woodlot 4, with the cross-reference to VDYP tree species codes and TIPSy tree species codes. For more information, refer to Section 6.5 and refer to the Project tab.

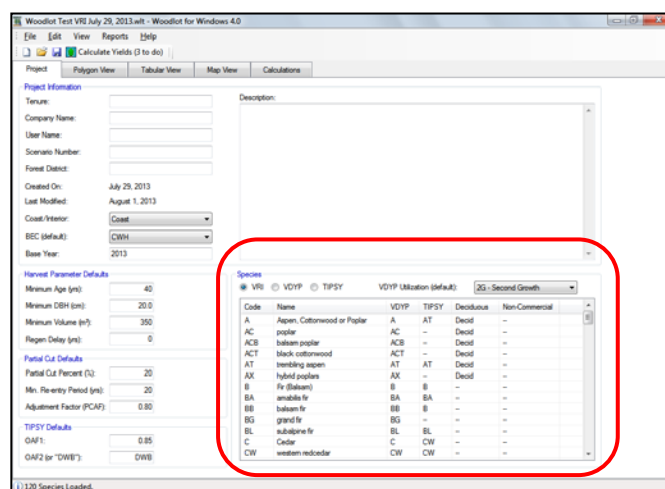

This list may be updated from time to time; therefore, please refer to the Species section of the Project tab for the latest listing of species.

Note: To copy the species list, navigate to the Edit menu and select Copy Species. This will copy the table listed in the Species window. Refer also to Section 6.6 Tree Species.

Table 5-1 VRI Tree Species Codes

Code	Name	VDYP	TIPSy	Deciduous	Non-Commercial
A	Aspen, Cottonwood or Poplar	A	AT	Decid	--
AC	poplar	AC	--	Decid	--
ACB	balsam poplar	ACB	--	Decid	--
ACT	black cottonwood	ACT	--	Decid	--
AT	trembling aspen	AT	AT	Decid	--
AX	hybrid poplars	AX	--	Decid	--
B	Fir (Balsam)	B	B	--	--
BA	amabilis fir	BA	BA	--	--
BB	balsam fir	BB	B	--	--
BG	grand fir	BG	--	--	--
BL	subalpine fir	BL	BL	--	--
C	Cedar	C	CW	--	--
CW	western redcedar	CW	CW	--	--
D	Alder	D	DR	Decid	--
DR	red alder	DR	DR	Decid	--
E	Birch	E	--	Decid	--
EA	Alaska paper birch	EA	--	Decid	--
EE	European Birch	EE	--	Decid	NC
EP	paper birch	EP	--	Decid	--
ES	silver birch	ES	--	Decid	--



EW	water birch	EW	--	Decid	NC
EXP	Alaska x paper birch hybrid	EXP	--	Decid	NC
EY	Yellow Birch	--	--	Decid	NC
F	Douglas-fir	F	FD	--	--
FD	Douglas-fir	FD	FD	--	--
FDC	coastal Douglas-fir	FDC	FDC	--	--
FDI	interior Douglas-fir	FDI	FDI	--	--
G	Dogwood	G	--	Decid	NC
GP	Pacific dogwood	GP	--	Decid	NC
H	Hemlock	H	H	--	--
HM	mountain hemlock	HM	HM	--	--
HW	western hemlock	HW	HW	--	--
HXM	mountain x western hemlock hybrid	HXM	HM	--	--
J	Juniper	J	--	Decid	NC
JR	Rocky Mtn. juniper	JR	--	Decid	NC
JS	Seaside Juniper	--	--	Decid	NC
K	Cascara	K	--	Decid	NC
KC	cascara	KC	--	Decid	NC
L	Larch	L	L	--	--
LA	alpine larch	LA	--	--	--
LD	Dahurian larch	--	--	--	NC
LS	Siberian larch	--	--	--	NC
LT	tamarack	LT	L	--	--
LW	western larch	LW	LW	--	--
M	Maple	M	--	Decid	--
MB	bigleaf maple	MB	--	Decid	--
MV	vine maple	MV	--	Decid	NC
P	Pine	P	PL	--	--
PA	whitebark pine	PA	PL	--	--
PF	limber pine	PF	PL	--	--
PJ	jack pine	PJ	PL	--	--
PL	lodgepole pine	PL	PL	--	--
PLC	shore pine	PLC	PL	--	NC
PLI	lodgepole pine	PLI	PL	--	--
PR	red pine	PR	--	--	--
PW	western white pine	PW	PW	--	--
PXJ	lodgepole x jack pine hybrid	PXJ	--	--	--
PY	ponderosa pine	PY	PY	--	--
Q	Oak	Q	--	Decid	NC
QG	Garry oak	QG	--	Decid	NC
S	Spruce	S	S	--	--
SB	black spruce	SB	--	--	--
SE	Engelmann spruce	SE	SE	--	--
SS	Sitka spruce	SS	SS	--	--
SW	white spruce	SW	SW	--	--
SX	spruce hybrid	SX	S	--	--
SXL	Sitka x white	SXL	S	--	--
SXS	Sitka x unknown hybrid	SXS	S	--	--
SXW	Engelmann x white	SXW	S	--	--
T	Yew	T	--	Decid	NC
TW	western yew	TW	--	Decid	NC
UP	Pacific crab apple	UP	--	Decid	NC
V	Cherry	V	--	Decid	NC
VB	bitter cherry	VB	--	Decid	NC
VP	pin cherry	VP	--	Decid	NC
W	Willow	W	--	Decid	NC
WA	peachleaf willow	WA	--	Decid	NC
WB	Bebb's willow	WB	--	Decid	NC
WD	pussy willow	WD	--	Decid	NC



WS	Scouler's willow	WS	--	Decid	NC
WT	Sitka willow	WT	--	Decid	NC
Y	Cypress	Y	YC	--	--
YC	yellow-cedar	YC	YC	--	--
X	unknown	X	--	--	--
XC	unknown conifer	XC	--	--	--
XH	unknown hardwood	XH	--	Decid	--
Z	other tree, not on list	Z	--	--	NC
ZC	other conifer	ZC	--	--	--
ZH	other hardwood	ZH	--	Decid	NC
RA	Arbutus menziesii	RA	--	Decid	NC
AD	southern cottonwood	AD	--	Decid	NC
BC	white fir	BC	BA	--	--
BM	Shasta red fir	BM	--	--	NC
BP	noble fir	BP	--	--	--
ME	box elder	ME	--	Decid	NC
MN	Norway maple	MN	--	Decid	NC
MS	Sycamore maple	MS	--	Decid	NC
QE	English oak	QE	--	Decid	NC
QW	white oak	--	--	Decid	NC
UA	apple	UA	--	Decid	NC
VS	sweet cherry	VS	--	Decid	NC
YP	Port Orford-cedar	YP	--	--	NC
OA	incense-cedar	OA	--	--	NC
OB	giant sequoia	OB	--	--	--
OC	coast redwood	OC	--	--	--
OD	European mountain-ash	OD	--	Decid	NC
OE	Siberian elm	OE	--	Decid	NC
OF	common pear	OF	--	Decid	NC
OG	Oregon ash	OG	--	Decid	NC
OH	white ash	--	--	Decid	NC
OI	shagbark hickory	--	--	Decid	NC
OJ	Tree-of-heaven	--	--	Decid	NC
OK	Japanese Walnut	--	--	Decid	NC
PM	Monterey pine	PM	--	Decid	NC
PS	sugar pine	PS	--	Decid	NC
SN	Norway spruce	SN	--	Decid	NC
R	Arbutus	R	--	Decid	NC
U	Apple	U	--	Decid	NC
VV	choke cherry	VV	--	Decid	NC
WP	Pacific willow	WP	--	Decid	NC

Table 5-1 References:

VDYP species and utilization levels were assembled in consultation with Dave Waddell, Modeling Forester, Strategic Initiatives Section, Forest Analysis and Inventory Branch, FLNROD and Sam Otukol, Team Lead Statistical & Biometrics Support, Forest Analysis and Inventory Branch, FLNROD, February to July, 2013

TIPSY species were assembled based on the latest version of batch TIPSY, July 2013.

VRI Relational Data Dictionary version 4.0 (draft), pp 73-75, Ministry of Forests, Lands and Natural Resource Operations, December 12, 2012.

A Users Guide to the Vegetation Resources Inventory VRI Attribute Codes, Appendix 3, Timberline Forest Inventory Consultants Ltd. (Michael Sandvoss, Bruce McClymont, Craig Farnden) March 31, 2005.



Appendix 5 Import/Export Variables used in Woodlot 4

The following variables are used in Woodlot 4 CSV files or when viewing data in Tabular view, for importing data into Woodlot or for exporting data from Woodlot. Refer also to Appendix 8 for a list of VRI variables used in Woodlot 4.

Note that the use of [] square brackets denote that:

- (a) for importing data to Woodlot, the variable is to use default values generated by Woodlot, or,
- (b) for exported files, the value in square brackets was generated from defaults generated by Woodlot and used in your analysis.

Note that the Woodlot 4 variables are also listed in the “columns” in the column filter in the Tabular View tab.

Woodlot Variable	Description of variable to use	Woodlot Default Value can be generated	Available in VRI data	Acceptable codes	Example
UniqueID	An optional field of unique polygon identifiers, used if your polygon mapsheet numbers have duplicates to distinguish between them.			Text or number	MG1
Mapsheet	Mapsheet number.		Y	Text or number	092C095
Polygon	Polygon number.		Y	Text or number	111
SubPolygon	Split polygon identifier name or number.			Text or number	a
Delete	Polygon will be imported but not displayed in Woodlot.			0=yes, 1=no	0
FMLB	Forest Management Land Base classifier.			Yes, No (reason)	No (Rock)
Ownership	Land ownership classifier. You can use Woodlot terms or your own custom classification terms.			Crown, Private, Top-Up, Other	Crown
AreaGross	Gross area in hectares. Accepts 0-4 decimals.		Y	Number	20
AreaEx	Percent of area excluded.			%	100.00%
AreaExDesc	Description of area excluded.			Text	Rock
AreaRoads	Area of road to be reduced, in ha or % of polygon.			Number or percentage	0.4 or 2.0%
AreaNet	Calculated net area after exclusions and reductions. Enter [] square brackets to have the net area calculated by Woodlot by default. Accepts 0-4 decimals.	Y		Number	[20.0]



BEC	Biogeoclimatic Ecological Classification Zone (BEC Zone).		Y	Valid BEC Zone text	CWH
BECLong	BEC Zone, subzone and variant		Y	Valid BEC Zone text	CWH_vh_1
YearEstab	Year of establishment.		Y	Number	1951
CurAge	Current age of the polygon, years from establishment year. Current age is related to establishment year, so if you import a VRI file, this age may be updated in Woodlot to your current year.		Y	Number	62
Comments	Used to provide comments in the Polygon View tab for each polygon.			Text (with rows delimited by the pipe symbol)	This polygon was updated with new Site Index.
LabelOverride	Used to provide text to override the polygon map label.			Text (with rows delimited by the pipe symbol)	Blk 15 Logged 2010
SiteIndex	Site index at breast height age 50, meters.		Y	Number	20
SISpecies	Site index species used to calculate site index in the Calculate Site Index feature on the Polygon View tab.		Y	Text	Fd
SIAgeBH	Breast height age used to calculate site index in the Calculate Site Index feature on the Polygon View tab. Used only if total age is not used.			Number	15
SIAgeT	Total age used to calculate site index in the Calculate Site Index feature on the Polygon View tab. Used only if a breast height age is not used.			Number	65
SIHeight	Height used to calculate site index in the Calculate Site Index feature on the Polygon View tab.			Number	22
HarvestAge	Age at which harvest parameters are met or the age at which you want to harvest, years.	Y		Number	61
c_...	Classifier. The field header is described by c_ and followed by the classifier name; for example c_VQO would create a classifier for VQO. Populate data in this column with the VQOs for each polygon.			Text	Partial Retention
Silvi	Silviculture System to use.			"none", "CC-NoChange", "CC-Reforest", "PC"	CC-NoChange



PCPerc	Partial Cut % removal on the first entry.			%	20%
PCNext	Partial Cut number of years until re-entry.			Number	25
PCMeth	Choice of partial cut method. (Multiage is not currently available.)			A=average age (M=multiage for a future feature)	A
NoHarvReas	User defined reason for not harvesting.			Text or number	Crappy stand
RegenDelay	Regeneration delay in years.			Number	2
SiteIndex2	Future forest site index in m (at breast height age 50), for the second rotation. Type in your site index, or use -1 or 0 to bring in original site index.			Number	21.4
HarvestAg2	Harvest age in years for the second rotation.			Number	95
YieldName2	"Reforest to" yield name.			Text	HighsiteFD
YieldMeth	Yield method - VDYP, TIPSy, NC, NSR, TASS, Custom.			Text	VDYP
SpCd1	Species code - 1st species. Use VRI species codes.		Y	Text	HW
SpCd2	Species code - 2nd species. Use VRI species codes.		Y	Text	CW
SpCd3	Species code - 3rd species. Use VRI species codes.		Y	Text	SS
SpCd4	Species code - 4th species. Use VRI species codes.		Y	Text	FD
SpCd5	Species code - 5th species. Use VRI species codes.		Y	Text	YC
SpCd6	Species code - 6th species. Use VRI species codes.		Y	Text	DR
SpPt1	Species percent - 1st species.		Y	%	40
SpPt2	Species percent - 2nd species.		Y	%	20
SpPt3	Species percent - 3rd species.		Y	%	15
SpPt4	Species percent - 4th species.		Y	%	10
SpPt5	Species percent - 5th species.		Y	%	10
SpPt6	Species percent - 6th species.		Y	%	5
SpIn1	Whether species1 will be included and available for harvest (ie, not excluded).			Y or N	Y
SpIn2	Whether species2 will be included and available for harvest (ie, not excluded).			Y or N	Y
SpIn3	Whether species3 will be included and available for harvest (ie, not excluded).			Y or N	Y



SpIn4	Whether species4 will be included and available for harvest (ie, not excluded).			Y or N	Y
SpIn5	Whether species5 will be included and available for harvest (ie, not excluded).			Y or N	Y
SpIn6	Whether species6 will be included and available for harvest (i.e., not excluded).			Y or N	Y
GenWorth	Genetic worth, yes to activate it or no to not activate it.			Y or N	N
SpWG1	Genetic worth by species in %.			%	5.8
SpWG2	Genetic worth by species in %.			%	5.8
SpWG3	Genetic worth by species in %.			%	5.8
SpWG4	Genetic worth by species in %.			%	5.8
SpWG5	Genetic worth by species in %.			%	5.8
SpWG6	Genetic worth by species in %.			%	5.8
MinCutAge	Minimum harvest age for harvest parameters. Enter [] to use Woodlot defaults or enter your own minimum parameter.	Y		Number	[]
MinCutDBH	Minimum dbh for harvest parameters. Enter [] to use Woodlot defaults or enter your own minimum parameter.	Y		Number	[]
MinCutVol	Minimum volume/ha for harvest parameters. Enter [] to use Woodlot defaults or enter your own minimum parameter.	Y		Number	[]
VAF	Volume adjustment factor for VDYP yields, from 0-1.0 (95% = 0.95)			0.0 to 1.0	0.95
RefStemsHa	Number of stems per ha at reference year, for use in VDYP7 Console.		Y	Number	1235
RefBasalA	Basal area m ² per hectare at reference year, for use in VDYP7 Console.		Y	Number	52.6
RefAge	Age at reference year, for use in VDYP7 Console.		Y	Number	34
RefHeight	Height in meters at reference year, for use in VDYP7 Console. Enter [] to use Woodlot defaults or enter your own reference height.	Y	Y	Number	[]
RefDate	Reference date, in day/month/year.		Y	Date	21/07/1987
UtilizFile	Utilization level - OG, 2G, HG, 12.5, 17.5.			Text or number	OG
Closure	Crown Closure.		Y	%	60



StockClass	Stocking Class - 0, 1, 2, etc per VRI specs.		Y	Number	1
OAF1	Operational Adjustment Factor 1. 15% = 0.85	Y		%	0.85
OAF2	Operational Adjustment Factor 2.	Y		Text or %	0.95
Regen	Regeneration method - Natural, Planted, Clumped.			Text - N, P or C	N
Density	Stems per hectare at establishment, for use in TIPSy.			Number	1600
Thin	Whether to pre-commercial thin or not.			Y or N	Y
Thinned	Thin to density in stems per hectare, for use in TIPSy.			Number	1200
ComThin	Whether to Commercial thin or not. Can only be used with Fd on the coast and Pl in the Interior. Refer to TIPSy Help for more info.			Y or N	Y
CTStemha	Commercial thin-to density in stems per hectare, for use in TIPSy.			Number	600
CTHeight	Commercial thin-to height in metres, for use in TIPSy.			Number	25.3
Fert	Whether to fertilize or not.			Y or N	Y
FertAge	Age of fertilization in years.			Number	55
NSRRestock	Number of years when to restock a NSR polygon.			Number	4
NCHarvIn	Number of years when to harvest a NC polygon.			Number	12
NCVolHa	Merchantable Volume m ³ /ha of the NC stand.			Number	120
NCD decid	% of the NC stand that is deciduous.			%	60
NCHHeight	Height in meters of the NC stand.			Number	15.6
NCDesc	Descriptor of the NC stand.			Text	N
FIPstart	Whether to activate FIPstart if data is available. Generally leave this as "Y".			Y or N	Y
Notes for Woodlot 4 variables:					
[] Square brackets	Indicates that the value has been generated from the defaults used in Woodlot. Woodlot will generate default numbers and use these unless you over-ride them. To over-ride default values being generated and used, enter your own data in the cell.			[]	use [] to activate default values
Default parameters	Some default parameters on the Project tab can be entered in your CSV file.				



Region	Region is manually entered into the Project Tab.			Region	Coast or Interior
Yes or No convention	If the first character is Y, 1, or T then the result is true, otherwise it is false. Alternately, use N, 0, or F to enter No				Y, 1, T or N, 0, F
Classifiers - C_name	Any column with a "C_" followed by a name, will become a classifier. Usually these are added to the end of the CSV file.			C_ (<i>text descriptor</i>)	C_VQO



Appendix 6 Some Basic Steps to Use Woodlot 4

Getting Acquainted

We suggest you acquaint yourself with the features of Woodlot 4 before running your first harvest rate calculation. Refer to Section 4.1 and 4.2 for a description of the main functional areas in Woodlot 4.

Use the following steps to guide you through a test application. Woodlot 4 uses most features common to Windows based applications. All functions are activated by “pointing and clicking” on screen buttons with a mouse. Polygon data (forest inventory information for each forest polygon) is entered either manually on the screens or by loading in polygon data input files. Parameters and constraints are changed on screen as you work.

Sample steps:

1. Load up Woodlot 4 by double clicking on the Woodlot icon, or activate it by navigating to Start, then Programs, then Woodlot 4. The About screen will appear, and then will leave within a few seconds automatically. The Project screen with the five main tabs will appear.
2. Load up a sample woodlot file located in C:\Program Files (x86)\Woodlot for Windows 4\Sample. Click on your sample woodlot file. The filename will appear at the top of the screen once it is loaded in.
3. Click through the five main tabs to view the data that has been entered, and the results of the last calculation.
4. Click on the Project tab and ensure the default information is correct for your woodlot. Make sure you have entered whether you are Coast or Interior and your BEC zone, these are new defaults you will need.
5. To check forest polygon data and yield information, click open the Polygon View tab. You will see all the data for each individual polygon in the list box required to determine the yields. Click through several polygons to see information pertaining to each polygon.
6. To update your yields, click on <Edit><Remove all imported .LOT Yields>. Then on the menu bar, click on <Calculate Yields>.
7. The VDYP and TIPSYS calculations will start, and a black DOS screen will appear. Allow several seconds for it to compile the VDYP and TIPSYS yields. The resulting yield information will be loaded into Woodlot automatically, and you will be returned to the Polygon View tab.
8. To view timber yield information for any polygon, in the Polygon View tab, click on the polygon number in the navigation tree, then click on the yield type screen, usually for VDYP or for TIPSYS. This will open a Yield Settings window with the polygon data for that yield type. Click on the <Cancel> button at the bottom right to close this screen. Click on the mini-graph to display the yield table. Click on the Plot Yield icon at the top to view the yield curves. Close out the windows by clicking the red X.



9. To view a summary of basic yield information for all your forest polygons, open the Tabular View tab. This will display a listing of polygons and harvest information.
10. To run a calculation, open the Calculations tab.
11. Forest polygons are listed in a small display box called Harvest Order. That order is set based on the Harvest Priority displayed above. By default, Woodlot 4 will set the Harvest Order to the same as in your last *.lot file. The calculation will assume that the order for harvest is the order listed here.
12. If you want to reset the harvest order, you will need to unselect the Woodlot 3 Sort Order check box. Clicking on a polygon and using the buttons titled <First>, <Up>, <Down>, <Next> and <None> can change this order.
13. Or, the order can be automatically sorted by clicking on the Harvest Priority menu items above.
14. To run a calculation, click on the <Calculate> button in the lower portion of the screen and allow a few seconds. The model will calculate a non-declining even flow harvest rate for the polygons in the order selected, using yield information derived in Polygon Data.
15. The Standing Time/Volume Graph and summary harvest schedule will update. The graph displays the available timber volume over a 250-year horizon. In the graph, dark green colours indicate volume that has reached harvest age; light green colours indicate volume younger than harvest age. A tan coloured line on the bottom denotes volume that is not contributing to the harvest rate, but which is used to meet forest cover constraints along with merchantable timber. The top green line denotes the total volume at every year. A line that increases over time indicates that volume is being grown faster than it is being harvested.
16. Try a few revisions to test the impact of increasing the harvest rate. Click off the check box in the lower left corner titled <Auto-Harvest Rate>, enter a higher harvest rate than calculated, say 50% higher in the next box, and click on <Calculate>. Notice the graph; the blue vertical lines represent periods when no timber is available to harvest.
17. Activate the <Constraints> feature by clicking on their check boxes, and then <Calculate>. The red vertical lines represent periods when age constraints could not be met, or when height constraints could not be met. In these latter cases, timber is available for harvest, but these constraints will not be met.
18. To determine the harvest that will meet all constraints, click on <Auto-Harvest Rate> and then <Calculate>.
19. Save your work and then return to any tab to view data, or remain in the Calculations tab.
20. To review the report that can be generated, first ensure you have run a calculation, and then click on the Report menu and the Woodlot Report menu item. The report will be displayed for you. If you want to view, modify, or print the report, you can do so here. Save your report as a doc file.
21. To review the graphs that can be generated, first ensure you have run a calculation, and then click on the Report menu. Choose one of the graphs to activate Plotsy and generate the graph for your use. The graph will be displayed for you. Export the graph as a *.gif file for later use in a document if you wish.



22. To save your woodlot analysis work for another time, navigate to the File menu and click on <SaveAs>. Enter your filename and save your file. This will create a new *.wlt file for use next time.
23. You can return to any one of ten last files used by selecting the file you wish from the list provided under <File> <Recent>.

Key Features of Woodlot

The following are some key pointers about how Woodlot works, which is described in detail in the User Guide:

1. Forest Polygons Woodlot uses the data for individual forest cover “polygons” in all calculations. A polygon is denoted on a FLNROD forest cover map by dashed lines, and typically ranges in size from 0.5 ha to 100 ha. Each polygon has a reference number and forest cover code, which is referenced back to a database describing its attributes (e.g. F(PI) 841-20).

You enter this data either manually or using a data entry file (CSV file) in the **Polygon View** tab.

There are no limits to the number of polygons or area size that may be analyzed in Woodlot 4.

2. Timber Yields The volume of timber is derived from either of two yield estimation models developed by FLNROD:
 - Variable Density Yield Projection (VDYP) 7
 - The Table Interpolation Program for Stand Yields (TIPSY) 4.3

The volume predicted can be adjusted to match local conditions. Timber yields are calculated in the **Polygon View** tab.

You may review the timber yield information (table and graphical) in the **Polygon View** tab by clicking the Yield Type or the mini-yield curve.

3. Silviculture Systems You have two choices for silviculture systems:
 - Clearcut, which assumes 100% removal in the first pass.
 - Partial Cut, which assumes a portion is removed in the first pass, and you return for periodic removals of ingrowth over time.

These are selected in the **Polygon View** tab.



4. Harvest Ages

A preliminary harvest age is selected by Woodlot 4 for you based on the older of the culmination age (the age at which the trees are growing their fastest, on average), or the age at which the minimum harvest parameters are met. Harvest ages that have been selected by Woodlot 4 are denoted with square brackets around them (e.g. [120] means that Woodlot selected a harvest age of 120 yrs since it has met both minimum harvest parameters and the culmination age.

You may adjust this age yourself by typing over it.
5. Harvest Parameters

You can select the minimum harvest age, minimum volume per hectare, minimum diameter and minimum harvest age limits. These establish the earliest possible age when a polygon may be harvested. These are set globally for your woodlot in the **Project** tab.
6. Harvest Order

You select the order in which to harvest your woodlot. You can use features in the **Calculation** screen to adjust the harvest order and harvest priority.
7. Constraints

You can set spatial and temporal constraints to simulate the requirements for retaining a specified proportion of your woodlot in certain age or height characteristics; for example, to ensure that you retain enough area of old growth or winter range.
8. Planning Period and Sustainable Harvest Rate


The planning period is 250 years. The sustainable harvest rate is calculated for a continuous harvest flow over this period (flat line or non-declining even flow) as required by Ministry of Forests, Lands and Natural Resource Operations' policy.



How Woodlot Calculates the Harvest Rate

Once you have entered your forest polygons, calculated their timber yields, entered assumptions and constraints, and established a harvest order, an iterative calculation process is used by Woodlot to arrive at a sustainable harvest rate. This iterative process simulates the operational harvest on a woodlot by placing priority on the harvest order you select in the first pass; on the second and subsequent passes, it chooses the most harvestable stand that meets your harvesting criteria.

Woodlot starts with an initial harvest rate selected by the program (this value could be any number but Woodlot uses a set rate to streamline the process), then cycles through harvest calculations, adjusting it up or down until it reaches a sustainable harvest rate as noted below. If the harvest cannot be sustained, the rate is decreased; if it completes, the harvest rate is increased. The amount of change is relative to the initial harvest calculation, and then is decreased or increased until a rate is met within 1 m³.

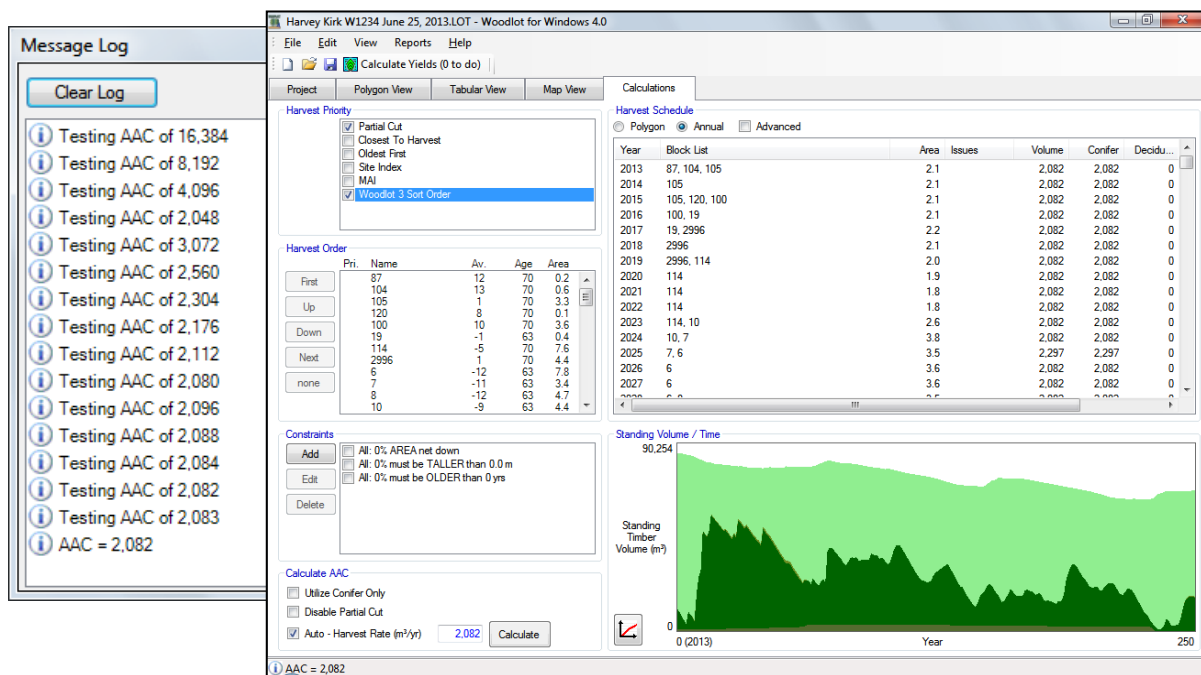

Woodlot chooses a polygon to harvest in order of importance as follows:

- A. On the first rotation:
 1. Harvesting occurs in the order displayed in the Harvest Order.
 2. Polygons that are not ready to harvest (too young) will be put in a queue until they meet minimum harvest age criteria that you have set, then will be harvested at the first opportunity, and prior to other uncut polygons in the original sort order.
- B. On subsequent rotations:
 1. Partial cut polygons will always be re-harvested first as soon as they meet their re-entry requirements.
 2. Woodlot will re-harvest clearcut polygons as soon as they reach their desired harvest ages.



Summary of Basic Steps to Use Woodlot

The following basic steps are used to calculate a harvest rate in Woodlot:

1. Start up Woodlot
Double clicking the icon or select from the Start/Programs selection pick. The **About** screen will appear briefly, and the **Project** tab will appear.
2. Start a new project or open an existing project file.
To start a new project, click on File New. Once you create a *.wlt file, you may reuse and update this file whenever you wish. To use an existing project file, simply load up the file from the File menu, use File Open.
3. Project Information
Enter your basic project information and default forest information in the **Project** tab.
4. Inventory Information
Enter your timber inventory data in the **Polygon View** tab.
5. Timber Management Assumptions
Enter your timber management assumptions (silviculture system, planting, fertilization, genetic gain, etc.) in the **Polygon View** tab. Set or adjust harvest ages in the **Polygon View** tab (once the yields have been compiled.)
6. Timber Yields
Calculate the timber yield information for the woodlot using the Calculate Yields menu item from any tab view.
7. Summary information
Check over your data in the **Tabular View** tab and adjust some variables if you wish.
8. Harvest (AAC) Calculations
Set your harvest order and timber management constraints in the **Calculations** tab. Run your harvest calculations in the **Calculations** tab (click Calculate button.)
9. Check your results.
Use your judgment to determine if the answer seems logical and workable for your woodlot. *As a rule of thumb, the harvest rate should be in the order of the (net area)*(average mai) for clearcut harvest operations.*

Test the harvest rate and sensitivity of assumptions by running a few alternate scenarios in the **Calculations** Screen.
10. Report
Generate a report and graphs from the Report menu. Edit and print as required. Any assumptions or explanations of how variables were selected must be included in the report to the district manager.
11. Save your work and exit from Woodlot
From the File menu, click Save and then Exit. Don't forget to save your project file!



Some Woodlot for Windows Tips and Tricks

Every user has their preferred way to add, edit, and massage data for a Woodlot for Windows analysis. Two suggested ways are as follows. If you are not familiar with working with timber supply datasets, you may want to talk with a woodlot forester, tech, or GIS specialist.

If you feel comfortable working with the data, the logical way to carry out a multi-polygon edit to information in Woodlot is to:

- 1) export to CSV,
- 2) load the CSV into Excel or software of your choice,
- 3) edit CSV / data using logic-based selection abilities and/or copy functions,
- 4) import edited info in CSV back to Woodlot using Import CSV - Update Poly function.

VRI data files

Please note that users should not edit or delete information from the VRI data file unless you know what you are doing, as this could corrupt the woodlot file and create unexpected results. Some less-obvious fields in the VRI file is used by VDYP7. Users are cautioned to consult with the Ministry Inventory staff for more information on fields in the VRI file that affect VDYP7 performance.



Appendix 7 Sample Woodlot report

Woodlot Licence Harvest Planning report

Date:	April 24, 2019 - 11:27 AM
Woodlot File:	wl44manual2019.wlt
Harvest Rate:	1,231 m ³ /year
Tenure:	W2014
Company Name:	WL4.1 Forest Management Ltd.
User Name:	Harvey Kirk
Scenario Number:	1
Forest District:	Nadina

Model Information

Woodlot Version:	Release 4.4.0.0 (April 30, 2019)
VDYP Version:	VDYP7Console 7.14b: 7, 14, 2, 61
TIPSY Version:	BatchTIPSY: 4, 4, 2, 0
Sindex Version:	Sindex: 1.52

Summary

Total Area:	633.0 ha
Net Area:	633.0 ha
THLB Area:	547.9 ha
LRSY:	1,835 m ³ /year
Existing Forest cMAI:	0.72 m ³ /ha/year

Woodlot Settings

Coast/Interior:	Interior
Default VDYP Utilization:	12.5 - All Species 12.5
Default BEC:	SBS
Minimum Harvest Age:	40 years
Minimum Harvest Diameter:	20 cm
Minimum Harvest Vol/ha:	150 m ³ /ha
Default TIPSY OAF1:	0.85
Default TIPSY OAF2:	0.95
P.C. Adjustment Factor:	0.80
P.C. Minimum Vol/Ha:	50 m ³ /ha
Planning Horizon:	250 years
Base Year:	2014

Project Description:

1.0 Introduction

This section summarises information used to calculate a long term harvest rate on Woodlot Licence No. W2014. The calculated harvest rate can be used to assist in determining the allowable annual cut (AAC). It should be assessed in light of the assumptions used, social and economic considerations in determining the AAC.



2.0 Summary

a) Area Summary

Description	Area (ha)	Area (ha)	Volume (m³)	Polygons (#)
Total Area		633.0		151
- Non Forest		0.0		0
- Non FMLB (Lake)	0.0			0
- Non FMLB (Swamp)	0.0			0
- Non FMLB (Open Range)	0.0			0
- Non FMLB (Cultivated)	0.0			0
- Non FMLB (VRI)	0.0			0
= FMLB (forest management landbase)		633.0	65,071.0	151
- Reduction	0.0			0
- Future Roads	0.0			0
= Net Area		633.0	65,071.0	151
- Excluded (Constraints)		0.0		0
= Contributing Forest		633.0	65,071.0	151
- Missing yield data	0.0			0
- Area Net down (constraint)	0.0			0
- Minimum Parameters Not met	48.9		2,981.0	20
- Silviculture System - Do Not Harvest	36.3			13
= THLB (timber harvesting landbase)		547.9	62,090.0	118

b) Polygon Data

Polygon	Gross Area (ha)	Net Area (ha)	Age (yrs)	FC Label	Vol/ha (m³/ha)	Gross Volume (m³)	Net Volume (m³)	Ownership	FC_RES	Silviculture
093E088 2622	[1.8829]	[1.8829]	119	V SwPIAt 15.1	216.0	406.7	406.7	Crown	- none -	CC-NoChange
093E088 2620	[1.2662]	[1.2662]	129	V PISw 19.1	360.2	456.1	456.1	Crown	- none -	CC-NoChange
093E088 96809345	[5.7745]	[5.7745]	129	V SwPIBI 14.6	87.7	506.4	506.4	Crown	- none -	CC-NoChange
093E088 2621	[4.064]	[4.064]	89	V At(PISw) 16.9	80.2	325.9	325.9	Crown	- none -	CC-NoChange
093E088 98799377	[2.9039]	[2.9039]	129	Non Commercial	125.3	363.9	363.9	Crown	- none -	CC-Reforest
093E088 2617	[5.865]	[5.865]	89	V PISw(At) 16.6	216.2	1,268.0	1,268.0	Crown	- none -	CC-NoChange
093E088 2623	[1.367]	[1.367]	119	V SwBI 10.8	17.7	24.2	24.2	Crown	- none -	CC-NoChange
093E088 2696	[4.3752]	[4.3752]	88	Non Commercial	38.5	168.4	168.4	Crown	- none -	CC-Reforest
093E088 2678	[0.3579]	[0.3579]	99	V Sw(AcPI) 17.7	215.5	77.1	77.1	Crown	- none -	CC-NoChange
093E088 2699	[6.6515]	[6.6515]	99	V PIAtSw(BI) 18.1	70.2	466.9	466.9	Crown	- none -	CC-NoChange
093E088 2634	[1.3355]	[1.3355]	79	V SwAt 18.3	34.7	46.3	46.3	Crown	- none -	CC-NoChange
093E088 2673	[5.0553]	[5.0553]	129	Non Commercial	105.0	530.8	530.8	Crown	- none -	CC-Reforest
093E088 2673	[2.4031]	[2.4031]	129	Non Commercial	105.0	252.3	252.3	Crown	WTR	CC-Reforest
093E088 2657	[3.282]	[3.282]	129	Non Commercial	162.7	534.0	534.0	Crown	- none -	CC-Reforest
093E088 2711	[2.444]	[2.444]	23	V PI 18.0	1.3	3.2	3.2	Crown	- none -	CC-NoChange
093E089 356	[5.3449]	[5.3449]	155	V SwPI 14.0	338.1	1,807.1	1,807.1	Crown	- none -	CC-NoChange
093E088 15198806	[0.0042]	[0.0042]	79	V AtAcSw(PI) 15.7	25.4	0.1	0.1	Crown	- none -	CC-NoChange
093E088 1199394	[3.0301]	[3.0301]	119	V SwPIBI 15.1	131.8	399.4	399.4	Crown	- none -	CC-NoChange
093E088 10438714	[3.7562]	[3.7562]	159	Non Commercial	128.1	481.2	481.2	Crown	- none -	CC-Reforest
093E088 12098976	[12.7303]	[12.7303]	129	Non Commercial	72.0	916.6	916.6	Crown	- none -	CC-Reforest
093E088 12259548	[3.9578]	[3.9578]	94	V AtPISw 15.3	135.5	536.3	536.3	Crown	- none -	CC-NoChange
093E088 6848733	[1.2371]	[1.2371]	215	Non Commercial	4.0	4.9	4.9	Crown	- none -	CC-Reforest
093E088 4479476	[0.8726]	[0.8726]	n/a	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 11009130	[5.7707]	[5.7707]	109	Non Commercial	62.6	361.2	361.2	Crown	- none -	CC-Reforest
093E088 11789038	[5.8795]	[5.8795]	199	Non Commercial	91.1	535.6	535.6	Crown	- none -	CC-Reforest
093E088 3179368	[24.1627]	[24.1627]	139	Non Commercial	136.9	3,307.9	3,307.9	Crown	- none -	CC-Reforest
093E088 2690	[10.032]	[10.032]	119	Non Commercial	74.7	749.4	749.4	Crown	- none -	CC-Reforest
093E088 2627	[7.1783]	[7.1783]	89	V PIBI(Sw) 17.1	398.8	2,862.7	2,862.7	Crown	- none -	CC-NoChange
093E088 2635	[1.9533]	[1.9533]	79	V AtPISw 16.7	114.5	223.7	223.7	Crown	- none -	CC-NoChange
093E088 2709	[5.6818]	[5.6818]	129	V PI 18.2	392.6	2,230.7	2,230.7	Crown	- none -	CC-NoChange
093E088 2709	[0.1527]	[0.1527]	129	V PI 18.2	392.6	60.0	60.0	Crown	WTR	CC-NoChange
093E088 2665	[1.2784]	[1.2784]	119	V SwPI 15.1	141.4	180.8	180.8	Crown	- none -	CC-NoChange
093E088 2708	[0.0462]	[0.0462]	24	V PI 18.0	5.1	0.2	0.2	Crown	- none -	CC-NoChange
093E088 2708	[6.2285]	[6.2285]	24	V PI 18.0	5.1	31.8	31.8	Crown	WTR	CC-NoChange
093E088 2662	[1.4216]	[1.4216]	129	Non Commercial	42.8	60.8	60.8	Crown	- none -	CC-Reforest
093E088 2662	[0.8829]	[0.8829]	129	Non Commercial	42.8	37.8	37.8	Crown	WTR	CC-Reforest
093E088 9439593	[9.3209]	[9.3209]	225	Non Commercial	24.4	227.4	227.4	Crown	- none -	CC-Reforest
093E088 4608394	[3.2187]	[3.2187]	119	Non Commercial	16.6	53.4	53.4	Crown	- none -	CC-Reforest
093E088 5438586	[2.1997]	[2.1997]	8	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 13389235	[14.8085]	[14.8085]	97	Non Commercial	47.4	701.9	701.9	Crown	- none -	CC-Reforest
093E088 5679662	[1.0998]	[1.0998]	n/a	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 5979595	[4.1197]	[4.1197]	79	V PISw 16.3	240.4	990.4	990.4	Crown	- none -	CC-NoChange
093E088 2684	[5.5842]	[5.5842]	125	Non Commercial	149.7	836.0	836.0	Crown	- none -	CC-Reforest
093E088 553	[0.0072]	[0.0072]	98	V PI 11.7	113.4	0.8	0.8	Crown	- none -	CC-NoChange
093E088 2644	[4.432]	[4.432]	89	Non Commercial	142.6	632.0	632.0	Crown	- none -	CC-Reforest
093E088 2625	[2.4229]	[2.4229]	89	V SwPI 16.4	212.2	514.1	514.1	Crown	- none -	CC-Reforest
093E088 2625	[0.06]	[0.06]	89	V SwPI 16.4	212.2	12.7	12.7	Crown	WTR	CC-Reforest
093E088 2685	[2.1896]	[2.1896]	119	Non Commercial	128.1	280.5	280.5	Crown	- none -	CC-Reforest
093E088 2666	[5.7709]	[5.7709]	79	V AtAcSw(PI) 15.7	25.3	146.0	146.0	Crown	- none -	CC-NoChange
093E088 2656	[3.7211]	[3.7211]	119	Non Commercial	52.1	193.9	193.9	Crown	- none -	CC-Reforest



093E088 2640	[6.3918]	[6.3918]	89	V At 16.0	49.5	316.4	316.4	Crown	- none -	CC-NoChange
093E089 366	[0.6151]	[0.6151]	155	Non Commercial	104.9	64.5	64.5	Crown	- none -	CC-Reforest
093E089 306	[43.454]	[43.454]	95	V AtSw 16.9	162.2	7,048.2	7,048.2	Crown	- none -	CC-NoChange
093E088 1859438	[3.4716]	[3.4716]	77	V BIsWPI 16.4	226.8	787.4	787.4	Crown	- none -	CC-NoChange
093E088 10189828	[4.8628]	[4.8628]	149	Non Commercial	30.5	148.3	148.3	Crown	- none -	CC-Reforest
093E088 10189828	[0.6332]	[0.6332]	149	Non Commercial	30.5	19.3	19.3	Crown	WTR	CC-Reforest
093E088 11139905	[0.0662]	[0.0662]	n/a	V 0.0	0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 11919964	[0.0051]	[0.0051]	124	Non Commercial	146.4	0.7	0.7	Crown	- none -	CC-Reforest
093E088 8529279	[32.3704]	[32.3704]	225	Non Commercial	21.6	699.2	699.2	Crown	- none -	CC-Reforest
093E088 2683	[4.3325]	[4.3325]	119	Non Commercial	49.5	214.5	214.5	Crown	- none -	CC-Reforest
093E088 2683	[1.691]	[1.691]	119	Non Commercial	49.5	83.7	83.7	Crown	WTR	CC-Reforest
093E088 2628	[6.2922]	[6.2922]	169	V SwPI 13.8	273.7	1,722.2	1,722.2	Crown	- none -	CC-NoChange
093E088 2700	[5.8775]	[5.8775]	149	V PISw 18.9	300.9	1,768.5	1,768.5	Crown	- none -	CC-NoChange
093E088 2646	[4.0844]	[4.0844]	89	Non Commercial	51.1	208.7	208.7	Crown	- none -	CC-Reforest
093E088 2712	[5.1523]	[5.1523]	23	V PI 18.0	1.3	6.7	6.7	Crown	- none -	CC-NoChange
093E088 517	[0.0001]	[0.0001]	123	V PIAt 14.6	122.3	0.0	0.0	Crown	- none -	CC-NoChange
093E088 9159693	[7.3446]	[7.3446]	89	V BIsWPI 15.3	251.5	1,847.2	1,847.2	Crown	- none -	CC-NoChange
093E088 8088734	[7.1264]	[7.1264]	215	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-Reforest
093E088 6088571	[3.7094]	[3.7094]	119	Non Commercial	62.7	232.6	232.6	Crown	- none -	CC-Reforest
093E088 14199159	[6.7744]	[6.7744]	n/a	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 7639634	[4.1376]	[4.1376]	139	V PISw(BI) 20.3	249.3	1,031.5	1,031.5	Crown	- none -	CC-NoChange
093E088 3549576	[4.0244]	[4.0244]	140	Non Commercial	96.3	387.5	387.5	Crown	- none -	CC-Reforest
093E088 5819689	[0.2633]	[0.2633]	n/a	V 0.0	0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 2676	[3.5523]	[3.5523]	129	Non Commercial	107.2	380.8	380.8	Crown	- none -	CC-Reforest
093E088 2688	[22.0157]	[22.0157]	156	Non Commercial	74.6	1,642.4	1,642.4	Crown	- none -	CC-Reforest
093E088 2655	[0.5237]	[0.5237]	119	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-Reforest
093E089 365	[3.4589]	[3.4589]	155	Non Commercial	87.3	302.0	302.0	Crown	- none -	CC-Reforest
093E088 11078818	[11.3428]	[11.3428]	6	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 8989480	[3.4025]	[3.4025]	8	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 14489107	[0.0341]	[0.0341]	n/a	V 0.0	0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 2692	[2.4776]	[2.4776]	119	V AcSw 18.9	50.3	124.6	124.6	Crown	- none -	CC-NoChange
093E088 2706	[0.1472]	[0.1472]	139	V SwPI 15.0	192.4	28.3	28.3	Crown	- none -	CC-NoChange
093E089 308	[3.2305]	[3.2305]	75	V SwAt(PI) 18.8	177.1	572.1	572.1	Crown	- none -	CC-NoChange
093E089 906	[0.3696]	[0.3696]	36	V SwPI 16.0	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E089 355	[0.4057]	[0.4057]	75	V AtPIsw 14.6	96.8	39.3	39.3	Crown	- none -	CC-NoChange
093E088 11188696	[2.1578]	[2.1578]	119	V SwPI(At) 16.7	96.0	207.1	207.1	Crown	- none -	CC-NoChange
093E088 13039949	[0.8734]	[0.8734]	130	Non Commercial	56.8	49.6	49.6	Crown	- none -	CC-Reforest
093E088 13039949	[0.2371]	[0.2371]	130	Non Commercial	56.8	13.5	13.5	Crown	WTR	CC-Reforest
093E088 7709395	[2.5115]	[2.5115]	159	V SwPI 14.6	321.0	806.2	806.2	Crown	- none -	CC-NoChange
093E088 7719537	[1.4377]	[1.4377]	89	Non Commercial	77.5	111.4	111.4	Crown	- none -	CC-Reforest
093E088 9728858	[31.4372]	[31.4372]	133	Non Commercial	63.1	1,983.7	1,983.7	Crown	- none -	CC-Reforest
093E088 9728858	[0.0225]	[0.0225]	133	Non Commercial	63.1	1.4	1.4	Crown	WTR	CC-Reforest
093E088 3298859	[1.2676]	[1.2676]	n/a	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 3808454	[3.8192]	[3.8192]	109	Non Commercial	45.5	173.8	173.8	Crown	- none -	CC-Reforest
093E088 3808454	[2.4139]	[2.4139]	109	Non Commercial	45.5	109.8	109.8	Crown	WTR	CC-Reforest
093E088 5448510	[1.0959]	[1.0959]	129	Non Commercial	67.9	74.4	74.4	Crown	- none -	CC-Reforest
093E088 6899711	[3.4893]	[3.4893]	89	V BIsWPI 15.3	254.0	886.3	886.3	Crown	- none -	CC-NoChange
093E088 2643	[1.2462]	[1.2462]	129	V PISw 19.1	359.0	447.4	447.4	Crown	- none -	CC-NoChange
093E088 2631	[2.072]	[2.072]	79	Non Commercial	93.4	193.5	193.5	Crown	- none -	CC-Reforest
093E088 2626	[2.9895]	[2.9895]	129	Non Commercial	188.0	562.0	562.0	Crown	- none -	CC-Reforest
093E088 2702	[1.749]	[1.749]	139	Non Commercial	71.0	124.2	124.2	Crown	- none -	CC-Reforest
093E088 2701	[3.7279]	[3.7279]	139	Non Commercial	34.3	127.9	127.9	Crown	- none -	CC-Reforest
093E088 512	[0.0092]	[0.0092]	138	V PI 12.9	232.4	2.1	2.1	Crown	- none -	CC-NoChange
093E088 14099750	[0.0295]	[0.0295]	103	V SPIAt 14.3	162.9	4.8	4.8	Crown	- none -	CC-NoChange
093E088 2710	[4.0985]	[4.0985]	23	V PI 18.0	1.3	5.3	5.3	Crown	- none -	CC-NoChange
093E088 2667	[1.8115]	[1.8115]	39	Non Commercial	6.6	12.0	12.0	Crown	- none -	CC-Reforest
093E088 2653	[3.0303]	[3.0303]	139	V SwPI 13.5	300.6	910.9	910.9	Crown	- none -	CC-NoChange
093E089 363	[3.9389]	[3.9389]	75	V AtSwPI 16.6	238.1	937.9	937.9	Crown	- none -	CC-NoChange
093E088 9408748	[1.1722]	[1.1722]	129	Non Commercial	44.8	52.5	52.5	Crown	- none -	CC-Reforest
093E088 9658692	[2.0824]	[2.0824]	132	V SwPI 12.5	317.4	661.0	661.0	Crown	- none -	CC-NoChange
093E088 10480024	[0.0169]	[0.0169]	158	Non Commercial	91.1	1.5	1.5	Crown	- none -	CC-Reforest
093E088 4828522	[2.3987]	[2.3987]	n/a	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 13969009	[11.1202]	[11.1202]	97	Non Commercial	25.4	282.5	282.5	Crown	- none -	CC-Reforest
093E088 6529919	[0.0025]	[0.0025]	39	V PI(At) 19.0	22.6	0.1	0.1	Crown	- none -	CC-NoChange
093E088 2630	[9.4373]	[9.4373]	129	Non Commercial	50.7	478.5	478.5	Crown	- none -	CC-Reforest
093E088 2672	[2.6321]	[2.6321]	89	Non Commercial	80.2	211.1	211.1	Crown	- none -	CC-Reforest
093E088 2672	[0.048]	[0.048]	89	Non Commercial	80.2	3.8	3.8	Crown	WTR	CC-Reforest
093E088 2629	[2.0417]	[2.0417]	79	V PISw 16.3	240.1	490.2	490.2	Crown	- none -	CC-NoChange
093E088 2705	[0.3528]	[0.3528]	139	V SwPI 15.0	198.2	69.9	69.9	Crown	- none -	CC-NoChange
093E088 2654	[1.5823]	[1.5823]	94	Non Commercial	79.9	126.4	126.4	Crown	- none -	CC-Reforest
093E089 46	[5.8632]	[5.8632]	75	V AtPI 15.6	87.2	511.3	511.3	Crown	- none -	CC-NoChange
093E089 358	[0.2679]	[0.2679]	155	V SwPI 14.0	338.1	90.6	90.6	Crown	- none -	CC-NoChange
093E088 14168835	[4.1393]	[4.1393]	139	Non Commercial	57.5	238.0	238.0	Crown	- none -	CC-Reforest
093E088 11409830	[0.0067]	[0.0067]	25	Non Commercial	0.2	0.0	0.0	Crown	- none -	CC-Reforest
093E088 11409830	[3.3607]	[3.3607]	25	Non Commercial	0.2	0.7	0.7	Crown	WTR	CC-Reforest
093E088 11689915	[1.7923]	[1.7923]	8	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 11689915	[0.0012]	[0.0012]	8	Non Commercial	0.0	0.0	0.0	Crown	WTR	CC-NoChange
093E088 7969729	[1.5922]	[1.5922]	8	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 7088701	[2.6405]	[2.6405]	7	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 7878820	[2.1842]	[2.1842]	119	Non Commercial	126.5	276.3	276.3	Crown	- none -	CC-Reforest
093E088 3078805	[9.5281]	[9.5281]	89	V PISw(BI) 15.7	226.6	2,159.1	2,159.1	Crown	- none -	CC-NoChange
093E088 3078805	[0.0125]	[0.0125]	89	V PISw(BI) 15.7	226.6	2.8	2.8	Crown	WTR	CC-NoChange
093E088 3028571	[5.8135]	[5.8135]	129	Non Commercial	94.6	550.0	550.0	Crown	- none -	CC-Reforest
093E088 3028571	[6.3124]	[6.3124]	129	Non Commercial	94.6	597.2	597.2	Crown	WTR	CC-Reforest
093E088 6048475	[6.1474]	[6.1474]	119	Non Commercial	71.1	437.1	437.1	Crown	- none -	CC-Reforest
093E088 15279130	[1.3659]	[1.3659]	159	Non Commercial	194.7	265.9	265.9	Crown	- none -	CC-Reforest
093E088 2671	[1.4011]	[1.4011]	109	V SwPI(At) 16.6	303.7	425.5	425.5	Crown	- none -	CC-NoChange



093E088 2671	[0.0608]	[0.0608]	109	V SwPI(At) 16.6	303.7	18.5	18.5	Crown	WTR	CC-NoChange
093E088 97289759	[0.8926]	[0.8926]	32	Non Commercial	0.0	0.0	0.0	Crown	- none -	CC-NoChange
093E088 2616	[3.4133]	[3.4133]	89	V AtSwPI 16.0	203.0	692.9	692.9	Crown	- none -	CC-NoChange
093E088 2670	[0.894]	[0.894]	89	V AtSw(PI) 16.0	66.3	59.3	59.3	Crown	- none -	CC-NoChange
093E088 2670	[0.0112]	[0.0112]	89	V AtSw(PI) 16.0	66.3	0.7	0.7	Crown	WTR	CC-NoChange
093E088 2669	[5.3679]	[5.3679]	129	V PISw 17.4	188.1	1,009.7	1,009.7	Crown	- none -	CC-NoChange
093E088 2669	[3.959]	[3.959]	129	V PISw 17.4	188.1	744.7	744.7	Crown	WTR	CC-NoChange
093E088 99889349	[3.7298]	[3.7298]	139	V SwPIBI 13.5	89.8	334.9	334.9	Crown	- none -	CC-NoChange
093E088 2624	[1.687]	[1.687]	104	Non Commercial	76.1	128.4	128.4	Crown	- none -	CC-Reforest
093E088 2624	[1.0617]	[1.0617]	104	Non Commercial	76.1	80.8	80.8	Crown	WTR	CC-Reforest
093E088 1638570	[5.8484]	[5.8484]	89	V SwAtPI 15.6	33.6	196.5	196.5	Crown	- none -	CC-NoChange
093E088 1638570	[0.0597]	[0.0597]	89	V SwAtPI 15.6	33.6	2.0	2.0	Crown	WTR	CC-NoChange
093E088 1669203	[29.9264]	[29.9264]	131	Non Commercial	51.3	1,535.2	1,535.2	Crown	- none -	CC-Reforest
093E088 1669203	[2.0691]	[2.0691]	131	Non Commercial	51.3	106.1	106.1	Crown	WTR	CC-Reforest
Total	632.9886	632.9886			102.8	65,071.0	65,071.0			

c) Priority

Priority
Partial Cut
Closest To Harvest

d) Harvest Order

Order	Polygon
--------------	----------------

e) Constraints

Constraint	Polygon
-------------------	----------------

f) Actual average Harvest with constraints and non harvest years over 250 year planning horizon:

Item	Gross Area (ha)	Net Area (ha)	Inc. Area (ha)	Conifer (m³)	Deciduous (m³)	Total (m³)	Average (m³/yr)
Ownership							
Crown	633.0	633.0	547.9	291,202	16,549	307,751	1,231.0
Total	633.0	633.0	547.9	291,202	16,549	307,751	1,231.0
FC RES							
- none -	601.3	601.3	516.2	275,656	16,546	292,202	1,168.8
WTR	31.7	31.7	31.6	15,546	3	15,549	62.2
Total	633.0	633.0	547.9	291,202	16,549	307,751	1,231.0

g) Harvest Issues

Years	Issue
--------------	--------------

h) Polygons not harvested

Polygon	Reason	Area
093E088 96809345	Harvest Parameters not met	5.8
093E088 2621	Harvest Parameters not met	4.1
093E088 2623	Harvest Parameters not met	1.4
093E088 2699	Harvest Parameters not met	6.7
093E088 2634	Harvest Parameters not met	1.3
093E088 15198806	Harvest Parameters not met	0.0
093E088 4479476	NC without Reforest	0.9
093E088 2635	Harvest Parameters not met	2.0
093E088 5438586	NC without Reforest	2.2
093E088 5679662	NC without Reforest	1.1
093E088 553	Simulation completed prior To this polygon being harvested	0.0
093E088 2666	Harvest Parameters not met	5.8
093E088 2640	Harvest Parameters not met	6.4
093E088 11139905	Harvest Parameters not met	0.1
093E088 517	Harvest Parameters not met	0.0
093E088 14199159	NC without Reforest	6.8



093E088 5819689	Harvest Parameters not met	0.3
093E088 11078818	NC without Reforest	11.3
093E088 8989480	NC without Reforest	3.4
093E088 14489107	Harvest Parameters not met	0.0
093E088 2692	Harvest Parameters not met	2.5
093E088 11188696	Harvest Parameters not met	2.2
093E088 3298859	NC without Reforest	1.3
093E088 4828522	NC without Reforest	2.4
093E088 11689915	NC without Reforest	1.8
093E088 11689915	NC without Reforest	0.0
093E088 7969729	NC without Reforest	1.6
093E088 7088701	NC without Reforest	2.6
093E088 97289759	NC without Reforest	0.9
093E088 2670	Harvest Parameters not met	0.9
093E088 2670	Harvest Parameters not met	0.0
093E088 99889349	Harvest Parameters not met	3.7
093E088 1638570	Harvest Parameters not met	5.8
093E088 1638570	Harvest Parameters not met	0.1
Total		85.1

i) Polygons Comments

Polygon	Comment
---------	---------

3.0 Conclusions

Enter your conclusions to the user of this section on your observations about the upward or downward bias of the assumptions used to calculate the results. Open this report.txt file in the 'Note Pad' program or into Word for Windows to edit.



Appendix 8 VRI Variables Used in Woodlot 4

The following Vegetation Resources Inventory (VRI) variables are imported by Woodlot 4.0 (Woodlot 4.1 & 4.2)* Refer also to Appendix for variables used in Woodlot 4 CSV files.

VRI Short Name (used in Woodlot 4)	VRI Attribute Name	VRI Forestry Term	VRI Description
adjst_area	adjusted_ind	Adjusted indicator	Indicates whether or not the polygon has been adjusted.
alpn_desig	alpine_designation	Alpine Designation	The location of the land unit with respect to location and elevation. An interpretation is applied as to whether
atrib_date	attribution_base_date	Attribution Base Date	The date that the information about this polygon is considered to be based on. It is currently populated,
av_lbl_ht	avail_label_height	Available Label Height	The available height for a label, in meters for a 1:15,000 map presentation. This is derived during the label
av_lbl_wd	avail_label_width	Available Label Width	The available width for a label, in meters for a 1:15,000 map presentation. This is derived during the label
bioms_bark	bark_biomass_per_ha	Bark Biomass	this is the total whole stem biomass per hectare of all species based on a utilization of 4.0cm expressed as
basal_area	basal_area	Basal Area at Reference Year	Basal area is the total cross sectional area, at breast height, of all living trees visible to the photo interpreter
bclcs_lv_1	bclcs_level_1	British Columbia Land Cover Classification Scheme Level 1	The first level of the BC land cover classification scheme classifies the presence or absence of vegetation
bclcs_lv_2	bclcs_level_2	British Columbia Land Cover Classification Scheme Level 2	The second level of the BC land cover classification scheme classifies the polygon as to the land cover
bclcs_lv_3	bclcs_level_3	British Columbia Land Cover Classification Scheme Level 3	The location of the polygon relative to elevation and drainage, and is described as either alpine, wetland or
bclcs_lv_4	bclcs_level_4	British Columbia Land Cover Classification Scheme Level 4	Classifies the vegetation types and non-vegetated cover types (as described by the presence of distinct
bclcs_lv_5	bclcs_level_5	British Columbia Land Cover Classification Scheme Level 5	Classifies the vegetation density classes and Non-Vegetated categories.
bec_phse	bec_phase	Biogeoclimatic Phase	A code indicating the polygon's biogeoclimatic phase.
bec_szone	bec_subzone	Biogeoclimatic Subzone	A code indicating the polygon's biogeoclimatic sub zone.
bec_var	bec_variant	Biogeoclimatic Variant	A code indicating the polygon's biogeoclimatic variant.
bec_zone	bec_zone_code	Biogeoclimatic Zone	The Biogeoclimatic Zone(s) that fall within the forest cover polygon. A Biogeoclimatic Zone is a large
bioms_brch	branch_biomass_per_ha	Branch Biomass	this is the total branch biomass per hectare of all species based on a utilization of 4.0cm expressed as
bryoid_pct	bryoid_cover_pct	Bryoid Cover Percentage	The percent cover of Bryoids: includes bryophytes (mosses, net liverworts, hornworts) and non-crustose
c_i_code	coast_interior_cd	Coast Interior Code	A code indicating that the stand is located in the Coast or Interior Region of the Province. The Coast
compartmnt	compartment	Inventory Compartment	Inventory Compartments are a geographic subdivision of an Inventory Region, usually defining a watershed
comp_let	compartment_letter	Inventory Compartment Letter	The Compartment Letter(s) that fall within the forest cover polygon. Compartment Letter is a geographic
cr_closure	crown_closure	Crown Closure	Tree crown closure is the percentage of ground area covered by the vertically projected crowns of the tree
cc_class	crown_closure_class_cd	Crown Closure Class Code	The class code for the ground area covered by the vertically projected crowns of the tree cover for each
age_dta_cd	data_source_age_cd	Data Source Age Code	The source of data used for the interpretation of age and the derivation of the year of origin.
b_a_dta_cd	data_source_basal_area_cd	Data Source Basal Area Code	The source of data used for the interpretation of the basal area.
ht_data_cd	data_source_height_cd	Data Source Height Code	The source of data used for the interpretation height.
stem_ha_cd	data_src_vri_live_stem_ha_cd	Data Source VRI Live Stem per Hectare Code	The source of the data that was used for the interpretation of the vri net live stems per hectare, or stand
dbh_limit	dbh_limit	Diameter Breast Height Limit	A code indicating the minimum diameter breast height (DBH) for measuring trees (i.e. stems) in the field
dvlvtot_125	dead_stand_volume_125	Dead Stand Volume for 12.5 cm	This is the total net dead volume per hectare of all species determined by percent basal area of the tree
dvlvtot_175	dead_stand_volume_175	Dead Stand Volume for 17.5 cm	This is the total net dead volume per hectare of all species determined by percent basal area of the tree
dvlvtot_225	dead_stand_volume_225	Dead Stand Volume for 22.5 cm	This is the total net dead volume per hectare of all species determined by percent basal area of the tree
dvlsp1_125	dead_vol_per_ha_spp1_125	Leading Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the leading species determined by percent basal area of the tree
dvlsp1_175	dead_vol_per_ha_spp1_175	Leading Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the leading species determined by percent basal area of the tree
dvlsp1_225	dead_vol_per_ha_spp1_225	Leading Species Dead Volume	This is the net dead volume per hectare of the leading



		per Hectare at 22.5 cm	species determined by percent basal area of the tree
dvls2_125	dead_vol_per_ha_spp2_125	Second Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the second species determined by percent basal area of the tree
dvls2_175	dead_vol_per_ha_spp2_175	Second Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the second species determined by percent basal area of the tree
dvls2_225	dead_vol_per_ha_spp2_225	Second Species Dead Volume per Hectare at 22.5 cm	This is the net dead volume per hectare of the second species determined by percent basal area of the tree
dvls3_125	dead_vol_per_ha_spp3_125	Third Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the third species determined by percent basal area of the tree
dvls3_175	dead_vol_per_ha_spp3_175	Third Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the third species determined by percent basal area of the tree
dvls3_225	dead_vol_per_ha_spp3_225	Third Species Dead Volume per Hectare at 22.5 cm	This is the net dead volume per hectare of the third species determined by percent basal area of the tree
dvls4_125	dead_vol_per_ha_spp4_125	Fourth Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the fourth species determined by percent basal area of the tree
dvls4_175	dead_vol_per_ha_spp4_175	Fourth Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the fourth species determined by percent basal area of the tree
dvls4_225	dead_vol_per_ha_spp4_225	Fourth Species Dead Volume per Hectare at 22.5 cm	This is the net dead volume per hectare of the fourth species determined by percent basal area of the tree
dvls5_125	dead_vol_per_ha_spp5_125	Fifth Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the fifth species determined by percent basal area of the tree
dvls5_175	dead_vol_per_ha_spp5_175	Fifth Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the fifth species determined by percent basal area of the tree
dvls5_225	dead_vol_per_ha_spp5_225	Fifth Species Dead Volume per Hectare at 22.5 cm	This is the net dead volume per hectare of the fifth species determined by percent basal area of the tree
dvls6_125	dead_vol_per_ha_spp6_125	Sixth Species Dead Volume per Hectare at 12.5 cm	This is the net dead volume per hectare of the sixth species determined by percent basal area of the tree
dvls6_175	dead_vol_per_ha_spp6_175	Sixth Species Dead Volume per Hectare at 17.5 cm	This is the net dead volume per hectare of the sixth species determined by percent basal area of the tree
dvls6_225	dead_vol_per_ha_spp6_225	Sixth Species Dead Volume per Hectare at 22.5 cm	This is the net dead volume per hectare of the sixth species determined by percent basal area of the tree
n_log_date	earliest_nonlogging_dist_date	Earliest non logging disturbance date	Represents the polygons earliest non-logging disturbance date.
n_log_dist	earliest_nonlogging_dist_type	Earliest non logging disturbance type	Represents the polygons earliest non-logging disturbance type.
eco_src_cd	ecosys_class_data_src_cd	Ecosystem Class Data Source Code	The source of the data used in the interpretation of the ecological attributes (Surface expression, modifying
cov_pct_2	est_coverage_pct_2	Land Cover Component Percentage 2	The amount the polygon occupied by the second most dominate Land Cover Component. The sub-division
cov_pct_3	est_coverage_pct_3	Land Cover Component Percentage 3	The amount the polygon occupied by the third most dominate Land Cover Component. The sub-division of
cov_pct_1	est_coverage_pct_1	Land Cover Component Percentage 1	The amount the polygon occupied by the predominate Land Cover Component. The sub-division of a
est_si	est_site_index	Estimated Site Index	Estimated site index is an interpreter estimated site index for tree layers with a leading species age less
si_data_cd	est_site_index_source_cd	Estimates site index source code	Describes the process used to determine the estimated site index prediction. for tree layers with a leading
est_si_spc	est_site_index_species_cd	Estimated Site Index Species Code	Estimated site index species is the tree species from which the site index for the polygon has been
feat_skey	feature_class_skey	Feature Class Skey	Unique identifier for a feature class.
feature_id	feature_id	Feature Identity	Provincially unique identifier for an instance of a spatial feature
fiz_cd	fiz_cd	Forest Inventory Zone	The Forest Inventory Zone(s) (FIZ) that fall within the forest cover polygon. FIZ zones were developed to
bioms_fol	foliage_biomass_per_ha	Foliage Biomass	this is the total bark biomass per hectare of all species based on a utilization of 4.0cm expressed as
rank_cd	for_cover_rank_cd	Forest Cover Rank Code - Rank or Importance of Layer	A numeric designation of the relative importance of the layer component in the stand as determined by the
fmlb	for_mgmt_land_base_ind	Forest Management Land Base	An indicator placing the polygon in the Forest management Land Base. This is the equivalent to THLB (as a
ftg_ind	free_to_grow_ind	Free to grow indicator	Indicates whether or not the polygon represents a Free To Grow opening, a point where the basic
full_label	full_label	Full Label	The full Vegetation Map label. It contains the polygon id, opening number, species composition, projected
geometry	geometry	Geometry	A spatial polygon feature used to store the map component of the Vegetation Cover area.
harv_date	harvest_date	Harvest Date	The date in which the polygon was last harvested.
herb_cover	herb_cover_pattern	Herb Cover Pattern	Herb cover pattern is a code that describes the spatial distribution of the herbaceous species within the
herb_pct	herb_cover_pct	Herb Cover Percentage	Herb cover percent is the percentage of ground area covered by herbaceous cover visible to the photo
herb_type	herb_cover_type	Herb Cover Type	This set of attributes describes the portion of herb cover that is no obscured by the vertical projection of the
input_date	input_date	Input Date	The date the forest cover information was entered into the Provincial Data Base.
intrp_date	interpretation_date	Interpretation Date	The date on which the polygon estimates were photo



			interpreted.
interp_cd	interpreted_data_src_cd	Interpreted Data Source Code	The source of the data that contributed to the determination of the classification description. All values
interpretr	interpreter	Interpreter	The name of the person who provided the estimates for the data associated with each polygon.
inv_region	inventory_region	Inventory Region	Inventory Regions are an administrative and planning level boundary used to subdivide the Province into 88
inv_std_cd	inventory_standard_cd	Inventory Standard Code	Code indicating under which inventory standard the data was collected. Values are: "V:" for Vegetation
lbl_ctr_x	label_centre_x	Label Centre X	The x co-ordinate of the suggested centre of the label.
lbl_ctr_y	label_centre_y	Label Centre Y	The y co-ordinate of the suggested centre of the label.
lbl_ht	label_height	Label Height	The height of the full label for a 1:15,000 map presentation in meters. It is calculated as 30 times the
lbl_width	label_width	Label Width	The width of the full label for a 1:15,000 map presentation in meters. It is calculated as 18 times the
land_cd_2	land_cover_class_cd_2	Land Cover Class Code 2	The Land Cover component Code_2 describes the second most dominate land cover type by percent area
land_cd_3	land_cover_class_cd_3	Land Cover Class Code 3	The Land Cover component Code_3 describes the third most dominate land cover type by percent area
land_cd_1	land_cover_class_cd_1	Land Cover Class Code 1	The Land Cover component Code_1 describes the first most dominate land cover type by percent area
layer_id	layer_id	Layer Identity	The unique business identification of a layer, or horizontal stratum, in a stand. Each layer is normally
lbl_opn_no	line_1_opening_number	Label Line 1 Opening Number	Indicates combination of layers and tree class to be summarized for volume.
lbl_opn_cd	line_1_opening_symbol_cd	Label Line 1 Opening Symbol Code	The opening symbol code is represented as on of the following characters: 'x', ' '
lbl_polyid	line_2_polygon_id	Label Line 2 Polygon Identity	The polygon ID for which this is the label. This is followed by /L (a multi-layered stand) or /S (a separate
lbl_specis	line_3_tree_species	Label Line 3 Tree Species	A list of major species (minor species), ordered by percentage. The species symbols are F (Douglas fir), C
lbl_cls_in	line_4_classes_indexes	Label Line 4 Index Classes	Line 4 is made up of 4 numerical characters followed by a hyphen, the site index, a slash, and the
lbl_vegcov	line_5_vegetation_cover	Label Line 5 Vegetation Cover	A listing of the non-vegetated descriptors or the non tree vegetative cover types ordered from most to least
lbl_hist	line_6_site_prep_history	Label Line 6 Site Preparation History	The site preparation history represented by a list of abbreviations for the techniques used, followed by the
lbl_distur	line_7_activity_hist_symbol	Label Line 7 Activity History Symbol	A symbol representing what techniques were used in the labelled area. The symbol is a circle with 0 to 4
lbl_his_sy	line_7A_stand_tending_history	Label Line 7A Stand Tending History	Symbols representing tending history
lbl_tend	line_7B_disturbance_history	Label Line 7B Disturbance History	The disturbance history described as a list of abbreviations for the techniques along with the years each
lbl_plant	line_8_planting_history	Label Line 8 Planting History	The planting (or regeneration) history described as a list of years during which artificial plantings was
lvltot_125	live_stand_volume_125	Live Stand Volume for 12.5cm	This is the total net live volume per hectare of all species determined by percent basal area of the tree layer
lvltot_175	live_stand_volume_175	Live Stand Volume for 17.5cm	This is the total net live volume per hectare of all species determined by percent basal area of the tree layer
lvltot_225	live_stand_volume_225	Live Stand Volume for 22.5cm	This is the total net live volume per hectare of all species determined by percent basal area of the tree layer
lvlspp1_125	live_vol_per_ha_spp1_125	Leading Species Live Volume per Hectare at 12.5 cm	This is the net live volume per hectare of the leading species determined by percent basal area of the tree
lvlspp1_175	live_vol_per_ha_spp1_175	Leading Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the leading species determined by percent basal area of the tree
lvlspp1_225	live_vol_per_ha_spp1_225	Leading Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the leading species determined by percent basal area of the tree
lvlspp2_125	live_vol_per_ha_spp2_125	Second Species Live Volume per Hectare at 12.5 cm	This is the net live volume per hectare of the second species determined by percent basal area of the tree
lvlspp2_175	live_vol_per_ha_spp2_175	Second Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the second species determined by percent basal area of the tree
lvlspp2_225	live_vol_per_ha_spp2_225	Second Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the second species determined by percent basal area of the tree
lvlspp3_125	live_vol_per_ha_spp3_125	Third Species Live Volume per Hectare at 12.5 cm	This is the net live volume per hectare of the third species determined by percent basal area of the tree
lvlspp3_175	live_vol_per_ha_spp3_175	Third Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the third species determined by percent basal area of the tree
lvlspp3_225	live_vol_per_ha_spp3_225	Third Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the third species determined by percent basal area of the tree
lvlspp4_125	live_vol_per_ha_spp4_125	Fourth Species Live Volume per Hectare at 12.5 cm	This is the net live volume per hectare of the fourth species determined by percent basal area of the tree
lvlspp4_175	live_vol_per_ha_spp4_175	Fourth Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the fourth species determined by percent basal area of the tree
lvlspp4_225	live_vol_per_ha_spp4_225	Fourth Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the fourth species determined by percent basal area of the tree
lvlspp5_125	live_vol_per_ha_spp5_125	Fifth Species Live Volume per	This is the net live volume per hectare of the fifth species



		Hectare at 12.5 cm	determined by percent basal area of the tree layer
lvsp5_175	live_vol_per_ha_spp5_175	Fifth Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the fifth species determined by percent basal area of the tree layer
lvsp5_225	live_vol_per_ha_spp5_225	Fifth Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the fifth species determined by percent basal area of the tree layer
lvsp6_125	live_vol_per_ha_spp6_125	Sixth Species Live Volume per Hectare at 12.5 cm	This is the net live volume per hectare of the sixth species determined by percent basal area of the tree
lvsp6_175	live_vol_per_ha_spp6_175	Sixth Species Live Volume per Hectare at 17.5 cm	This is the net live volume per hectare of the sixth species determined by percent basal area of the tree
lvsp6_225	live_vol_per_ha_spp6_225	Sixth Species Live Volume per Hectare at 22.5 cm	This is the net live volume per hectare of the sixth species determined by percent basal area of the tree
map_id	map_id	Forest Cover Map Number	Identifies the Vegetation Cover Map corresponding to the VRI file
mod_proces	modifying_process	Modifying Process	A natural mechanism of weathering, erosion and soil material deposition that result in the modification of
nfor_desc	non_forest_descriptor	Non Forest Descriptor	A classification code indicating that the forest cover type is not currently forested, but is capable of
np_code	non_productive_cd	Non Productive Code	A unique numeric code that references the classes or type of non-productive areas or land that is incapable
np_desc	non_productive_descriptor_cd	Non Productive Descriptor Code	A unique code that references the classes or type of non-productive areas. This is a FIP classification
nveg_cov_1	non_veg_cover_pattern_1	Non Vegetation Cover Pattern One	Non-vegetated cover pattern_1 describes the spatial distribution of the predominate non-vegetated cover
nveg_cov_2	non_veg_cover_pattern_2	Non Vegetation Cover Pattern 2	Non-vegetated cover pattern_2 describes the spatial distribution of the predominate non-vegetated cover
nveg_cov_3	non_veg_cover_pattern_3	Non Vegetation Cover Pattern 3	Non-vegetated cover pattern_3 describes the spatial distribution of the predominate non-vegetated cover
nveg_pct_1	non_veg_cover_pct_1	Non Vegetation Cover Percentage One	The area the predominate non-vegetated portion covers expressed as a percentage of the entire polygons
nveg_pct_2	non_veg_cover_pct_2	Non Vegetation Cover Percentage Two	The area the second most prevalent non-vegetated portion covers expressed as a percentage of the entire
nveg_pct_3	non_veg_cover_pct_3	Non Vegetation Cover Percentage 3	The area the third most prevalent non-vegetated portion covers expressed as a percentage of the entire
nveg_typ_1	non_veg_cover_type_1	Non Vegetation Cover Type One	Non-vegetated cover type_1 is the designation for the predominate observable non-vegetated land cover
nveg_typ_2	non_veg_cover_type_2	Non Vegetation Cover Type Two	Non-vegetated cover type_2 is the designation for the second most prevalent observable non-vegetated
nveg_typ_3	non_veg_cover_type_3	Non Vegetation Cover Type Three	Non-vegetated cover type_3 is the designation for the third most prevalent observable non-vegetated land
objectid	objectid	Object Identity	
open_id	open_id	Opening Indicator	System generated value uniquely identifying the opening in the FLNROD Forest Tenures Administration
open_ind	opening_ind	Opening Indicator	Indicates whether or not the polygon represents a silviculture opening
open_num	opening_number	Opening Number	A unique number assigned to each opening in the forest caused by a disturbance (e.g. fire, logging, etc.) for
open_src	opening_source	Opening Source	Defines whether the opening came from ISIS or MLSIS This field is not populated in the current data model.
orgunit_cd	org_unit_code	Organisation Unit Code	Forest District Codes, 3-character description
orgunit_no	org_unit_no	Organisation Unit Number	Number from Org Unit code table representing the organization that collected the data.
poly_area	polygon_area	Forest Polygon Area	The area of a polygon; usually derived from geographic information system processing software. The total
poly_id	polygon_id	Forest Cover Polygon Number	The polygon number is a reference number (non-unique) assigned to each Vegetated or Non-Vegetated
printable	printable_ind	Printable	"Y" means print the label. "N" means do not print the label.
proj_age_1	proj_age_1	Projected Age for Leading Species	Projected age for leading species
proj_age_2	proj_age_2	Projected Age for Second Species	Projected age for secondary species
p_age_cas1	proj_age_class_cd_1	Projected age class code stand age 1	The age class projected to the current year for species 1.
p_age_cas2	proj_age_class_cd_2	Projected age class code stand age 2	The age class projected to the current year for species 1.
proj_ht_1	proj_height_1	Projected Height for Leading Species	Projected height for leading species
proj_ht_2	proj_height_2	Projected Height for Second Species	projected height for second species
p_ht_cas1	proj_height_class_cd_1	Projected height class code 1	The height class projected to the current year for species 1.
p_ht_cas2	proj_height_class_cd_2	Projected height class code 2	The height class projected to the current year for species 2.
project_id	project	Project	The business assigned name of the project. The name typically reflects a Timber Supply Area, an initiating
proj_date	projected_date	Projected Date	The date to which time dependent stand information is projected. Used to determine the date to which time



q_diam_125	quad_diam_125	Quadratic Diamter at 12.5 cm	The quadratic mean stand diameter (breast height), at the projection date, based on the 12.5 cm utilization
q_diam_175	quad_diam_175	Quadratic Diamter at 17.5 cm	The quadratic mean stand diameter (breast height), at the projection date, based on the 17.5 cm utilization
q_diam_225	quad_diam_225	Quadratic Diamter at 22.5 cm	The quadratic mean stand diameter (breast height), at the projection date, based on the 22.5 cm utilization
ref_date	reference_date	Reference Date	The date of the source data on which the interpretation is based. Known as the 'Reference Year' in the VIF
ref_yr_id	reference_year	Reference Year	The year of the source data on which the interpretation is based. Known as the 'Reference Year' in the VIF
shrb_patt	shrub_cover_pattern	Shrub Cover Pattern	Shrub cover pattern is a code that describes the spatial distribution of the shrubs within the polygon. Shrub
shrb_cc	shrub_crown_closure	Shrub Crown Closure	Shrub crown closure is the percentage of ground area covered by the vertically projected crowns of the
shrb_ht	shrub_height	Shrub Height	The average height of the shrubs contained in the polygon as interpreted from medium scale photography.
site_index	site_index	Site Index	Site index is an estimate of site productivity for tree growth (height in metres at breast height age of 50
site_meso	site_position_meso	Site Position Meso	A code denoting the relative position of the sampling site within a catchment area with the intent to be
sm_label	small_label	Small Label	The two-line (or format 3) version of the label. This label contains, at most, 2 lines build from the line 1 and
soil_mst_2	soil_moisture_regime_2	Soil Moisture Regime 2	The average amount of soil water annually available for evapotranspiration by vascular plants averaged
soil_mst_3	soil_moisture_regime_3	Soil Moisture Regime 3	The average amount of soil water annually available for evapotranspiration by vascular plants averaged
soil_mst_1	soil_moisture_regime_1	Soil Moisture Regime 1	The average amount of soil water annually available for evapotranspiration by vascular plants averaged over
soil_nutr	soil_nutrient_regime	Soil Nutrient Regime	A code to denote, on a relative scale, the available nutrient supply for plant growth. The soil's nutrient
cruise_no	special_cruise_number	Special Cruise Number	The numeric code of the Public Sustained Yield Unit(s) (PSYU) that fall within the forest cover polygon.
cruise_cd	special_cruise_number_cd	Special Cruise Number Code	The numbers of the Public Sustained Yield Unit (PSYU) Block(s) that fall within the forest cover polygon.
spec_cd_1	species_cd_1	Species Composition Code - Leading Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_cd_2	species_cd_2	Species Composition Code - Second Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_cd_3	species_cd_3	Species Composition Code - Third Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_cd_4	species_cd_4	Species Composition Code - Fourth Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_cd_5	species_cd_5	Species Composition Code - Fifth Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_cd_6	species_cd_6	Species Composition Code - Sixth Species	A code describing the leading commercial species or brush species in the layer. The species with the
spec_pct_1	species_pct_1	Leading Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
spec_pct_2	species_pct_2	Second Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
spec_pct_3	species_pct_3	Third Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
spec_pct_4	species_pct_4	Fourth Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
spec_pct_5	species_pct_5	Fifth Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
spec_pct_6	species_pct_6	Sixth Species Percentage	Percentages of the layer that each tree species occupies. For older stands, tree species percentage is
dead_pct	stand_percentage_dead	Stand Percentage Dead	Represents the percent of the stand that has had an epidemic loss.
surf_exp	surface_expression	Surface Expression	The form of surficial material apparent on the medium scale photography. A simplified attribution is used
tree_patrn	tree_cover_pattern	Tree Cover Pattern	A numeric code that identifies the spatial distribution of the tree layer in the polygon. Examples include
vert_compl	vertical_complexity	Vertical Complexity	The subjective classification that describes the form of each tree layer as indicated by the relative
dead_stems	vri_dead_stems_per_ha	VRI Dead Stems per Hectare	The number of standing dead trees visible to the photo interpreter in the dominant, codominant and high
live_stems	vri_live_stems_per_ha	VRI Live Stems per Hectare	The average number of living trees visible to the photo interpreter in the dominant, co-dominant and high
bioms_ws	whole_stem_biomass_per_ha	Whole Stem Biomass	this is the total whole stem biomass per hectare of all species on a utilization of 4.0cm expressed as

***Source:**

Ministry of Forests, Lands and Natural Resource Operations "VRI Relational Data Dictionary (version 4.0) – Draft"

http://www.for.gov.bc.ca/hts/vridata/standards/datadictionary/vegcomp_poly_rank1_data_dictionary_draft4.0.pdf Downloaded from Internet July 10, 2014



Appendix 9 Woodlot for Windows What's New ?

Woodlot 4.1 Updates

Woodlot for Windows (Woodlot) is timber supply software used on woodlots and small woodlands in BC.

An update was completed in March 2014, to Version 4.1, to provide efficiency enhancements. No changes were made to methodology or modelling. Updates are listed below.

Tabular View

- Cells now editable – read only (VRI and results) cells are greyed
- Added Friendly variable names for Column Headers
- Column Filter (sets which columns are displayed in the tabular view)
 - o Select columns and assigned a name
 - o Sort columns (by dragging the tables column headers) will be saved in the filter
 - o Column filters are saved to the WLT file
 - o WLT remembers which Column Filter is being used.
 - o Columns widths will be saved in the registry (not by filter).
 - o Filters can be exported and imported to transfer between WLT files.
- Row Filter (sets which rows are displayed in the tabular view)
 - o Add logic rules to filter out certain rows
 - o Row Filters are saved in the WLT
 - o WLT remembers which Row Filter is being used.
 - o Filters can be exported and imported to transfer between WLT files.
- Display options added to header and saved in WLT file

Shape File Importing

- Imports *.shp file
 - o Imports VRI and Woodlot columns
 - o Import multiple files over top if needed
 - o Import graphics file into a lot file
- New dialogue created to guide shp file importing and choose best importing settings
- Import more VRI columns.
 - o live and dead volumes 12.5 / 17.5
 - o live and dead volumes by species 12.5 / 17.5
 - o dead percent
 - o dead stems
 - o BEC subzone and variant
 - o Full label - stored in VRI database now
 - o Added LBL_CTR_X, LBL_CTR_Y
 - o Added NVEG_TYP_3, NVEG_PCT_3

Polygon View

- Added Comments section
- Added Calculate Site Index feature to yield curve sections
- Updated VRI data screen with more columns of pertinent data
- Interface enhancements
 - o Expanded interface workspace
 - o Save last screen position
 - o Classifiers box widened (interface box)
 - o Arrow key down function completed
 - o Enhancements made for speed of use
 - o Expanded BEC items to report full BEC and subzone if available
- Reports additional TIPSYP and VDYP error messages not available before
- Rename Polygon – added label override dialogue to update polygon name on maps
- Added map label to small map
- Added View items to toolbar



General Efficiency Enhancements and Fixes

- o Performance improved especially for large files
- o Rewrote sorting routine
- o Canadian date format fix
- o Scientific notation issue with mapsheets
- o Blank species issue on VDYP and TIPSYP fixed
- o DWB OAF fix
- o OAF2 now is defaulted to 0.95 instead of DWB. DWB in TIPSYP uses VDYP routines that may not be accurate for managed stands (per M. DiLucca)
- o Blank constraints crashed program fix

Map View

- Added small legend to map
- Started proof of concept on theming for future - 2 incomplete draft sample themes (Easter Egg only), for Enfor testing only (not a deliverable under version 4.1)

Menus

File Menu

- Added Import Shp (replaces Import VRI)
- Re-ordered features

Edit Menu

- Added Select None – to deselect map polygons
- Added convert dead stands to NC

View Menu

- Moved screen specific View menu items to applicable screens
- Added Hide non-FMLB

About Screen

- Updated versioning and dates

Information Message Log (activated from lower left corner)

- Added more information to help with issue identification

Project Screen

- Added new Unique Row/ID/Row # to help with importing shp files

Calculations and Yield Curves

- No changes

Reports

- No changes

Installation

- New installation MSI
- Files are forward compatible but not backward compatible to older versions of Woodlot 4.

More Information

For more information on the updated software, please contact:


- Peter Graff, BC Ministry of Forests, Lands and Resource Operations, or
- Tom Bradley, Federation of BC Woodlot Associations.
- Download from: <https://www.for.gov.bc.ca/hth/timber-tenures/woodlots/woodlot-for-windows.htm>

For user support, please contact Mike Bandstra, Smithers, Federation contractor.




Woodlot 4.2 Updates

Woodlot for Windows (Woodlot) is a timber supply software program used to calculate harvest rates on Woodlot Licences in BC's Woodlot Licence Program. Woodlot version 4.2 (released April 2016) replaces Woodlot 4.1 (July 2014) and includes the following updates:

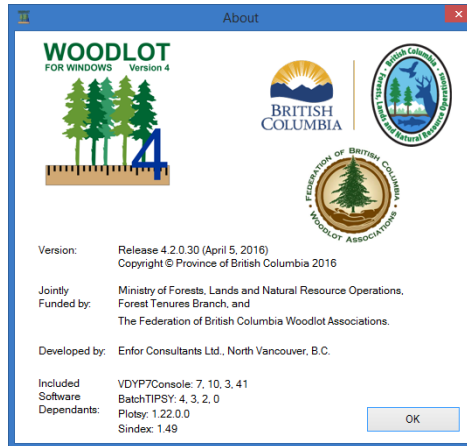

Age Class Distribution Graph

- Age class distribution graphing updated. When you create a woodlot report and check the Age Class Graph, you can now choose between two age class distribution graph templates:
 - Age Class Distribution – Over Time.** Displays the age class distribution of the forest in 50 year increments from current date. Current year = 0.
 - Age Class Distribution – Current Age.** Displays the age class distribution of the forest as of today. Current year = 0.
- Age class distribution graphs now saved with your woodlot (.wlt) file.

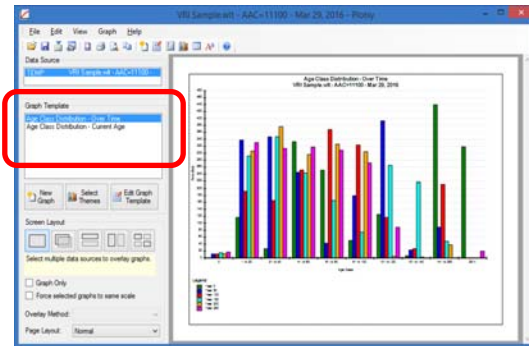

Classifier Field names

- Upper case and lower case classifier names can now be used for easier use by GIS users. Also corrected the feature to delete classifiers.

GIS New File Import

- Implemented a new GIS inventory shapefile import feature and updated the File menu. Use File Import (shp) to import any shapefile and follow the prompts.

Tabular View

- Corrected the Tabular view to improve the column click-and-drag rearranging feature.
- Tabular view Polygon status icon(s) will update to “?” if changes are made in the Tabular view that require you to update Yields for polygons.

092H049 487	
092H049 492	
092H049 485	

Minimum Volume Limits on Polygons

- Partial cut - Woodlot now defaults to require a minimum 50 m³/ha before re-entry on partial cut stands. This will avoid a user accidentally specifying a re-entry % where the resulting re-entry volume is unreasonably low (e.g. 2 m³/ha). Woodlot will defer harvesting a polygon until the new minimum is reached. Users can over-ride the default by entering their own minimum re-entry volume.
- Clearcut – Min volume to harvest set to 0m³/ha to avoid crashing (if accidentally set to blank).



Highlighting Fields in Column Filters

- A new checkbox was added to the Column Filter screen in Tabular View to “Show Empty Columns”; empty columns of data will be displayed as red in the list with the checkbox on. By default, the checkbox is off and empty columns are not displayed in the Column Filters window.
- (Note that columns displayed on the left side of the Column Filter screen are from your data file; columns listed on the right are those displayed in the Tabular View in Woodlot.)

Latest TIPSy and VDYP7

- TIPSy - updated to BatchTIPSy 4.3.2. TIPSy has minor updates by the Ministry for the TIPSy database, Sindex, and Plotsy.
- VDYP7 - updated to VDYP7 Console 7.10.3.41. This is the latest released version of VDYP7 available from the Ministry. (Please note that the Ministry is continuing to work on VDYP7 with an update ETA later in 2016.)
- Yields in Woodlot are not expected to change significantly as a result of these updates.

Other Updates

Several minor updates have been provided to improve usability in Woodlot 4.2, such as:

- Map labels - method and positioning improved, added to small map.
- Woodlot filename and AAC now sent to Plotsy header for graphs.

Implementation - Where to Get Woodlot 4.2

Woodlot 4.2 is available as a self-installing download from the Ministry Woodlot for Windows AAC Program webpage, located at <https://www.for.gov.bc.ca/hth/timber-tenures/woodlots/woodlot-for-windows.htm>

Ministry staff are asked to install Woodlot 4.2 to their local computer. For Ministry staff, the Woodlot Citrix server is phased out. Please contact your IT department if any questions.

Questions

If any questions, please contact the Ministry of Forests, Lands and Natural Resource Operations, Geoff Klassen Geoffrey.Klassen@gov.bc.ca or Emma Neill Emma.Neill@gov.bc.ca.

Thank you for using Woodlot for Windows, we wish you success.



Woodlot 4.3 Updates

Introduction


Woodlot for Windows (Woodlot) is timber supply software used to calculate harvest rates on Woodlot Licences in BC's Woodlot Licence Program.

Woodlot version 4.3 (released July 2018) replaced Woodlot 4.2 (Apr 2016) and included the following updates.

Update Growth and Yield Models

Growth and Yield models were update in Woodlot 4.3. This includes:


1. Adding the latest version of TIPSYS v4.4.2.0 This enhancement provides the following additional functionality:
 - Allows blending between Conifer and Deciduous.
 - New BTP file includes all VRI species codes.
 - Updated TIPSYS Species list in Woodlot.
 - Updated VRI species list with Latin and defined common species.
 - Removed DWB feature from Woodlot as no longer part of TIPSYS.
 - TIPSYS 4.3 was giving overly optimistic results for White Spruce (Sw) and was corrected in TIPSYS 4.4. The correction in TIPSYS may result in future AAC calculation reductions.
2. Adding the latest official version of VDYP (VDYP7Console 7.14b; 7, 14, 2, 61.)
3. Updating Woodlot, VDYP and TIPSYS to use Sindex version 1.52.

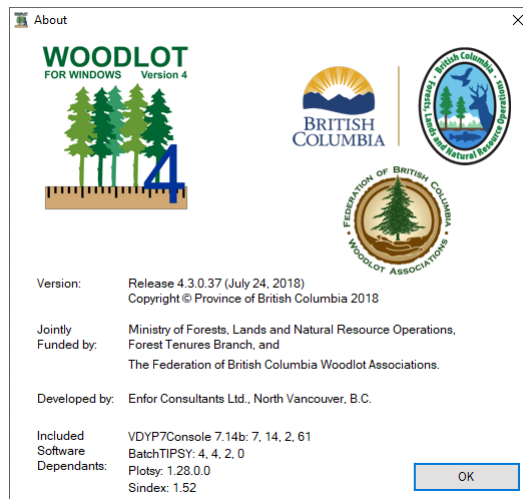

Column Filter Search Feature

In the Tabular View, Woodlot 4.3 included a new filter in the Column Filter. The Column Filter now has a new "Contains" filter in the selection window.

The columns list will filter to display only column names that contain the exact text in the "Contains" text box.

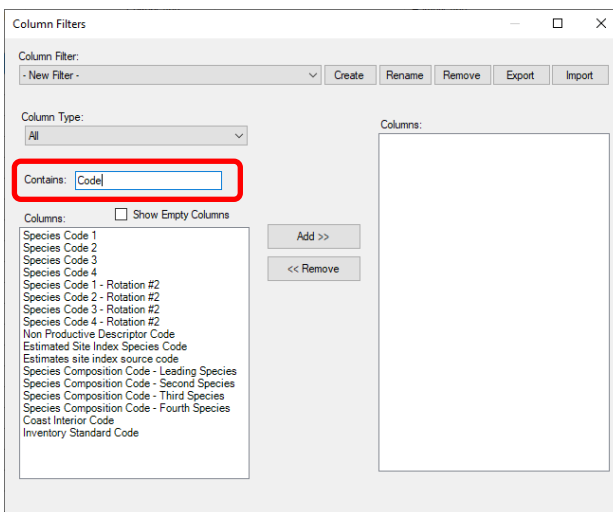

LRSY and MAI

LRSY is the theoretical Long-Run Sustained Yield, resulting in the maximum theoretical harvest level. In Woodlot, LRSY is based on:


1. Culmination MAI of the future stand x Net Woodlot area.
2. Net Woodlot area = Net area x THLB inclusion factor (if any).
3. Net Woodlot Area is also netted down to remove area listed in the “EXCLUDE from Woodlot” area constraints.

The LRSY is now displayed at on the Calculate AAC panel, located in the lower left corner of the Calculations tab.

You can set the harvest rate to use the LRSY annual rate by simply **clicking** on the underlined LRSY text.

The existing forest culmination MAI has been added to the Calculate AAC panel.

The Annual Increment has been added to the Advanced Annual harvest report.



Project Default Parameters (for BEC, Coast/Interior, Base Year)


Woodlot users now need to set the project default parameters before importing files, editing forest or calculating yields. Woodlot no longer always defaults to the Coast. Instead, Woodlot now defaults to a blank region until you set your region.

To do this, create your woodlot default parameters in the Project tab. To save your default parameters, from the main “File” menu, select “Save Project Defaults”. (Project defaults will be saved to the registry file.)

Graphs

Several new Graphs were added to the Reports menu. Click on the Reports menu to select one of the many graphs now available in Woodlot.

Note that the graphing utility “Plotsy” is used in Woodlot. Plotsy is developed as part of the TIPSy suite of tools for the Ministry. Refer also to the Plotsy Help menu for a user guide if you wish to undertake more complex graphing.

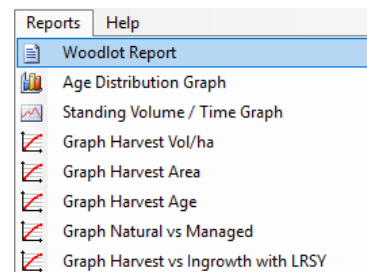

Report

The Woodlot report was updated to include a section to display polygon comments.

The header was updated to include project defaults.

Zoom selected polygons

A new zoom feature was added to the map.




Other Improvements

- Fixed column width issues on the Tabular screen.
- Adjusted Classifiers so they are not case sensitive.
- Improved column formatting in the Woodlot report.
- Force the BEC to refresh on each forest polygon if the global BEC is changed in the Project screen.
- Fixed the Area on FMLB Summary, section 2a in the Woodlot report.
- Fixed Volume per Hectare (VPH) rounding.

Implementation - Where to Get Woodlot 4.3

Woodlot 4.3 is available as a self-installing download from the Ministry Woodlot for Windows AAC Program webpage, located at: <https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool>

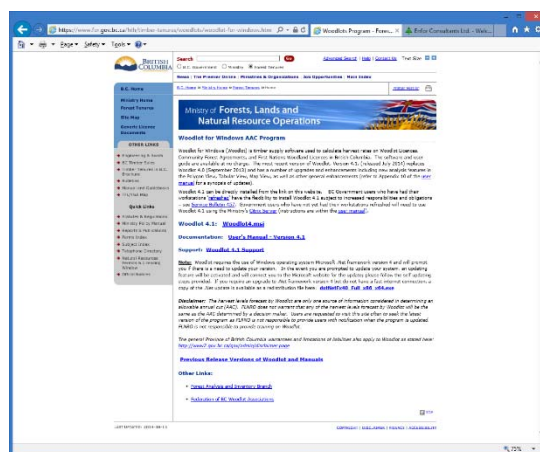

Ministry staff are asked to install Woodlot 4.3 to their local computer. For Ministry staff, the Woodlot Citrix server will be phased out. Please contact your IT department if any questions.

Questions

If any questions, please contact the Ministry of Forests, Lands and Natural Resource Operations, Geoff Klassen Geoffrey.Klassen@gov.bc.ca or Emma Neill Emma.Neill@gov.bc.ca.

Thank you for using Woodlot for Windows, we wish you success.




Woodlot 4.4 Updates

Introduction

Woodlot for Windows (Woodlot) is timber supply software used to calculate harvest rates on Woodlot Licences in BC's Woodlot Licence Program.

Woodlot version 4.4 (released April 2019) replaces Woodlot 4.3 (July 2018) and includes the following updates.

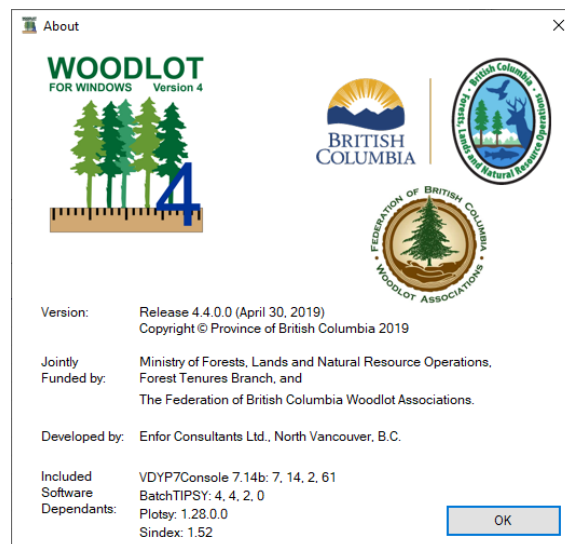

Harvest Schedule Reports

More summary reports have been added to the Harvest Schedule heading on the Calculation screen. The reports are based on your current run and match the same reporting sections in the Woodlot Report. You will need to run a harvest calculation to update the Harvest Schedule reports displayed. Summary reports include:

1. Info – summary information on the Woodlot.
2. Area – woodlot area summary.
3. Input – input data used.
4. Priority – the harvest priority you set in the Calculations screen.
5. Order – lists the polygons you force an order on.
6. Constraints – describes constraints used in your run.
7. Volume – volume summary.
8. Issues – summary of harvest issues by year and reason.
9. Skipped – listing of polygons not harvested and the reason why.

Harvest Schedule

☐ Polygon
 ☐ Annual
 ☐ Info
 ☒ Area
 ☐ Input
 ☐ Priority
 ☐ Order
 ☐ Constraints
 ☐ Volume
 ☐ Issues
 ☐ Skipped
 ☐ Advanced

Description	Area (ha)	Area (ha)	Volume (m ³)	Count
Total Area	2107.0		0.0	410
- Non Forest	0.0		0.0	0
- Non FMLB (VRI)		0.0	0.0	0
- Non FMLB (Lake)		0.0	0.0	0
- Non FMLB (Ocean)		0.0	0.0	0
= FMLB (forest management landbase)	2107.0		898,355.2	410
- Reduction		22.6	6,363.1	61
- Future Roads		0.0	0.0	0
= Net Area	2084.4		891,992.0	410
- Excluded (Constraints)	0.0		0.0	0
= Contributing Forest	2084.4		891,992.0	410
- Missing yield data		0.0	0.0	0
- Area Net down (constraint)		0.0	0.0	0
- Minimum Parameters Not met		242.5	7,188.1	47
- Silviculture System - Do Not Harvest		0.0	0.0	0
= THLB (timber harvesting landbase)	1841.8		884,803.9	363

Shapefile Import Updates

When importing polygons from a shapefile, Classifiers can now be used to uniquely identify sub polygons. Please see the updated User Guide for more details.

Shapefiles with duplicate stand identifiers (usually splinters from geo processing) will now be combined into a single resultant, in previous versions each duplicate shape replaced the previous one.



Map Toolbar

The Woodlot map buttons have been moved to a separate toolbar in the Map View (above the map) and new features added or enhanced.




New Map toolbar features and enhancements include:

4. Zoom Selected – clicking this button scales the map so the selected polygons (shown in hatching) fill the map window.
5. Zoom Current – clicking this button scales the map so the current (last selected) polygon fills the map window.
6. Labels – more map label options have been added including:
 - f. Automatic – Same as Woodlot 4.3.
 - g. Existing Forest – A label generated from the Existing Forest settings.
 - h. Future Forest – A label generated from the Future Forest settings.
 - i. VRI – The multi-line label imported from VRI.
 - j. Override – A custom label than can be specified on the Rename polygon screen.

Note: as a reminder, to select a polygon in the map view screen, hover your mouse and right-click the polygon. The polygon will display as a red hatch and can be zoomed to.

The Automatic label order is as follows:

4. Uses the “Map Label Override” from Rename Polygon (if it is not blank). To create the map label override, in the Polygon tab click the polygon number to activate the Rename Polygon dialogue box. In the Map Label Override box type in your new label. This will display on the small map and on the main map. Otherwise,

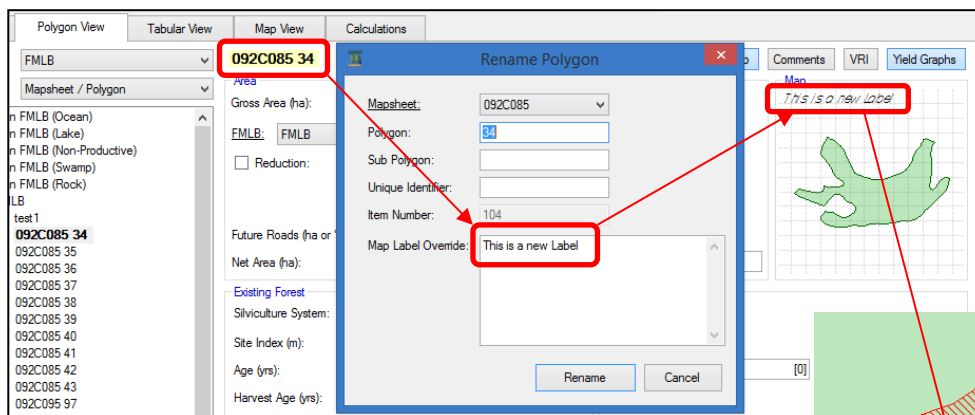

5. Use the VRI “Full Label” if there is VRI data for this polygon. The Full Label column can be viewed in the Tabular View. Otherwise,
6. Uses the label based on the Existing Forest “FC Label” from the Woodlot Report b) Polygon Data table.



Stands with more than one Resultant

A stand can be made up of more than one resultant. The stand is linked to the existing forest, harvesting and future forest information. The resultants contain the Classifiers and are linked back to the stand.


The polygon list now shows the resultants as follows:

- A resultant that is only part of the stand will be displayed with a half-gray bar, and
- There will either be a sub polygon identifier or a “(piece #)” suffix.

The small map has also been updated to display the other resultants linked to this stand in gray.

Please refer to the User Guide for a description of this feature.


Right clicking on a polygon will bring up a context menu that allows you to unlink a resultant from the stand so it can be edited independently.

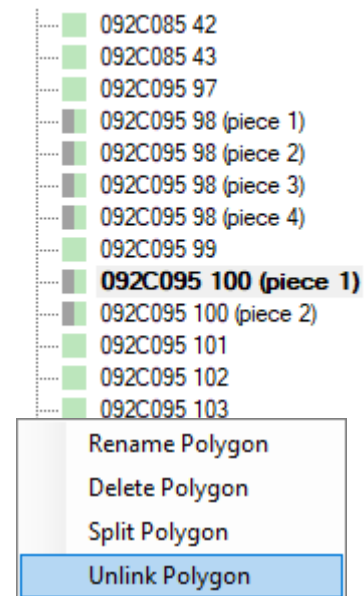

Other Improvements


Some other improvements in Woodlot 4.4 include:

- Woodlot now validates the project settings before allowing you to view a yield curve. A warning message will be displayed if you have not set your region or other project default parameters in the Project tab. If you get this warning, please return to the Project tab to check and update your project defaults.
- Stand age checking has been updated. Entering a stand age of 0 or lower was setting established year to 0 not relative to the current year like 2019. For example, now if the age is less than -20 then the stand age will be set to 0 and an “n/a” will be displayed. If the year is 2019 and -20 is entered the established year would be 2039 (2019 - -20), but if -21 was entered the stand age would be set to 0 and n/a would be displayed.
- The Disable PC feature now also forces the harvest priorities to treat PC as CC.

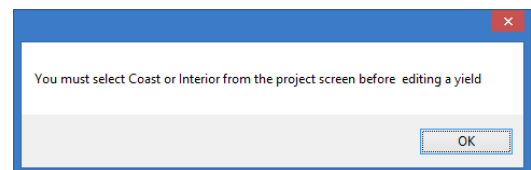

Implementation - Where to Get Woodlot 4.4

Woodlot 4.4 is available as a self-installing download from the Ministry Woodlot for Windows AAC Program webpage, located at: <https://www2.gov.bc.ca/gov/content/industry/forestry/forest-tenures/timber-harvesting-rights/woodlot-licence/allowable-annual-cut-calculator-tool>

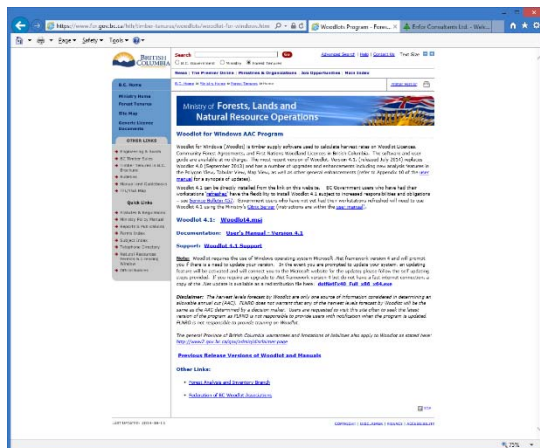

Ministry staff are asked to install Woodlot 4.4 to their local computer. Please contact your IT department if any questions.

Questions

If any questions, please contact the Ministry of Forests, Lands, Natural Resource Operations and Rural Development, Emma Neill Emma.Neill@gov.bc.ca.

Thank you for using Woodlot for Windows, we wish you success.

