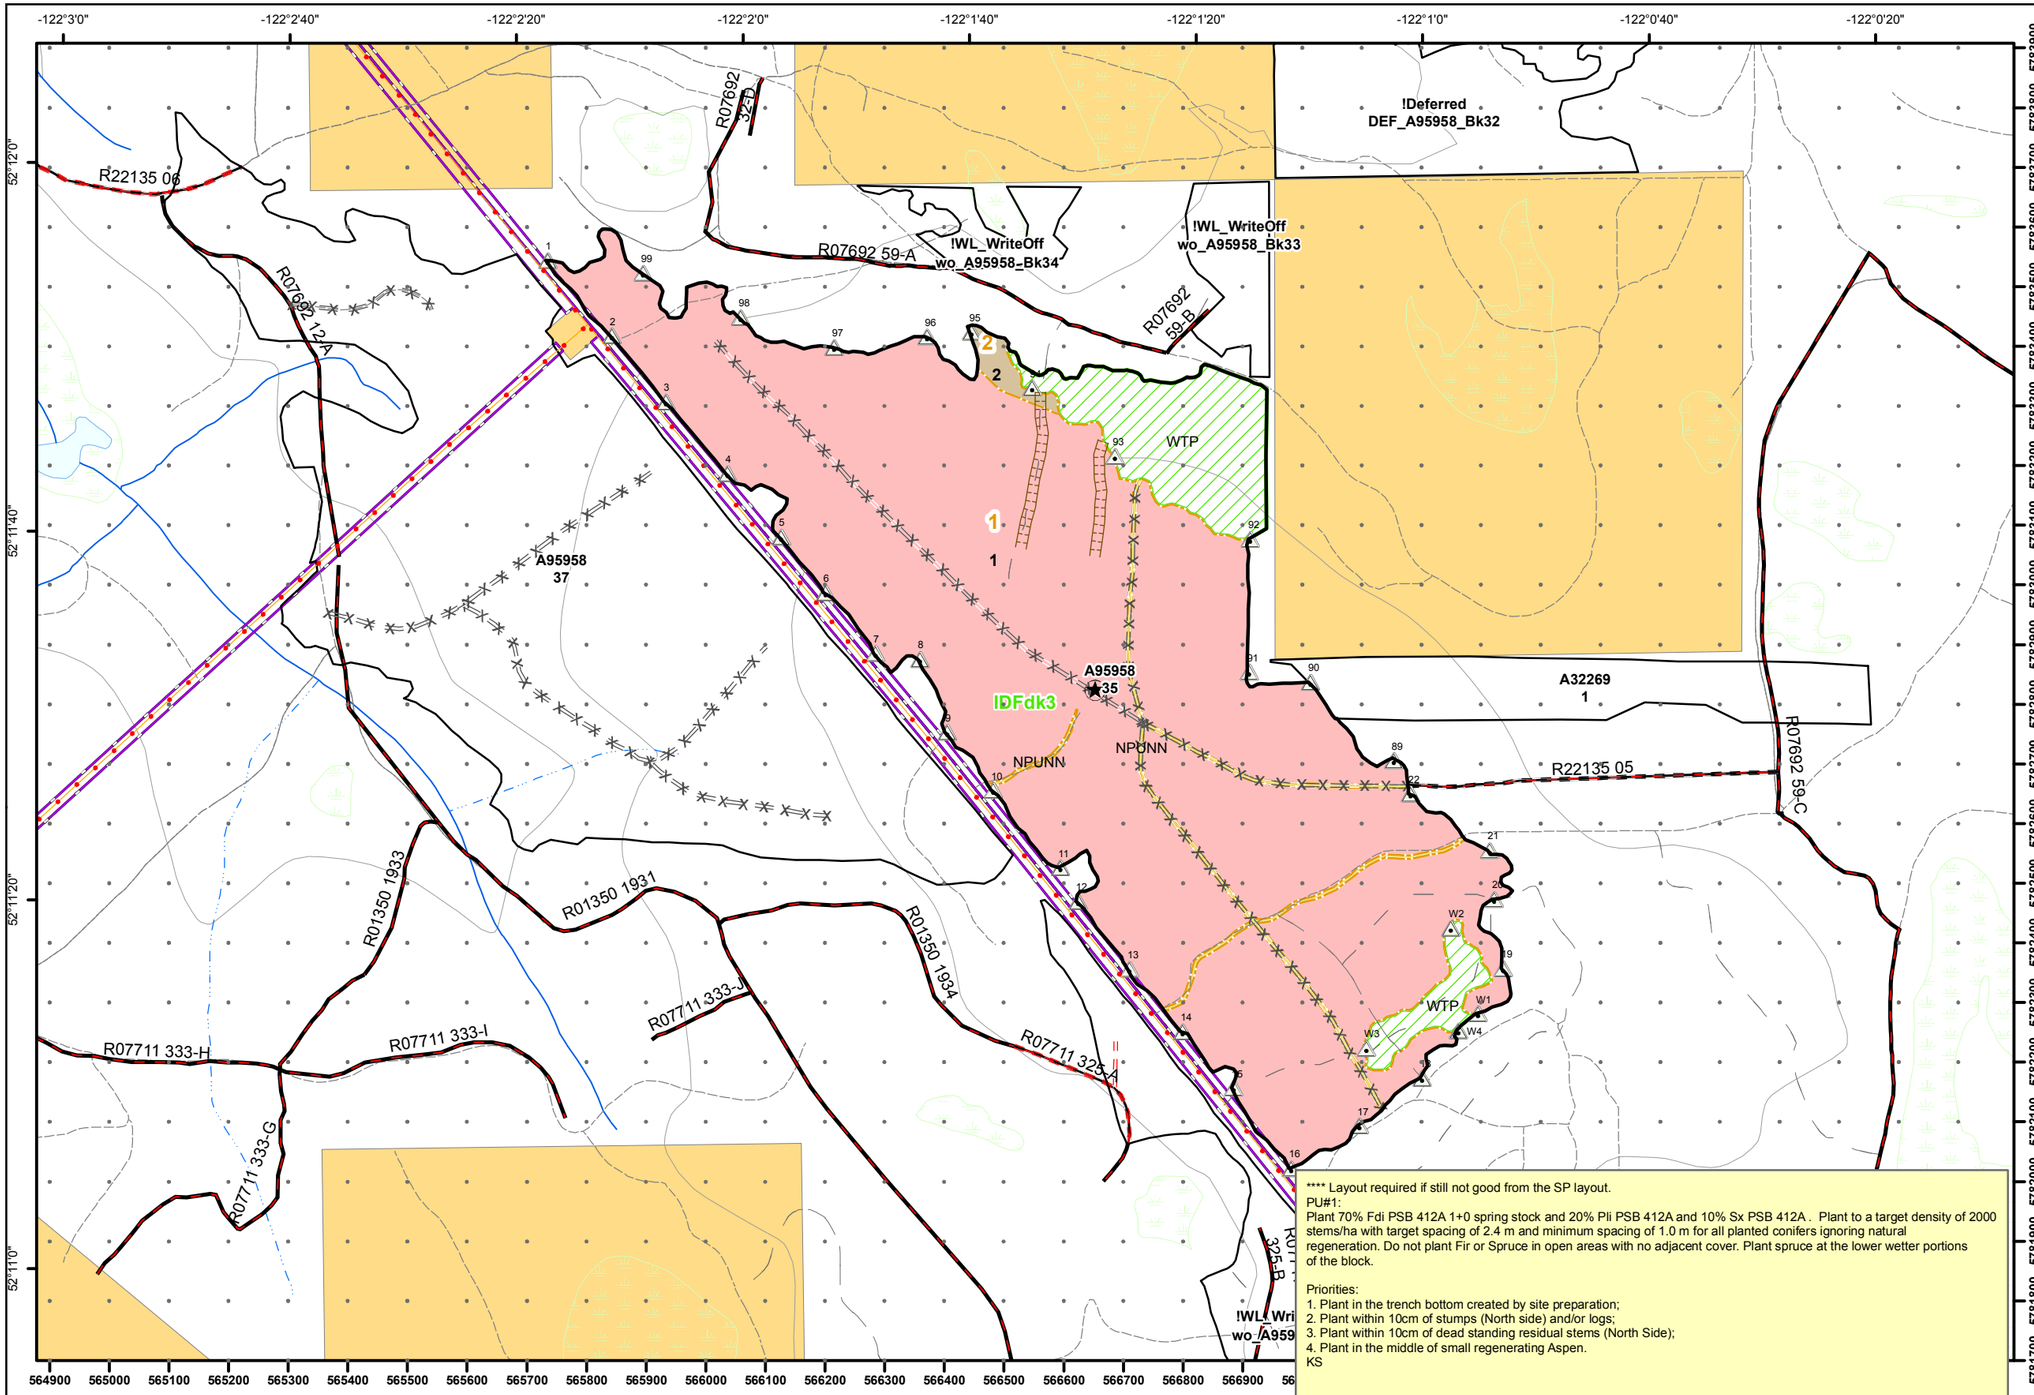

Planting Unit	Area (ha)	Status	Density (/ha)	Spacing (m) Target	Min	Max	Trees / Unit	Species Composition Detail *
								*(Species - Species % - Stock Age - Stock Type - Request Key - Seedlot - # Trees/Species)
1	81.19	Planned	2000				162389	Sx-10-0+0-none-none-none-16239, Pli-20-0+0-none-none-none-32478, Fdi-70-0+0-none-none-none-113672
2	.72	Planned	2000				1439	Sx-10-0+0-none-none-none-144, Pli-20-0+0-none-none-none-288, Fdi-70-0+0-none-none-none-1007
		Planned						

Access Instructions

Starting from the Cariboo Hwy, turn onto Likely Rd. At 4.5 km turn left to stay on Likely Rd and after another 7 km turn left onto Mountain House Road. After 1.9 km, turn left onto Mountain House Rd-01. Stay on Mountain House Rd-01 for 3.9 km before reaching the PoC for Mountain House Rd-01-02. Follow the proposed road for 620 meters to Block 35 boundary. In July of 2021 a water hole on mainline restricts access only to quads.
KS

**** Layout required if still not good from the SP layout.
PU#1:
Plant 70% Fdi PSB 412A 1+0 spring stock and 20% Pli PSB 412A and 10% Sx PSB 412A . Plant to a target density of 2000 stems/ha with target spacing of 2.4 m and minimum spacing of 1.0 m for all planted conifers ignoring natural regeneration. Do not plant Fir or Spruce in open areas with no adjacent cover. Plant spruce at the lower wetter portions of the block.

Priorities:
1. Plant in the trench bottom created by site preparation;
2. Plant within 10cm of stumps (North side) and/or logs;
3. Plant within 10cm of dead standing residual stems (North Side);
4. Plant in the middle of small regenerating Aspen.
KS

PU#2:
This area overlaps Migratory bird nest habitat (Rank 4). No mechanical activity May 20-July 21.
For planting keep mechanical equipment such as quads moving and turned off as much as possible to avoid prolonged "sensory disturbance" of the nesting birds".

Plant 70% Fdi PSB 412A 1+0 spring stock and 20% Pli PSB 412A and 10% Sx PSB 412A Plant to a target density of 2000 stems/ha with target spacing of 2.4 m and minimum spacing of 1.0 m for all planted conifers ignoring natural regeneration. Do not plant Fir in open areas with no adjacent cover.

Priorities:
1. Plant in the trench bottom created by site preparation;
2. Plant within 10cm of stumps (North side) and/or logs;
3. Plant within 10cm of dead standing residual stems (North Side);
4. Plant in the middle of small regenerating Aspen.
KS

BCTS
BC Timber Sales

Planting Map

TSL **A95958**	Block ID 35
Business Area Cariboo-Chilcotin	UBI BL839
Operating Area Cariboo	Management Unit Williams Lake
Gross Block Area 92.15	NAR 81.91
Min. Elev. 940 / Max. Elev. 980	Geographic Center **Latitude** 52 11 31 **Longitude** -122 01 28
Location Hawks	Opening 93B 020 260

Planting Unit
1
2

BCTS All Blocks
Block of Interest
Ecology Unit
Biogeoclimatic Zone

BCTS GPS Stations
GPS Station
Block Bdy Hub
Falling Corners
Reference Trees

BCTS Layout Points
Ecology Plot
Block Centre
Woody Debris
Landing Cable
Landing Ground
R/W Landing
Slump/Slide Area
Rock Outcrops
Cross Ditch
Arch Pipe
Arch Pipe, Proposed
Culvert
Culvert, Proposed
Bridge
Bridge, Proposed
Bridge, Condemned
Removed Structures
Gate
Road Barrier
Cattle Guard
Pipeline Crossing
Cave/ Den
Mineral Lick
Nest
Wildlife Tree
Wildlife Feature

BCTS Line Features
Fence Line
Other Trail
Pipe Line
Rec Trail
Seismic Line
Cliff
Draw
Embankment
Gully
Ridge
Slope Break
Cultural/Heritage Feature

BCTS Streams Class
Unknown
INT;NCD
S1;S2;S3;S4
S5;S6

BCTS Roads - Road State
Deactivated Road
Existing Road
Proposed Road
Unknown/NULL
Rehab Road

TRIM Features
River or Stream - Definite
River or Stream - Indefinite
Contour - Index
Contour - Intermediate
Road Permit
Forest Service Road
Highway/Main/Paved Road
Gravel/Resource Road
Trail
Snow Shed (Railway)
Tunnel
Bridge
Airstrip
Rail Line
Pipeline / Wellsite

CLA
WTP
WTRA
NP Permanent Access
Reserve
NP Immature
Area of Concern
Slope Area (>35%)
SAR Cliff
SAR Forested
SAR Rare Ecosystems
Special Mgmt Area
Tailing Pond
Lake/Watercourse
Marsh
Swamp
Private Land
Protected Areas/ Parks

Riparian Features
MFZ / MSZ
RMZ
RRZ

0 100 200 300 400 500 Meters
1:10,000

Date August 22, 2022 **User** MRHEES
Template Name BlockPlantingMap_NFiscal_11x17L_v3
Coordinate System NAD 1983 UTM Zone 10N