
Planting Map

BCTS
BC Timber Sales

TSL	Block ID
A95958	11
Business Area: Cariboo-Chilcotin	UBI: BL80L
Operating Area: Cariboo	Management Unit: Williams Lake
Gross Block Area: 127.45	NAR: 95.68
Min. Elev.: 820 / Max. Elev.: 940	Geographic Center — Latitude / Longitude: -
Location: Hawks	Opening

Planting Unit
1

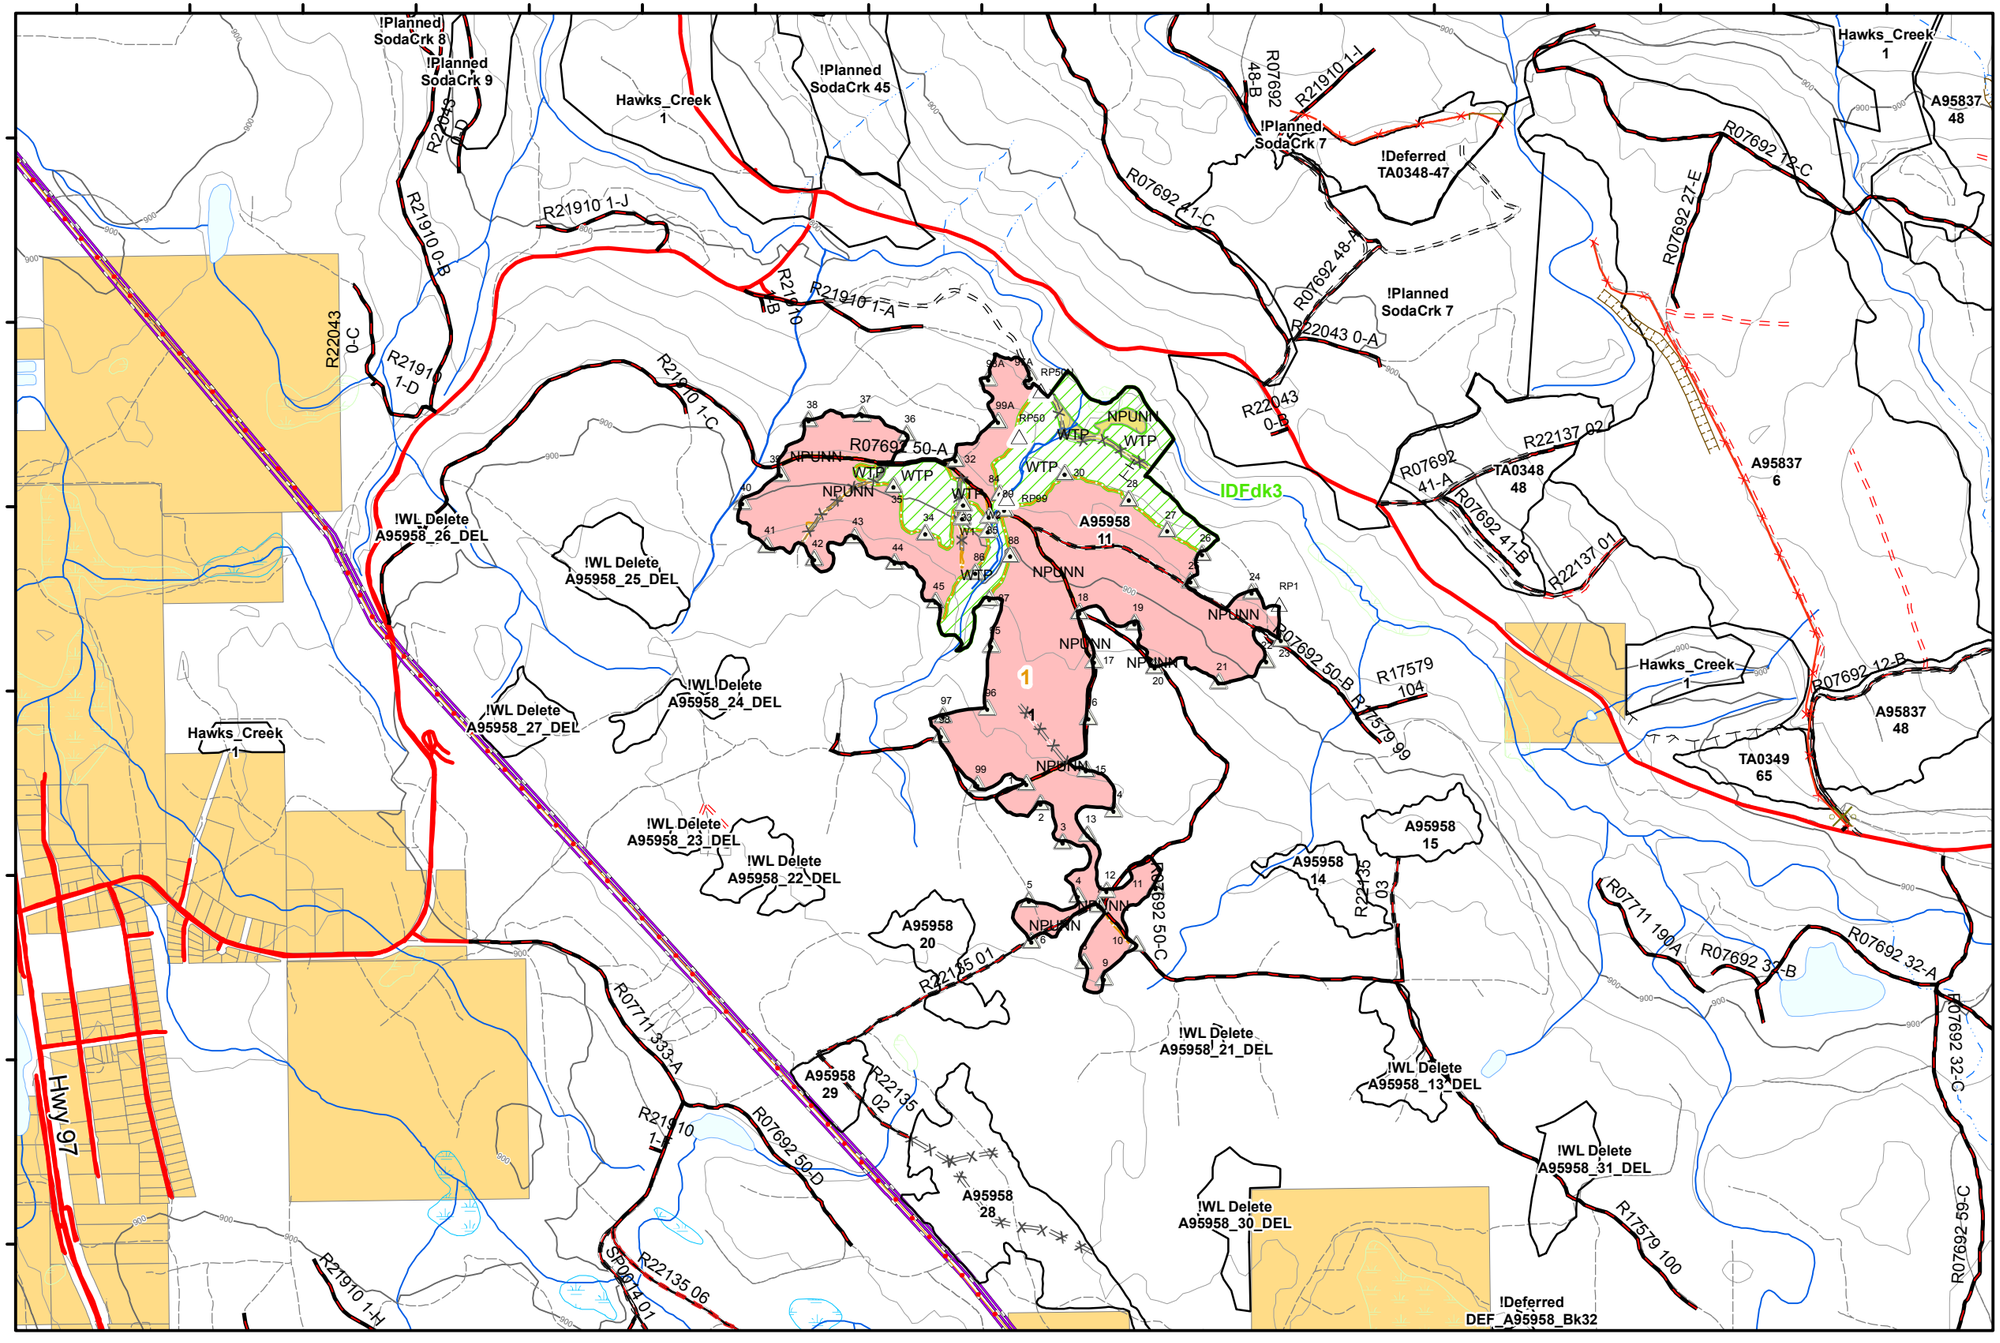

BCTS All Blocks
Block of Interest
Ecology Unit
Biogeoclimatic Zone

BCTS GPS Stations
GPS Station
Block Bdy Hub
Falling Corners
Reference Trees

BCTS Layout Points
Ecology Plot
Block Centre
Woody Debris
Landing Cable
Landing Ground
R/W Landing
Slump/Slide Area
Rock Outcrops
Cross Ditch
Arch Pipe
Arch Pipe, Proposed
Culvert
Culvert, Proposed
Bridge
Bridge, Proposed
Bridge, Condemned
Removed Structures
Gate
Road Barrier
Cattle Guard
Pipeline Crossing
Cave/ Den
Mineral Lick
Nest
Wildlife Tree
Wildlife Feature

BCTS Line Features
Fence Line
Other Trail
Pipe Line
Rec Trail
Seismic Line
Cliff
Draw
Embankment
Gully
Ridge
Slope Break
Cultural/Heritage Feature

BCTS Streams Class
Unknown
INT;NCD
S1;S2;S3;S4
S5;S6

BCTS Roads - Road State
Deactivated Road
Existing Road
Proposed Road
Unknown/NULL
Rehab Road

TRIM Features
River or Stream - Definite
River or Stream - Indefinite
Contour - Index
Contour - Intermediate
Road Permit
Forest Service Road
Highway/Main/Paved Road
Gravel/Resource Road
Trail
Snow Shed (Railway)
Tunnel
Bridge
Airstrip
Rail Line
Pipeline / Wellsite

CLA
WTP
WTRA
NP Permanent Access
Reserve
NP Immature
Area of Concern
Slope Area (>35%)
SAR Cliff
SAR Forested
SAR Rare Ecosystems
Special Mgmt Area
Tailing Pond
Lake/Watercourse
Marsh
Swamp
Private Land
Protected Areas/ Parks

Riparian Features
MFZ / MSZ
RMZ
RRZ

0 200 400 600 800 1,000 Meters
1:20,000

Planting Unit	Area (ha)	Status	Density (/ha)	Spacing (m) Target	Min	Max	Trees / Unit	Species Composition Detail *
1	95.676467	Planned Planned	2000				191600	*(Species - Species % - Stock Age - Stock Type - Request Key - Seedlot - # Trees/Species) Sx-10-0+0-none-none-none-19160, Pli-20-0+0-none-none-none-38320, Fdi-70-0+0-none-none-none-134120

Comments:
PU #1
Plant 70% Fdi PSB 412A 1+0, 20% Pli PSB 410 1+0 and 10% Sx PSB 412A 1+0. Plant to a target density of 2000 stems/ha with target spacing of 2.4 m and minimum spacing of 1.8 m for all planted conifers ignoring natural regeneration. Plant Pl in the rehabbed road area. Do not plant Douglas-fir in open areas with no coarse woody debris close by.
Priorities:
1. Plant in the trench bottom created by site preparation;
2. Plant within 10cm of dead standing residual stems (North Side);
3. Plant within 10cm of stumps (North side) and/or logs;
4. Plant in the middle of small regenerating Aspen.
KG

Access Instructions
Starting on Highway 97 at the intersection of MacKenzie Ave N, drive for approximately 9.2 km then turn right onto Westcoast road. After another 2.3 km, turn right onto Westcoast Rd-01. From the beginning of Westcoast Rd-01, drive for approximately 2 km before reaching the northwestern block boundary.

Date June 03, 2022 **User** JAMOORE
Template Name BlockPlantingMap_NFiscal_11x17L_v3
Coordinate System NAD 1983 UTM Zone 10N